


THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT BY ALL RIGHTS RESERVED

LOC	DIST	REVISIONS			
		P	LIR	DESCRIPTION	DATE
FB	00		A2	REVISED PER	ECR-16-012124
					07DEC16
					T.Q
					W.H

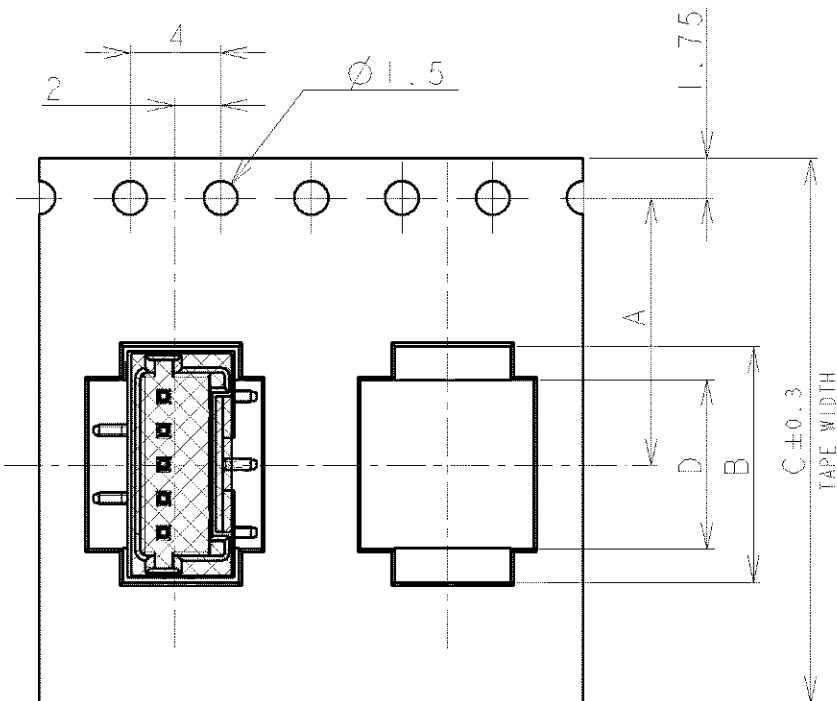

TYPE 1


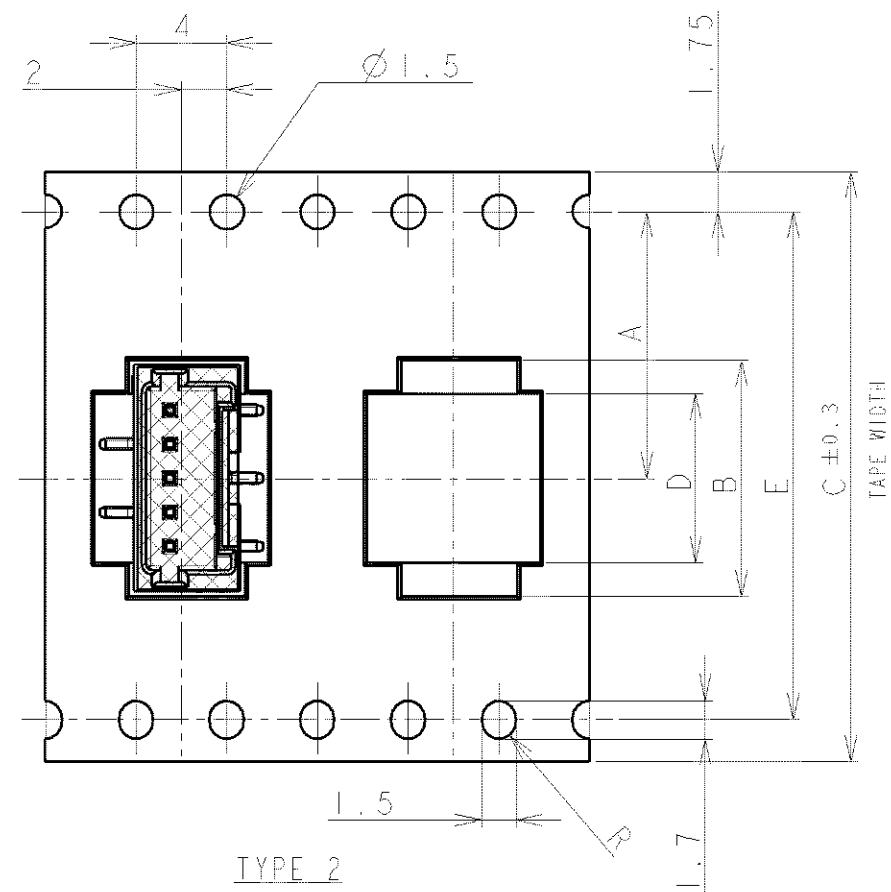



TYPE 2

TOLERANCES UNLESS OTHERWISE SPECIFIED:


10> : ±0.2
30> * >10 : ±0.25
100> * >30 : ±0.3
ANGLE : ±3°

NOTE:
1. PEELING STRENGTH: 0.20-0.69N (20-70gf)
PEELING ANGLE: 165-180°
PEELING SPEED: 300mm/MINUTE.

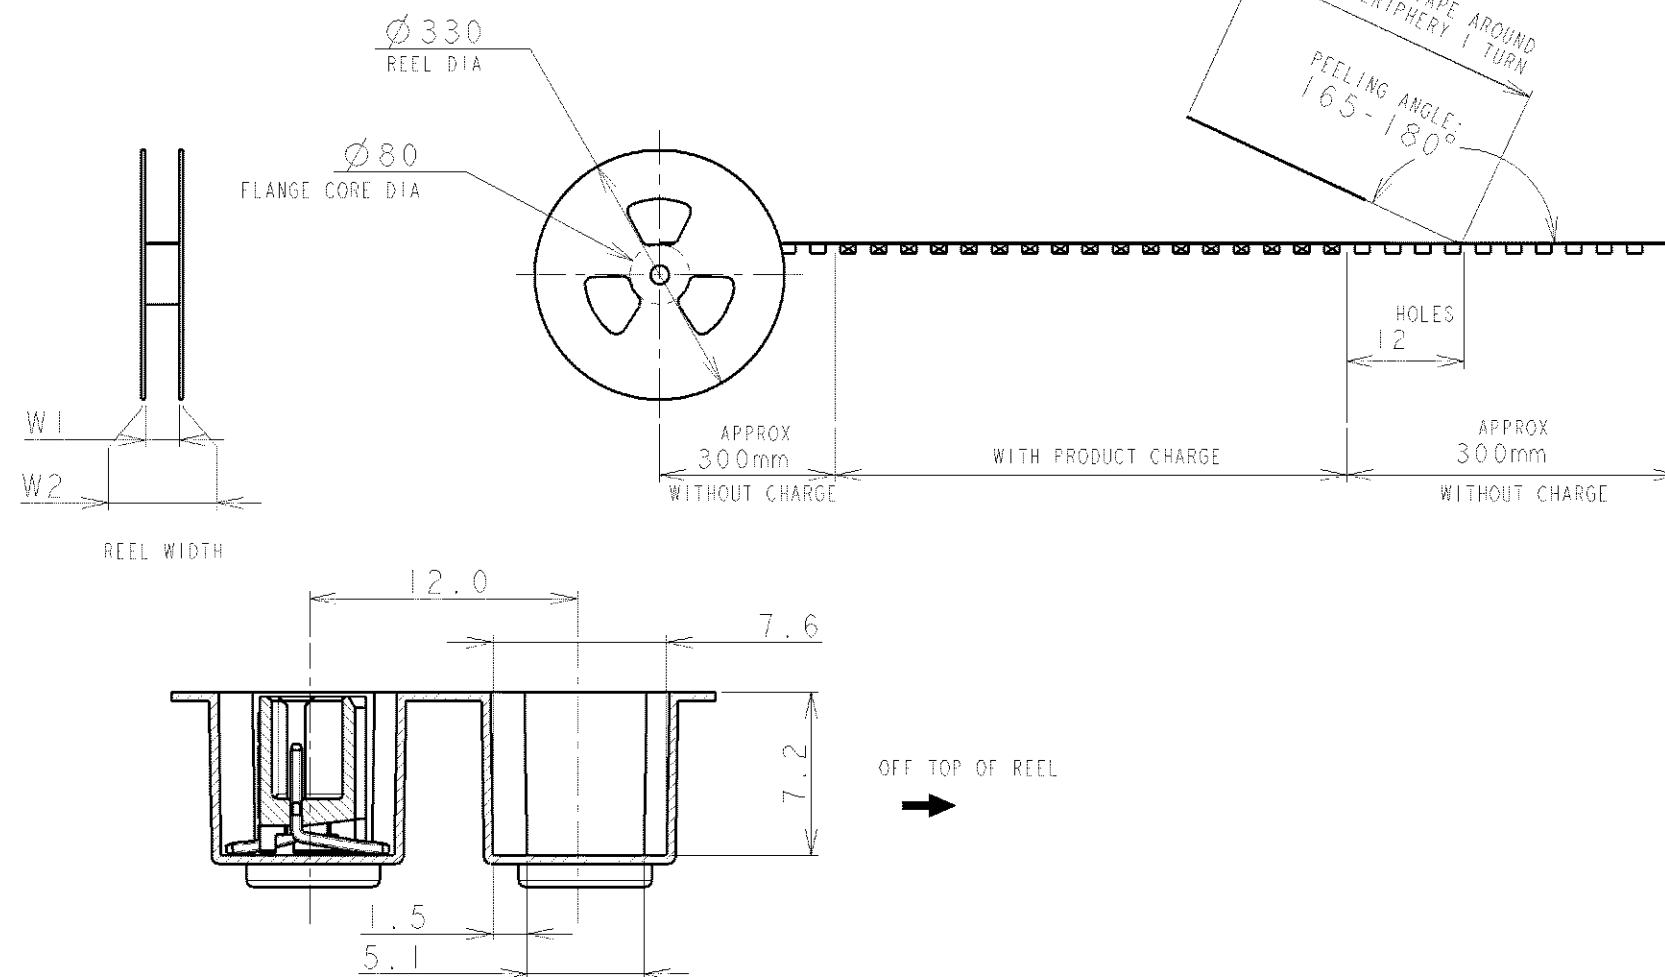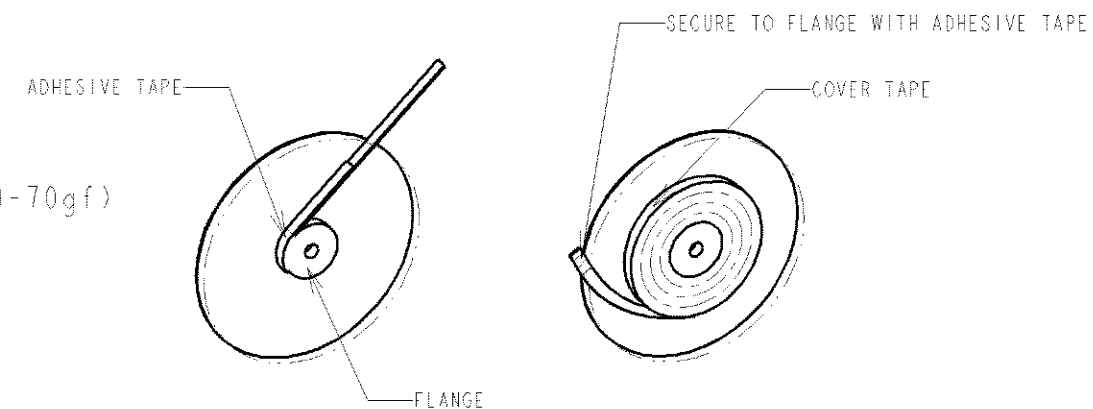

		DWN S. XU 31JAN03	 TE Connectivity	
		CHK S. YAO 31JAN03		
DIMENSIONS: mm		APVD T. SASAKI 31JAN03	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS, POLYIMIDE TAPE, EMBOSS TAPE PACKAGED	
		PRODUCT SPEC 108-60018	SIZE A3	
		APPLICATION SPEC 114-5223		
MATERIAL -		WEIGHT -	DRAWING NO C-292232	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE NON
				SHEET 1
				OF 4
				REV A2

LOC	DIST	REVISIONS				DATE	DWN	APVD
FB	00	P	LTR	DESCRIPTION				
SEE SHEET 1								

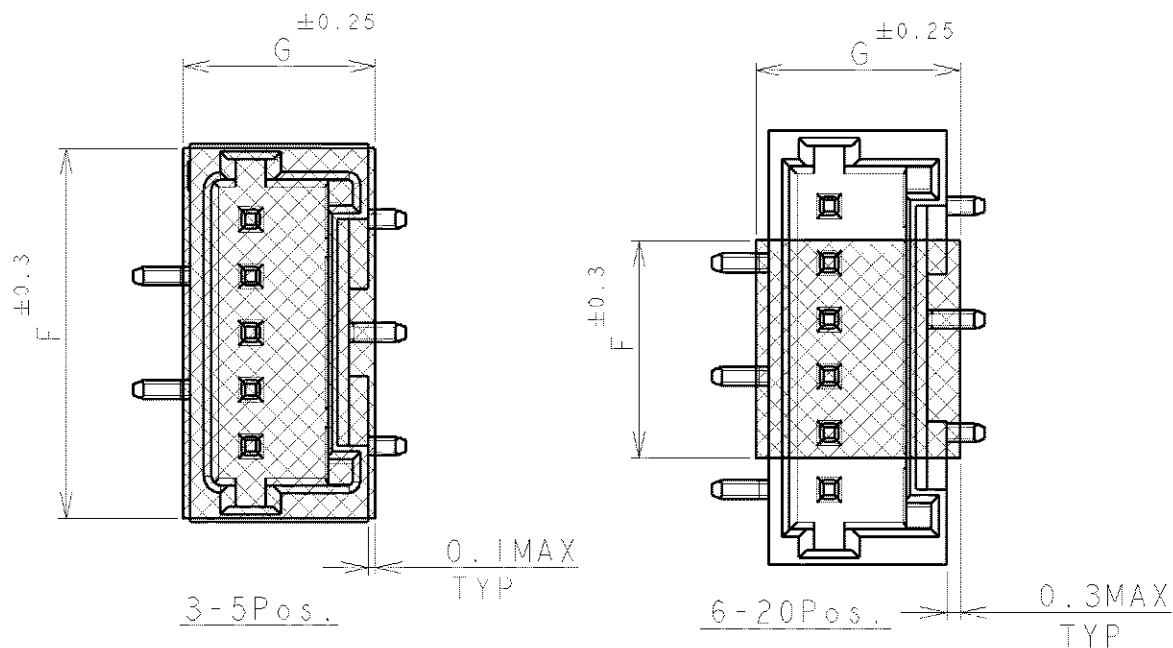

TYPE 2	49.5	45.5	5.0	9.5	40.4	29.9	44	32.9	20.2±0.15	500	20	BEIGE	2-292232-0	
	49.5	45.5	5.0	9.5	40.4	28.4	44	31.4		500	19		1-292232-9	
	49.5	45.5	5.0	9.5	40.4	26.9	44	29.9		500	18		1-292232-8	
	49.5	45.5	5.0	9.5	40.4	25.4	44	28.4		500	17		1-292232-7	
	49.5	45.5	5.0	9.5	40.4	23.9	44	26.9		500	16		1-292232-6	
	49.5	45.5	5.0	9.5	40.4	22.4	44	25.4		500	15		1-292232-5	
	49.5	45.5	5.0	9.5	40.4	20.9	44	23.9		500	14		1-292232-4	
	49.5	45.5	5.0	9.5	40.4	19.4	44	22.4		500	13		1-292232-3	
	37.5	33.5	5.0	9.5	28.4	17.9	32	20.9		14.2	500		12	1-292232-2
	37.5	33.5	5.0	9.5	28.4	16.4	32	19.4		14.2	500		11	1-292232-1
37.5	33.5	5.0	9.5	28.4	14.9	32	17.9	14.2	500	10	1-292232-0			
37.5	33.5	5.0	6.5	28.4	13.4	32	16.4	14.2	500	9		292232-9		
TYPE 1	29.5	25.5	5.0	6.5	-	11.9	24	14.9	11.5	500	8		292232-8	
	29.5	25.5	5.0	6.5	-	10.4	24	13.4	11.5	500	7		292232-7	
	29.5	25.5	5.0	6.5	-	8.9	24	11.9	11.5	500	6		292232-6	
	29.5	25.5	5.0	9.5	-	7.4	24	10.4	11.5	500	5		292232-5	
	21.5	17.5	5.0	8.0	-	5.9	16	8.9	7.5	500	4		292232-4	
	21.5	17.5	5.0	6.5	-	4.4	16	7.4	7.5	500	3		292232-3	
TAPE TYPE	W2	W1	G	F	E	D	C	B	A	QTY/REEL	POS	COLOR	ON TAPE P/N	
DIMENSIONS														

DIMENSIONS: mm	DWN	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	CHK		
	APVD	TE Connectivity	
	PRODUCT SPEC	NAME AMP Mini Common Terminated (CT) Connector 1.5mm PITCH	
	SEE SHEET 1	SINGLE ROW POST HDR ASS'Y (V) SMT TYPE	
	APPLICATION SPEC	WITH POLYIMIDE TAPE, WITH BOSS, EMOSS TAPE PACKAGED	
	SEE SHEET 1	SIZE	RESTRICTED TO
	WEIGHT	CAGE CODE	
	CUSTOMER DRAWING	DRAWING NO	
		A4 00779	G-292232
		SCALE	NON
		SHEET	2
		OF	4
		REV	A2

4

3

2








1

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

COPYRIGHT BY ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS				DATE	DWN	APVD
FB	00	P	LIR	DESCRIPTION				
				SEE SHEET 1				

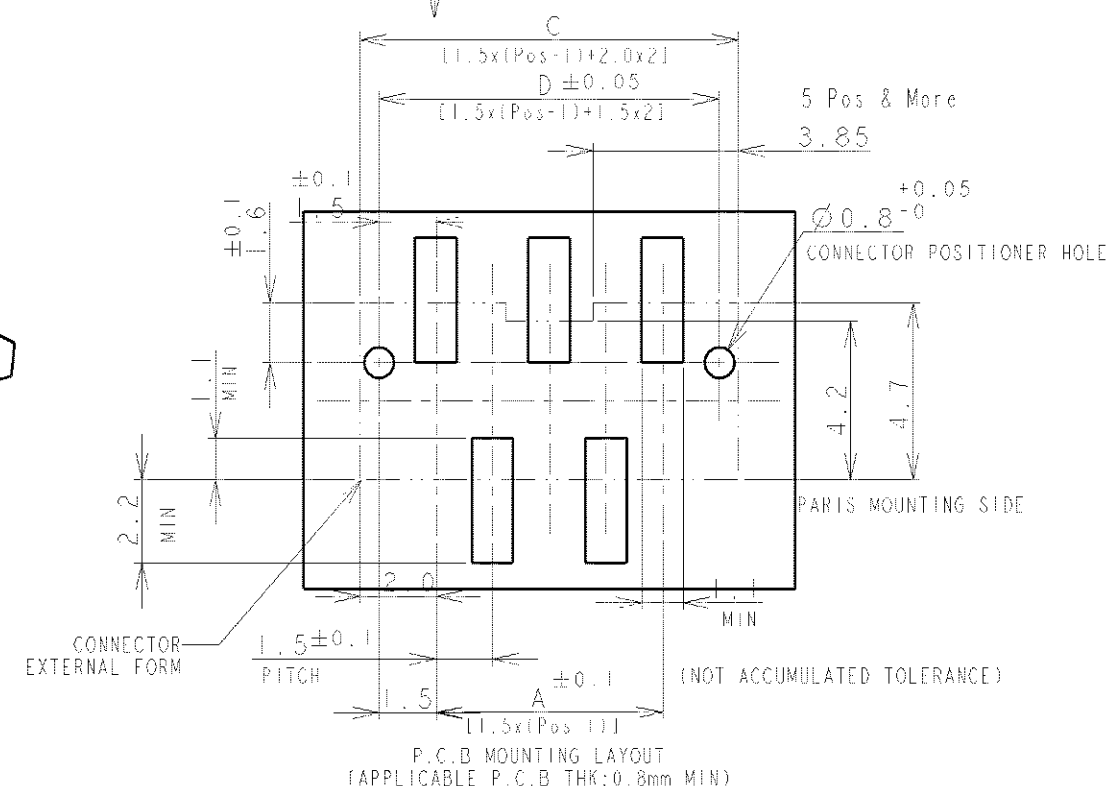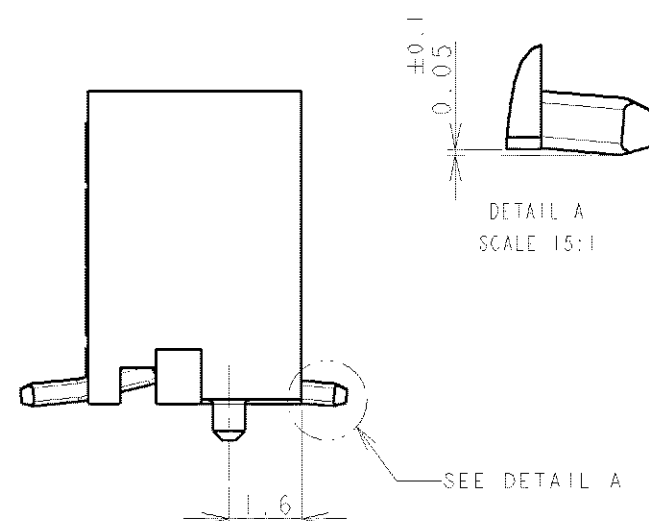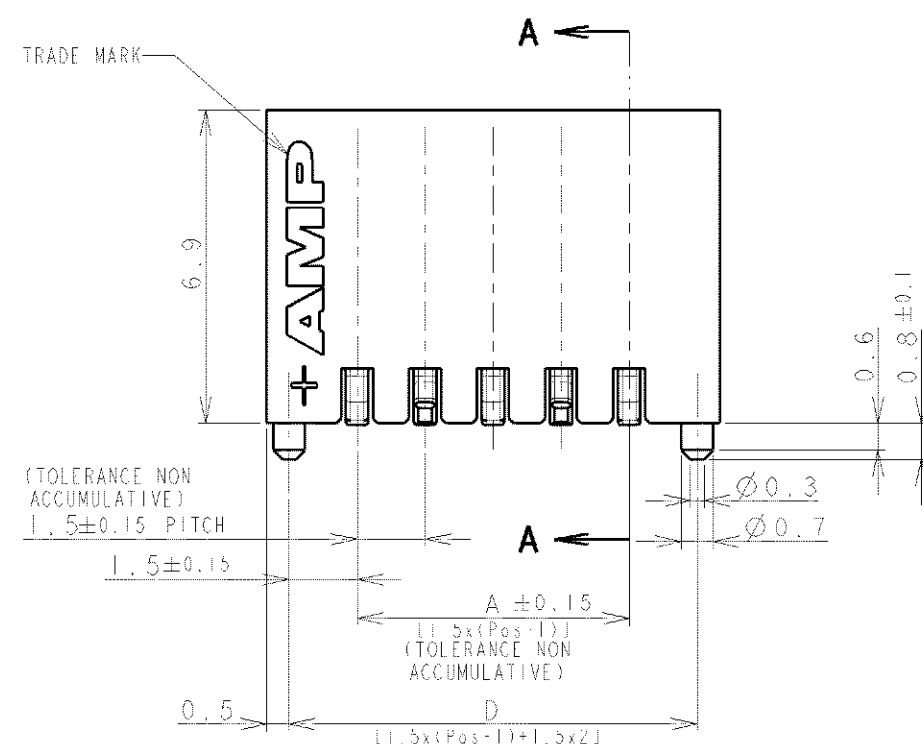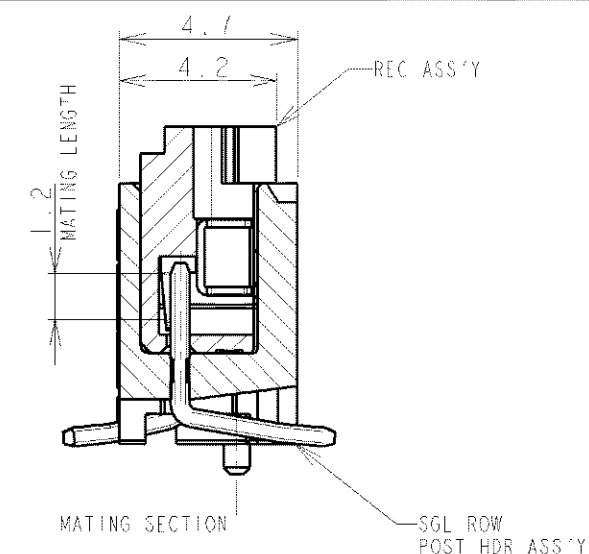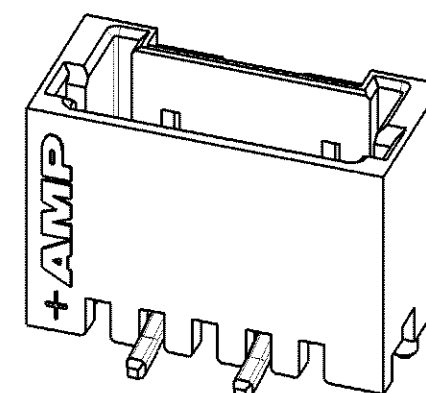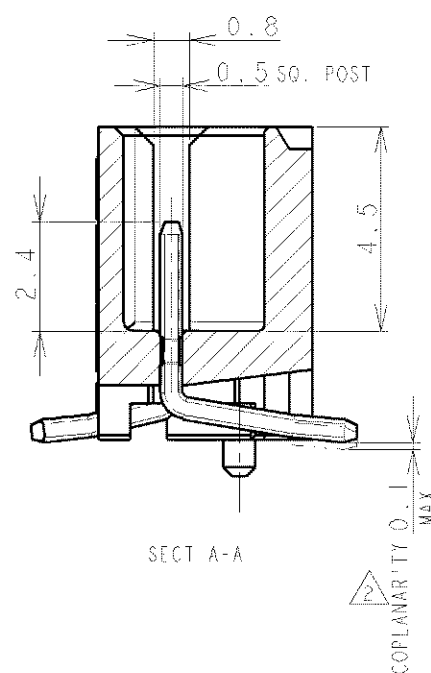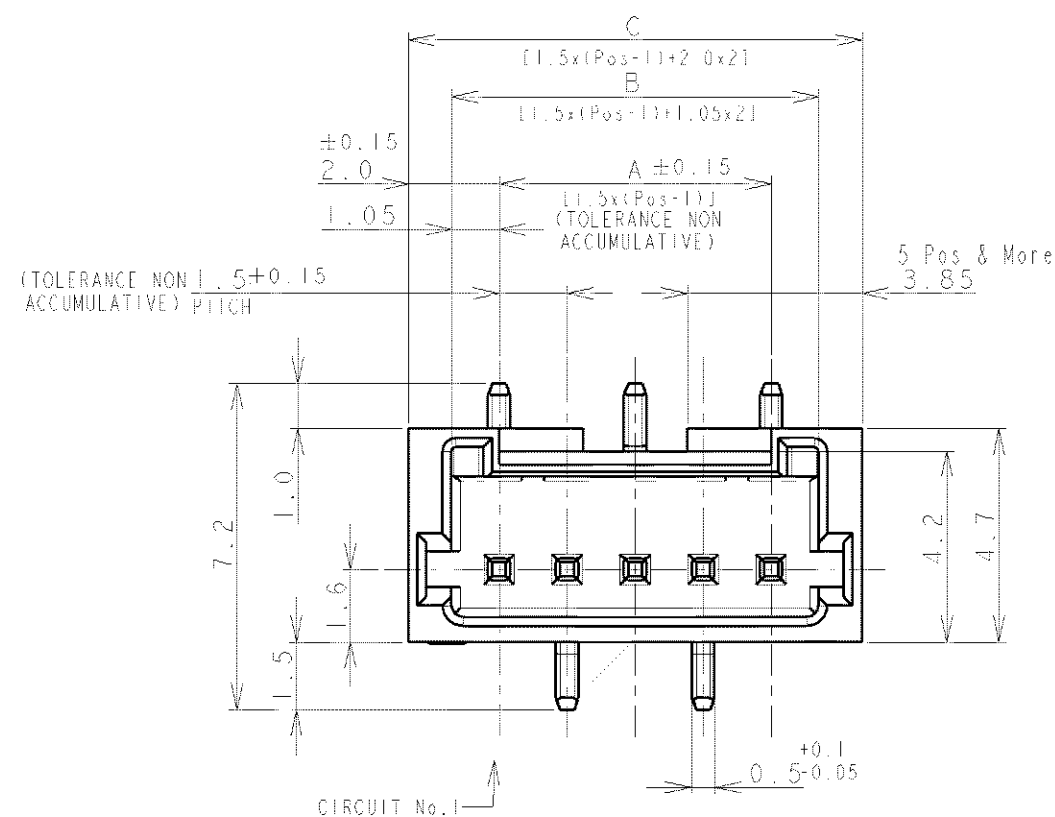

SHOWN AS WIHTOUT TAPE

NOTES:

- MATERIAL: HOUSING: GLASS FILLED, HIGH HEAT RESISTANT NYLON, UL94V-0, COLOR: BEIGE OR BLACK
POST: Sn-100% BRASS WIRE
- TO BE MEASURED WITH CONNECTOR PLACED ON HORIZONTAL DATUM SURFACE, FLOAT OF SOLDER TINE FROM DATUM SURFACE IS 0.1mm MAX.

		DWN ---			TE Connectivity	
DIMENSIONS: mm		CHK ---	NAME AMP MINI COMMON TERMINATION (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS			
		APVD ---				
0 PLC ± 1 PLC ± 2 PLC + 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC ---				
		APPLICATION SPEC ---				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
SEE NOTE 1			A3	00779	G-292232	
SEE NOTE 1		CUSTOMER DRAWING			SCALE	SHEET
					NON	3
						OF 4
					REV	A2

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

BY

© COPYRIGHT

LOC	DIST	REVISIONS					
FB	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1	-	-	-

0.98	31.5	32.5	30.6	28.5	20	2-292232-0
0.93	30.0	31.0	29.1	27.0	19	1-292232-9
0.89	28.5	29.5	27.6	25.5	18	1-292232-8
0.84	27.0	28.0	26.1	24.0	17	1-292232-7
0.80	25.5	26.5	24.6	22.5	16	1-292232-6
0.75	24.0	25.0	23.1	21.0	15	1-292232-5
0.71	22.5	23.5	21.6	19.5	14	1-292232-4
0.66	21.0	22.0	20.1	18.0	13	1-292232-3
0.62	19.5	20.5	18.6	16.5	12	1-292232-2
0.57	18.0	19.0	17.1	15.0	11	1-292232-1
0.52	16.5	17.5	15.6	13.5	10	1-292232-0
0.48	15.0	16.0	14.1	12.0	9	292232-9
0.43	13.5	14.5	12.6	10.5	8	292232-8
0.39	12.0	13.0	11.1	9.0	7	292232-7
0.34	10.5	11.5	9.6	7.5	6	292232-6
0.30	9.0	10.0	8.1	6.0	5	292232-5
0.25	7.5	8.5	6.6	4.5	4	292232-4
0.20	6.0	7.0	5.1	3.0	3	292232-3
WEIGHT (g)	D	C	B	A	Pos.	BEIGE (NAT)
	DIMENSIONS					P/N

DIMENSIONS: mm	DWN	MATERIAL SEE SHEET 1	FINISH SEE SHEET 1
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK	 TE Connectivity	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±	APVD		
	PRODUCT SPEC	NAME AMP MINI COMMON TERMINATED (CT) CONNECTOR 1.5 mm PITCH SINGLE ROW POST HDR ASS'Y (V) SMT TYPE WITH BOSS	
	APPLICATION SPEC	SIZE A4	CAGE CODE 00779
	WEIGHT	DRAWING NO G=292232	RESTRICTED TO
CUSTOMER DRAWING		SCALE NON	SHEET 4 OF 4
		REV A2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-292232-7](#)