


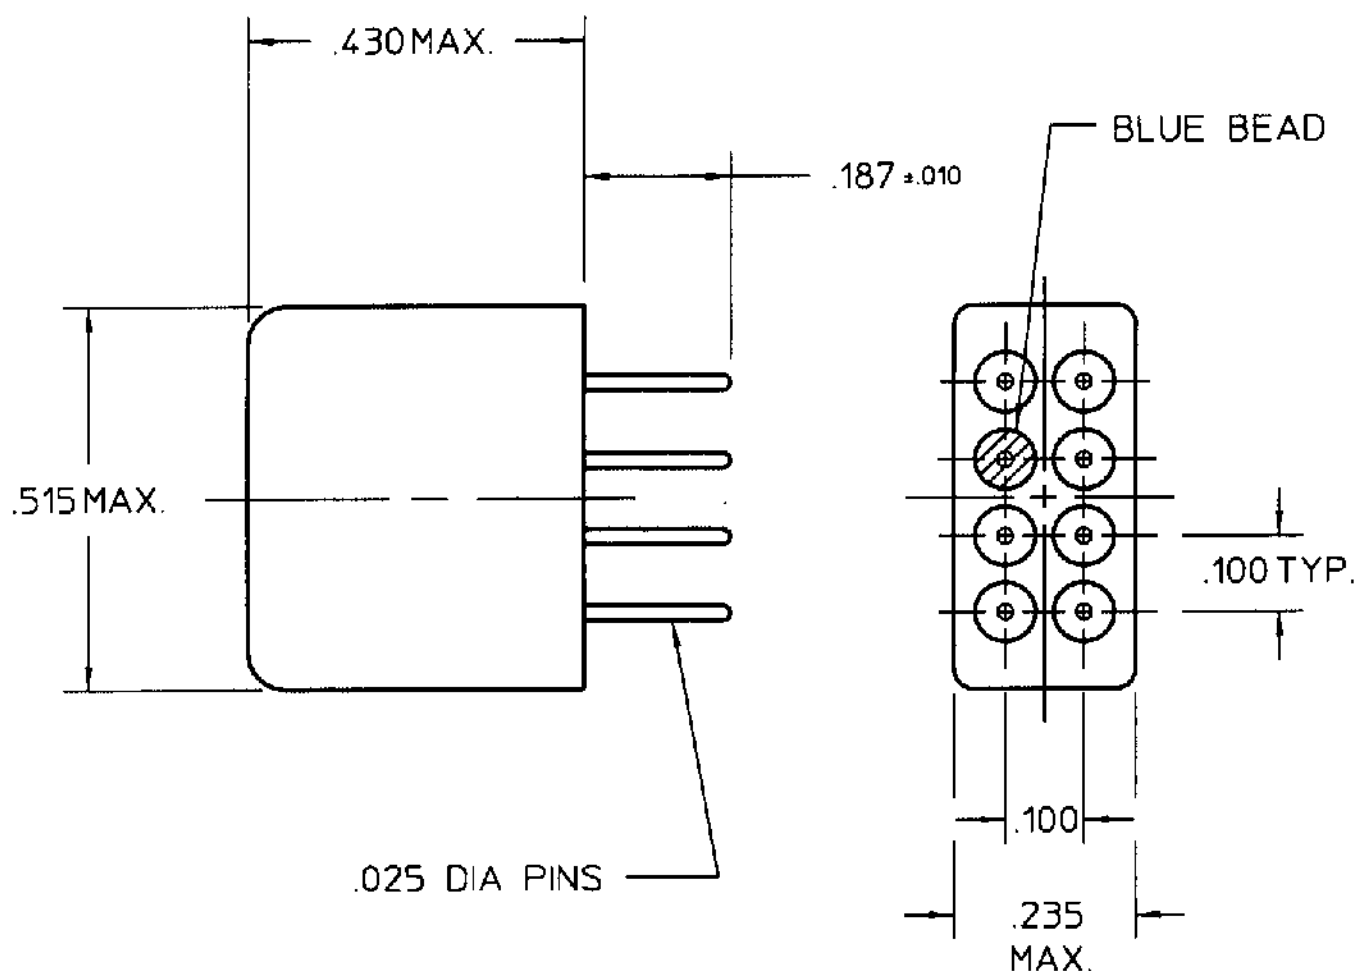

REV. 4 1/10/96

#### COIL:


RESISTANCE 310 OHMS ± 10%  
 NOMINAL VOLTAGE 12.0 VDC  
 MUST OPERATE 6.0 VDC  
 MUST RELEASE 3.0 VDC MAX, 0.6 VDC MIN.

#### ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's  
 SHOCK 100 g's 6 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

#### CUSTOMER DATA SHEET

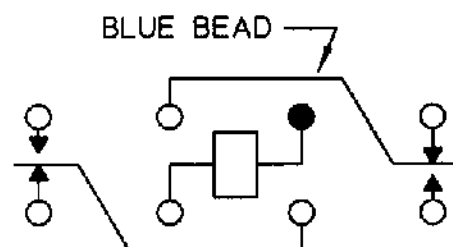

CONTACT RATING: LOW LEVEL TO  
1 AMP 28 VDC RESISTIVE  
100,000 OPERATIONS

DR. R.B. 1/18/91 CK. 1/10/96

**COMMUNICATIONS**  
**INSTRUMENTS, INC.**

CUST. QPL  
 CUST. NO. M39016/34-005

TYPE "MFW" RELAY

**MFW1201S07**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[MFW1201S07](#)