

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

By -

ALL RIGHTS RESERVED

REVISIONS

P	LTR
---	-----

--	--

DESCRIPTION

DATE _____

DWRN	A
------	---

PVD



	C
--	---

REvised PER ECO-16-006303

08AUG201

5	NK	N
---	----	---

MM

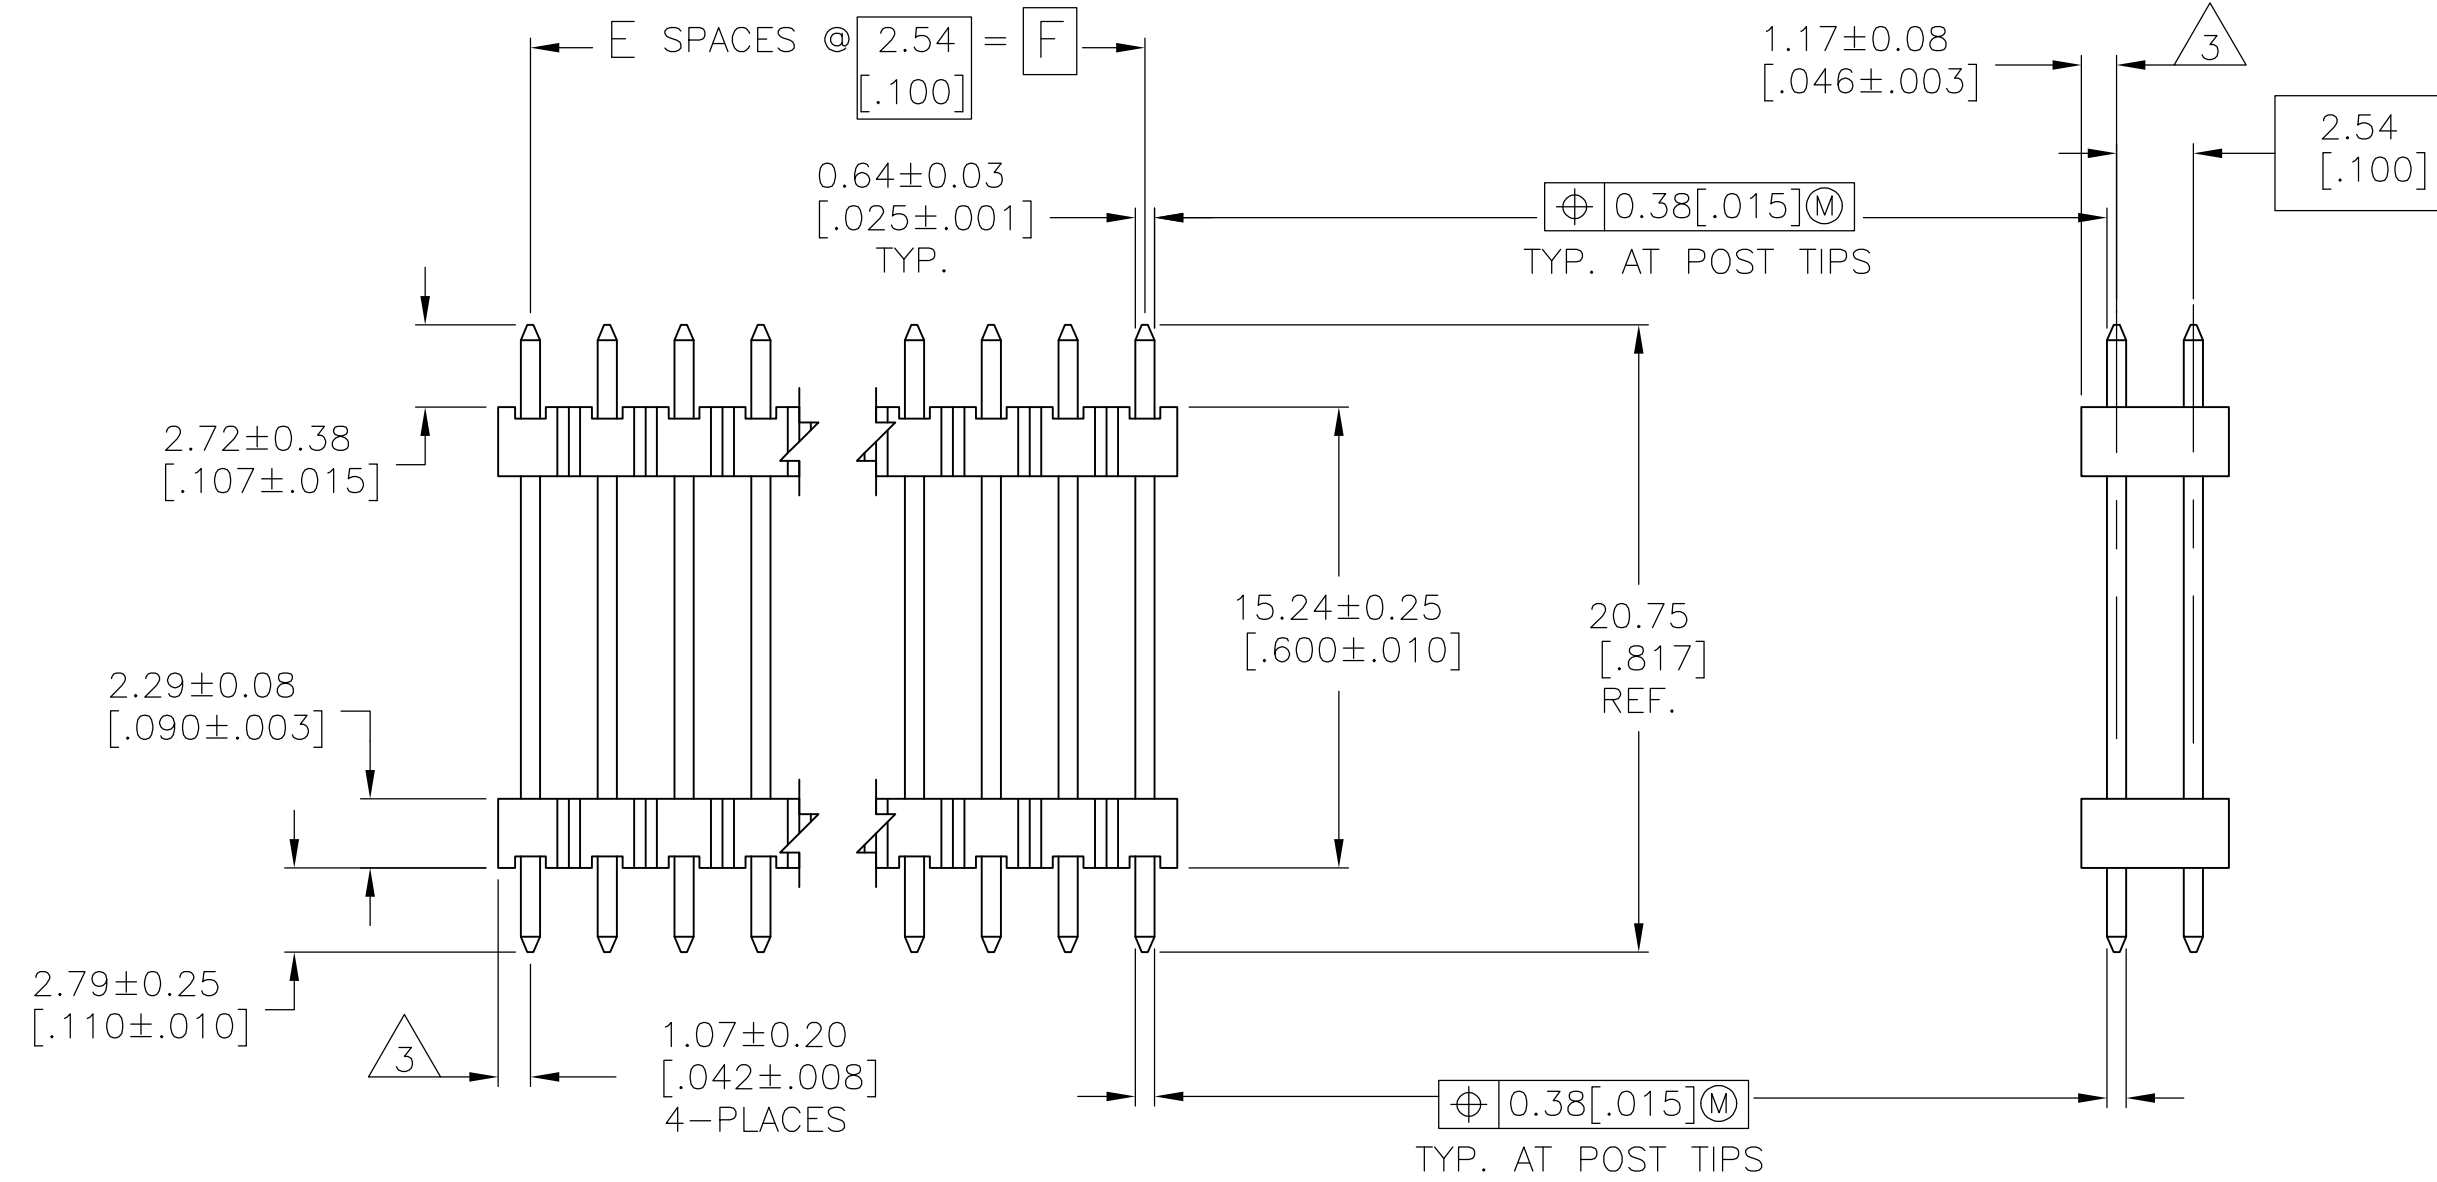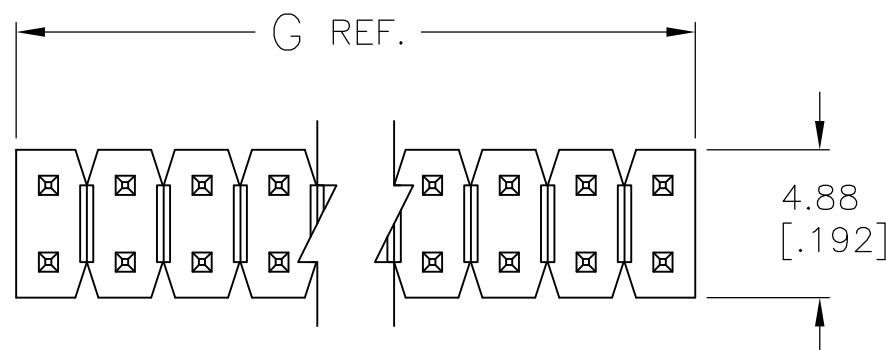

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
CONTACT: COPPER ALLOY
5. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD
OVER 0.00127 [.000050] NICKEL ENTIRE POST.
6. FINISH: 0.00254-0.00508 [.000100-.000200] MATTE TIN
OVER 0.00127 [.000050] NICKEL ENTIRE POST.

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	—9—146491—0—	
		98.65 [3.884]	96.52 [3.800]	38	78	—8—146491—9—	
		96.11 [3.784]	93.98 [3.700]	37	76	—8—146491—8—	
		93.57 [3.684]	91.44 [3.600]	36	74	—8—146491—7—	
		91.03 [3.584]	88.90 [3.500]	35	72	—8—146491—6—	
		88.49 [3.484]	86.36 [3.400]	34	70	—8—146491—5—	
		85.95 [3.384]	83.82 [3.300]	33	68	—8—146491—4—	
		83.41 [3.284]	81.28 [3.200]	32	66	—8—146491—3—	
		80.87 [3.184]	78.74 [3.100]	31	64	—8—146491—2—	
		78.33 [3.084]	76.20 [3.000]	30	62	—8—146491—1—	
		75.79 [2.984]	73.66 [2.900]	29	60	—8—146491—0—	
		73.25 [2.884]	71.12 [2.800]	28	58	—7—146491—9—	
		70.71 [2.784]	68.58 [2.700]	27	56	—7—146491—8—	
		68.17 [2.684]	66.04 [2.600]	26	54	—7—146491—7—	
		65.63 [2.584]	63.50 [2.500]	25	52	—7—146491—6—	
		63.09 [2.484]	60.96 [2.400]	24	50	—7—146491—5—	
		60.55 [2.384]	58.42 [2.300]	23	48	—7—146491—4—	
		58.01 [2.284]	55.88 [2.200]	22	46	—7—146491—3—	
		55.47 [2.184]	53.34 [2.100]	21	44	—7—146491—2—	
		52.93 [2.084]	50.80 [2.000]	20	42	—7—146491—1—	
		50.39 [1.984]	48.26 [1.900]	19	40	—7—146491—0—	
		47.85 [1.884]	45.72 [1.800]	18	38	—6—146491—9—	
		45.31 [1.784]	43.18 [1.700]	17	36	—6—146491—8—	
		42.77 [1.684]	40.64 [1.600]	16	34	—6—146491—7—	
		40.23 [1.584]	38.10 [1.500]	15	32	—6—146491—6—	
	OBSOLETE		37.69 [1.484]	35.56 [1.400]	14	30	6—146491—5—
		35.15 [1.384]	33.02 [1.300]	13	28	—6—146491—4—	
		32.61 [1.284]	30.48 [1.200]	12	26	—6—146491—3—	
		30.07 [1.184]	27.94 [1.100]	11	24	—6—146491—2—	
		27.53 [1.084]	25.40 [1.000]	10	22	—6—146491—1—	
		24.99 [.984]	22.86 [.900]	9	20	—6—146491—0—	
		22.45 [.884]	20.32 [.800]	8	18	—5—146491—9—	
		19.91 [.784]	17.78 [.700]	7	16	—5—146491—8—	
		17.37 [.684]	15.24 [.600]	6	14	—5—146491—7—	
		14.83 [.584]	12.70 [.500]	5	12	—5—146491—6—	
		12.29 [.484]	10.16 [.400]	4	10	—5—146491—5—	
		9.75 [.384]	7.62 [.300]	3	8	—5—146491—4—	
		7.21 [.284]	5.08 [.200]	2	6	—5—146491—3—	
		4.67 [.184]	2.54 [.100]	1	4	—5—146491—2—	
		2.13 [.084]	— —	—	2	—5—146491—1—	
		PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

OBSOLETE		101.19 [3.984]	99.06 [3.900]	39	80	4-146491-0-
		98.65 [3.884]	96.52 [3.800]	38	78	3-146491-9-
		96.11 [3.784]	93.98 [3.700]	37	76	3-146491-8-
		93.57 [3.684]	91.44 [3.600]	36	74	3-146491-7-
		91.03 [3.584]	88.90 [3.500]	35	72	3-146491-6-
		88.49 [3.484]	86.36 [3.400]	34	70	3-146491-5-
		85.95 [3.384]	83.82 [3.300]	33	68	3-146491-4-
		83.41 [3.284]	81.28 [3.200]	32	66	3-146491-3-
		80.87 [3.184]	78.74 [3.100]	31	64	3-146491-2-
		78.33 [3.084]	76.20 [3.000]	30	62	3-146491-1-
		75.79 [2.984]	73.66 [2.900]	29	60	3-146491-0-
		73.25 [2.884]	71.12 [2.800]	28	58	2-146491-9-
		70.71 [2.784]	68.58 [2.700]	27	56	2-146491-8-
		68.17 [2.684]	66.04 [2.600]	26	54	2-146491-7-
		65.63 [2.584]	63.50 [2.500]	25	52	2-146491-6-
		63.09 [2.484]	60.96 [2.400]	24	50	2-146491-5-
		60.55 [2.384]	58.42 [2.300]	23	48	2-146491-4-
		58.01 [2.284]	55.88 [2.200]	22	46	2-146491-3-
		55.47 [2.184]	53.34 [2.100]	21	44	2-146491-2-
		52.93 [2.084]	50.80 [2.000]	20	42	2-146491-1-
		50.39 [1.984]	48.26 [1.900]	19	40	2-146491-0-
		47.85 [1.884]	45.72 [1.800]	18	38	1-146491-9-
		45.31 [1.784]	43.18 [1.700]	17	36	1-146491-8-
		42.77 [1.684]	40.64 [1.600]	16	34	1-146491-7-
		40.23 [1.584]	38.10 [1.500]	15	32	1-146491-6-
		37.69 [1.484]	35.56 [1.400]	14	30	1-146491-5-
		35.15 [1.384]	33.02 [1.300]	13	28	1-146491-4-
		32.61 [1.284]	30.48 [1.200]	12	26	1-146491-3-
		30.07 [1.184]	27.94 [1.100]	11	24	1-146491-2-
		27.53 [1.084]	25.40 [1.000]	10	22	1-146491-1-
		24.99 [.984]	22.86 [.900]	9	20	1-146491-0-
		22.45 [.884]	20.32 [.800]	8	18	146491-9-
		19.91 [.784]	17.78 [.700]	7	16	146491-8-
		17.37 [.684]	15.24 [.600]	6	14	146491-7-
		14.83 [.584]	12.70 [.500]	5	12	146491-6-
		12.29 [.484]	10.16 [.400]	4	10	146491-5-
	9.75 [.384]	7.62 [.300]	3	8	146491-4-	
	7.21 [.284]	5.08 [.200]	2	6	146491-3-	
	4.67 [.184]	2.54 [.100]	1	4	146491-2-	
	2.13 [.084]	- -	-	2	146491-1-	
	PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN	11/8/9
T. HOFFMAN	

CHK	11/22/9
-----	---------

G. DUBNICZKI

G. DUBNICZKI

PRODUCT SPEC	
--------------	--

[illegible]

APPLICATION SPEC



TE Connectivity

HEADER ASSEMBLY, MOD II,
STACKING, DOUBLE ROW,
025 SQ. POST, UNSHROUDED

SIZE	CAGE CODE	DRAWING NO
A1	00779	C-14

RESTRICTED TO

SCALE	1" = 1'	SHEET	1	OF	1	REV	0
-------	---------	-------	---	----	---	-----	---

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146491-9](#)