


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVO
AD	39		H2	REVISED PER ECO-11-004587	11MAR11	RK	HMR

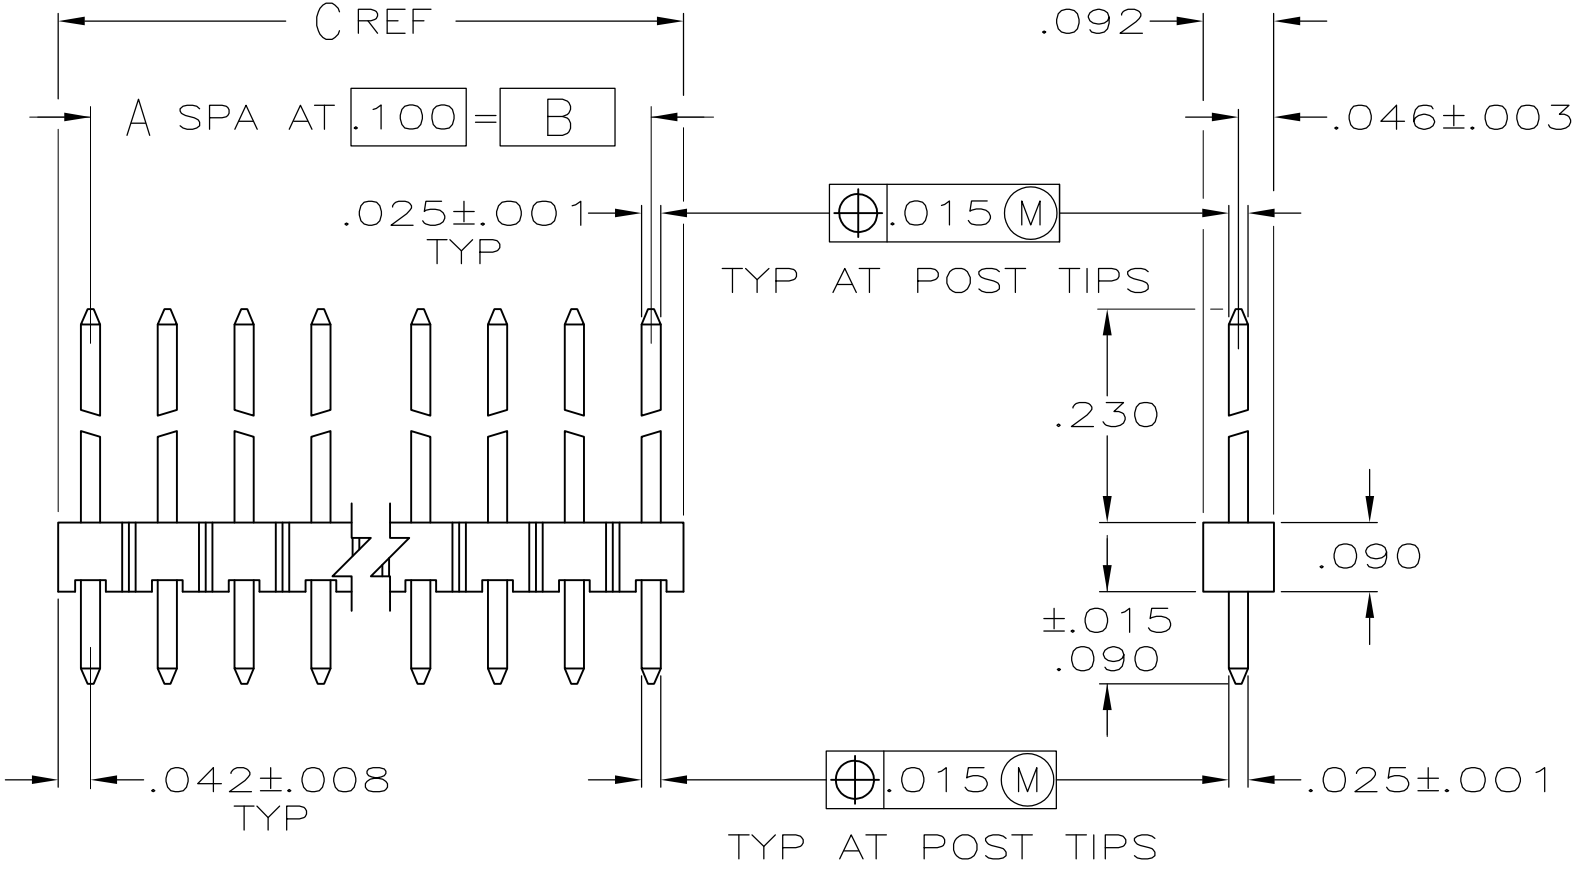

- 1 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3


.000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL ENTIRE POST
- 4

.000100-.000200 BRIGHT TIN OVER .000050 NICKEL ENTIRE POST
- 5

PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
- 6

HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR BLACK.
- 7

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

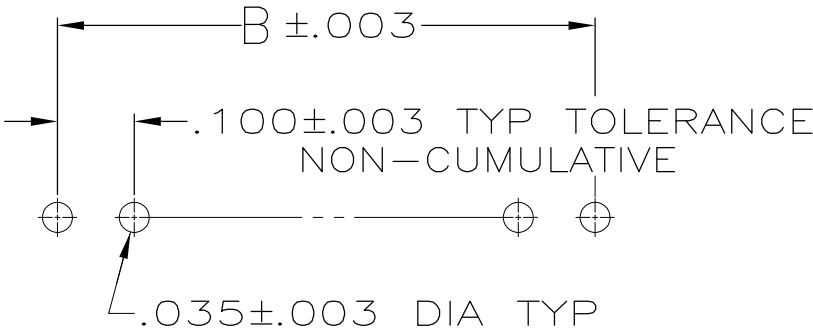

RECOMMENDED HOLE LAYOUT

		9					
	OBSOLETE	4	1.584	1.500	15	4-103741-2	
		4	1.384	1.300	13	4-103741-1	
		3	3.984	3.900	39	4-103741-0	
	OBSOLETE	3	3.884	3.800	38	3-103741-9	
	7	3	3.784	3.700	37	3-103741-8	
7	SUPERSEDED BY 8-146282-7	3	3.684	3.600	36	3-103741-7	
	OBSOLETE	3	3.584	3.500	35	3-103741-6	
		3	3.484	3.400	34	3-103741-5	
		3	3.284	3.300	33	3-103741-4	
		3	3.284	3.200	32	3-103741-3	
		3	3.184	3.100	31	3-103741-2	
		3	3.084	3.000	30	3-103741-1	
		3	2.984	2.900	29	3-103741-0	
		3	2.884	2.800	28	2-103741-9	
		3	2.784	2.700	27	2-103741-8	
		3	2.684	2.600	26	2-103741-7	
		3	2.584	2.500	25	2-103741-6	
		3	2.484	2.400	24	2-103741-5	
		3	2.384	2.300	23	2-103741-4	
		3	2.284	2.200	22	2-103741-3	
		3	2.184	2.100	21	2-103741-2	
		3	2.084	2.000	20	2-103741-1	
		3	1.984	1.900	19	2-103741-0	
		3	1.884	1.800	18	1-103741-9	
		3	1.784	1.700	17	1-103741-8	
		3	1.684	1.600	16	1-103741-7	
		3	1.584	1.500	15	1-103741-6	
		3	1.484	1.400	14	1-103741-5	
		3	1.384	1.300	13	1-103741-4	
		3	1.284	1.200	12	1-103741-3	
		3	1.184	1.100	11	1-103741-2	
		3	1.084	1.000	10	1-103741-1	
		3	.984	.900	9	1-103741-0	
		3	.884	.800	8	103741-9	
		3	.784	.700	7	103741-8	
		3	.684	.600	6	103741-7	
		3	.584	.500	5	103741-6	
		3	.484	.400	4	103741-5	
		3	.384	.300	3	103741-4	
		3	.284	.200	2	103741-3	
		3	.184	.100	1	103741-2	
		3	.084	—	—	1	103741-1
		PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L. RINGLEY	7-19-85	 TE Connectivity				
DIMENSIONS: INCHES			CHK R. ELICKER	7-19-85					
			APVD R. ELICKER	7-19-85	NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQ. POSTS				
			TOLERANCES UNLESS OTHERWISE SPECIFIED:						
			PRODUCT SPEC						
			APPLICATION SPEC						
			—		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL			FINISH		WEIGHT	A200779C-103741			—
PHOSPHOR BRONZE			SEE TABLE		CUSTOMER DRAWING				SCALE
									4:1
									SHEET
									1 of 1
									REV
									H2

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[103741-5](#)