
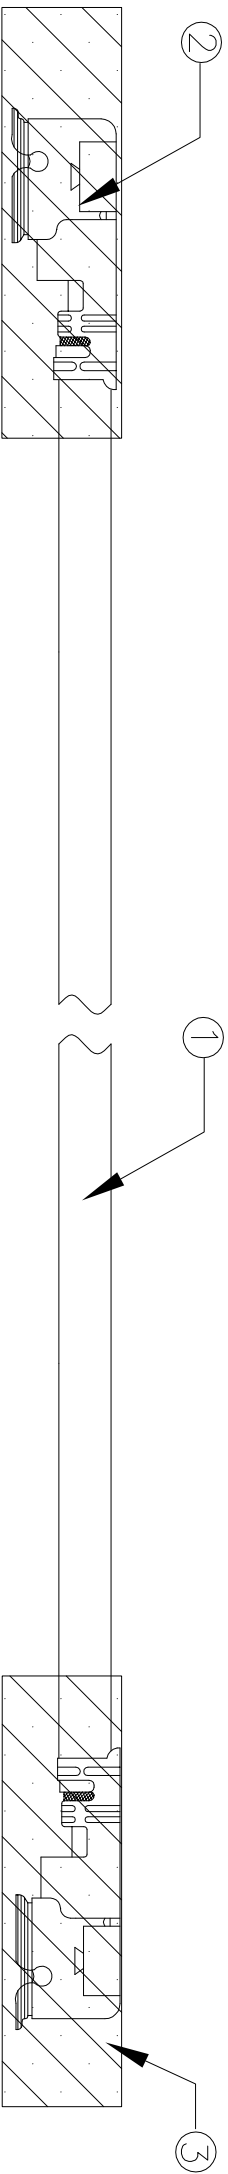


LOC		DIST		REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		NEW RELEASE	12FEB09	CP	LZ

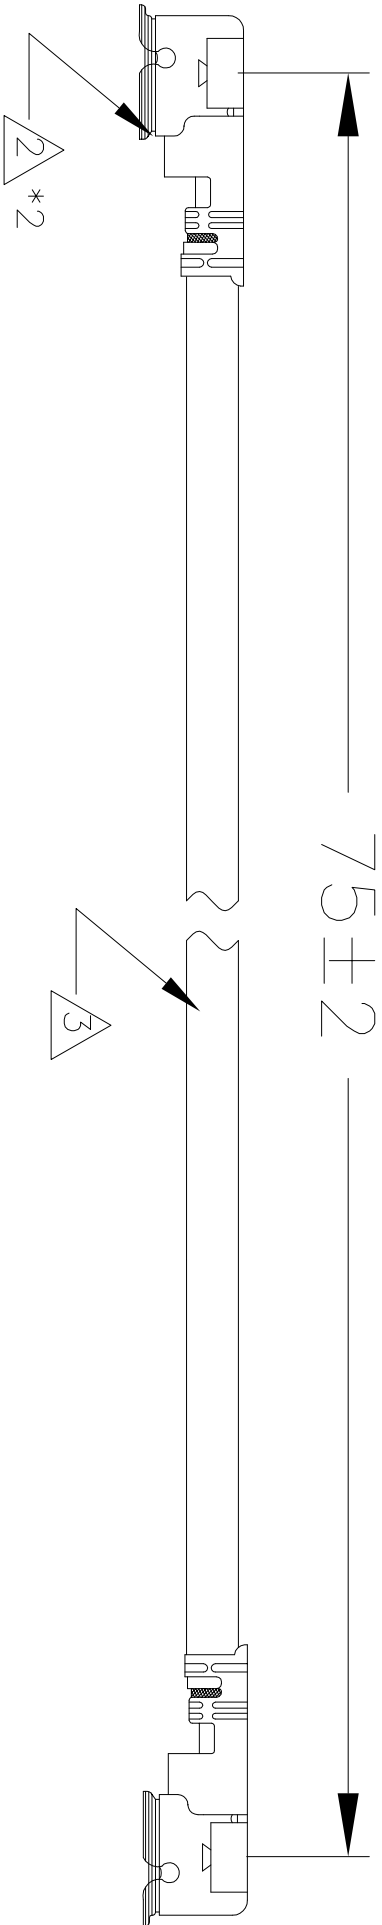

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS,SHORTS AND CONTINUITY


HI-POT: 200 VDC FOR 100MS
INSULATION RESISTANCE: 50M OHMS MIN
CONTINUITY RESISTANCE: 2 OHMS MAX
FREQUENCY RANGE: DC TO 6 GHZ
VSWR: 1.5:1 MAX

- CONNECTOR: TYPE III U.FL
- SUPPLIER:I-PEX 20278-112R-13
- CABLE: 1.13MM OD, JACKET RED, 50 OHMS FEP INSULATED
- SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
- TWO END U.FL CONNECTORS IN THE SAME POSITION
- PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF

TYCO ELECTRONICS STANDARD 230-702

		30	MM	PROTECT TUBING FOR I-PEX 20278	3
		2	PC	I-PEX 20278-112R-13 CONNECTOR	2
		75	MM	COAXIAL CABLE,RED COLOR, OD 1.13MM	1
		-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	12FEB09	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK	12FEB09		
		Andrew Dong			
		APVD	12FEB09	NAME	
		Lucky Zhang		FWT3 Ericsson UMTS/Aux cable assembly red,75mm,0degree	
		PRODUCT SPEC			
		—			
		APPLICATION SPEC			
		—			
		WEIGHT	—		
		A3		00779	G=1513279
		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		—			
MATERIAL		FINISH			
—		—			

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm [INCHES]			
0 PLC		± -	
1 PLC		± -	
2 PLC		± -	
3 PLC		± -	
4 PLC		± -	
ANGLES		± -	
			

CUSTOMER DRAWING		SCALE	SHEET	REV
		N.T.S.	1 of 1	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1513279-1](#)