



APS2718S-T-R Piezo Speaker

3541 Stop Eight Road • Dayton, Ohio 45414

Product Overview


- 27.3 x 24.8 mm speaker built using a piezo ceramic for minimum current draw
- Designed to work with signals as high as 20Vp-p
- Only 0.8 mm thick for slim devices that need high output
- Double-sided tape for peel-and-stick mounting

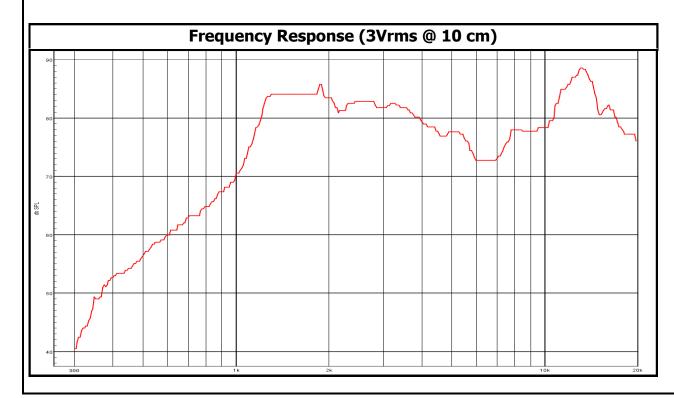

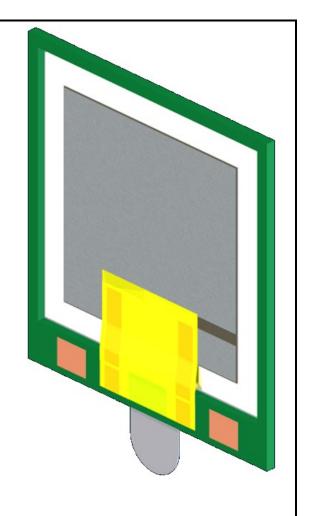






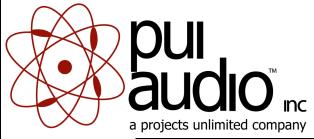

APS2718S-T-R Piezo Speaker

Mechanical and Environment Testing				
Test Description	Test Condition			
High Temperature	85°C with random humidity for 240 hours			
Low Temperature	-30°C with random humidity for 240 hours			
Humidity	60°C with 90% to 95% relative humidity for 240 hours			
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours			
Drop Test	150 cm free fall while in 150g jig, 3 cycles per side			
Temperature Cycle Test	-30°C for 30 minutes to 85°C for 30 minutes, 20 cycles			

After 4 hours at rest, resonant frequency shall be $\pm 10\%$ of original value with capacitance $\pm 20\%$ of original value.

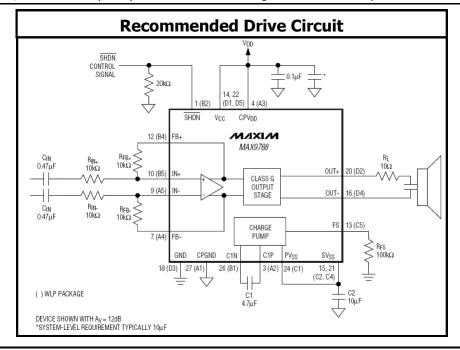


SPECIFICATIONS				
PARAMETERS	VALUES	UNIT		
RATED INPUT VOLTAGE	3	Vrms		
MAX INPUT VOLTAGE	20	Vp-p		
MINIMUM OUTPUT SPL @ 3Vrms/10CM	75	dBA		
(AT 1.0, 1.5, 2.0, 3.0 kHz)	75			
RESONANT FREQUENCY	1,800 ± 20%	Hz		
FREQUENCY RANGE	300 ~ 20,000	Hz		
HOUSING MATERIAL	STAINLESS			
HOUSING WATERIAL	STEEL	_		
OPERATING TEMPERATURE	-20 ~ +70	°C		
WEIGHT	1.3	grams		


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

0		REVISION HISTORY					
	LTR	DESCRIPTION	DATE	APPROVED			
٠ [-	RELEASED FROM ENGINEERING	2/9/2010				
	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	5/25/2010	B.R.			
	В	REVISED MAX INPUT VOLTAGE	6/1/2011	B.R.			
	С	REVISED SPL MEASURED AT POINTS (kHz)	1/20/2012	B.R.			
	D	REVISED OPERATING TEMPERATURE	9/26/2016	M.V.			

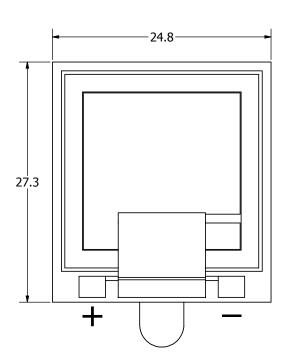

DOUBLE-SIDED TAPE

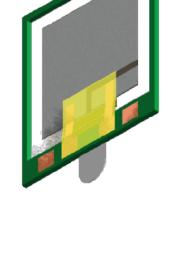

NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE		Designed by	Date
SPECIFIED: DIMENSIONS ARE IN	SIZE	B.R.	2/9/2010
MILLIMETERS,		∞	6 1.11
TOLERANCES ARE ±0.5 AND	A3		Pul

PUI audio nc a projects unlimited company

Checked by

C.W.

Date

2/9/2010 B.R. 2/9/2010 5/25/2010 APS2718S-T-R

Approved by

Speaker Edition Sheet

Date

Drawn Date

4

APS2718S-T-R.idw