


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT PART NUMBER | MAXIMUM BUNDLE DIAMETER | PACKAGE QUANTITY | LENGTH = L ± .3 [7] |
|---------------------|-------------------------|------------------|-----------------------|
| MLT2LH-LP316 | 2.0" [51] | 50 | 7.9" [201] |
| MLT4LH-LP316 | 4.0" [102] | 50 | 14.3" [362] |
| MLT6LH-LP316 | 6.0" [152] | 50 | 20.5" [521] |
| MLT8LH-LP316 | 8.0" [203] | 50 | 26.8" [679] |

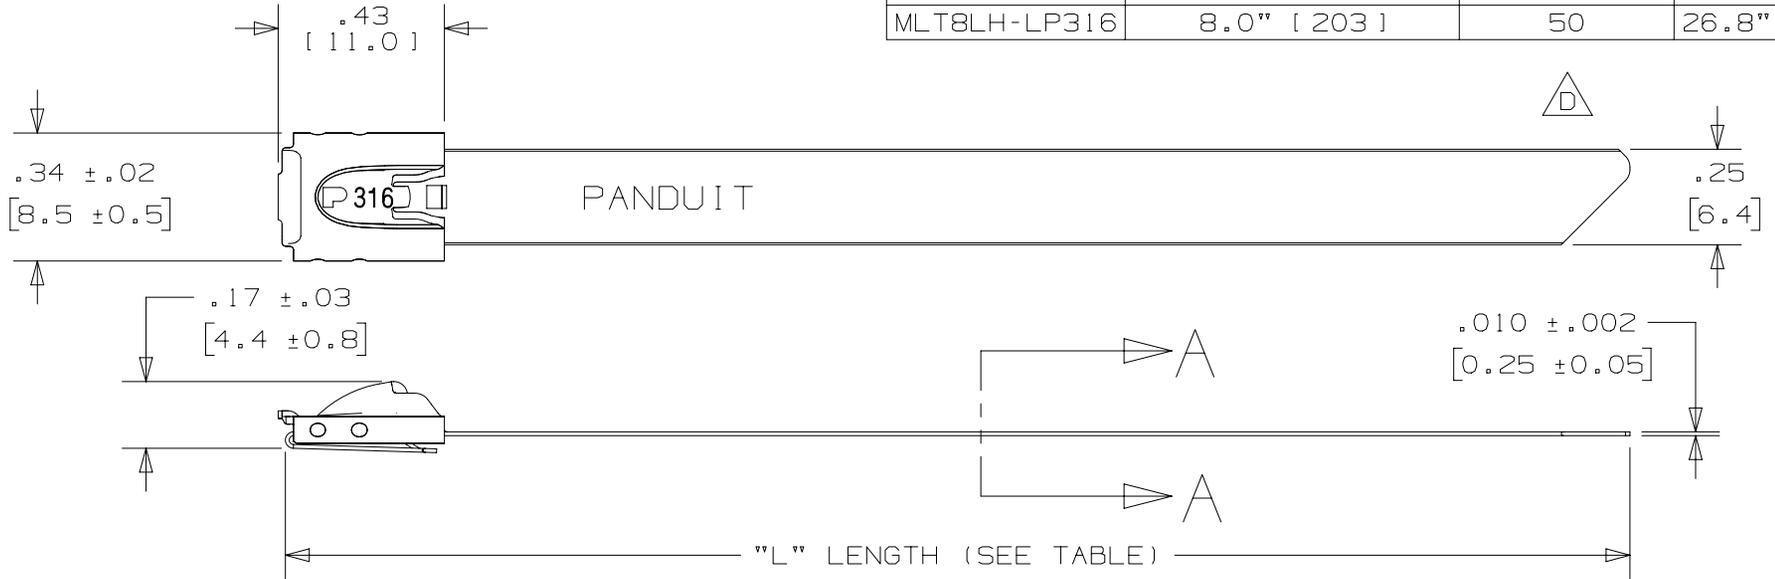

- NOTES:
1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
 2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS (1112 NEWTONS) WHEN TESTED ON A 1 1/2" MANDREL.
 3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
 4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°

FULLY ROUNDED EDGES ALONG STRAP BODY

SECTION A - A
SCALE: 8x

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN | TITLE | MATERIAL: | DRAWING NUMBER: |
|-----|----------|-----|-----|------|--------------------------------|-------------|---|----------------------------|--------------------|
| | | | | | | | METAL LOCKING TIE LIGHT-HEAVY SERIES 316 STAINLESS STEEL | 316 STAINLESS STEEL | N41127BS_DC |
| | | | | | | | CUSTOMER DRAWING | | |
| | | | | | | | ITEM REVISION NAME N41127BS/05 | PANDUIT | |
| | | | | | | | DATASET FILE NAME N41127BS/05 | | |
| | | | | | | | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 ° | | |
| 05 | 10.01.15 | BDK | SKB | RGRO | D. ADDED NEW TIP CONFIGURATION | N41127BS_DS | THIRD ANGLE PROJECTION | | |
| | | | | | | | DRAWN BY JAMB | SCALE 2:1 | SHT 1 OF 1 |
| | | | | | | | DATE 6/03 | CHK DPN | SIZE A |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MLT2LH-LP316](#) [MLT4LH-LP316](#) [MLT6LH-LP316](#) [MLT8LH-LP316](#)