


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0783950001](#)
Status: **Active**
Overview: [Micro Serial Attached SCSI Connectors \(Micro SAS\)](#)
Description: 0.80mm, 1.27mm Micro SAS 6G Receptacle, Right-Angle, Surface Mount, 0.76µm Gold (Au) Plating, 25 Circuits, for 1.00mm PCB Thickness, Halogen free, Lead-Free

Documents:
[3D Model](#) [Product Specification PS-78395-001-001 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification	
CSA	LR19980
UL	E29179
General	
Product Family	I/O Connectors
Series	78395
Application	Board-to-Board
Component Type	Receptacle
Electrical Model	Yes
Overview	Micro Serial Attached SCSI Connectors (Micro SAS)
Product Name	Micro SAS 6G
Type	N/A
UPC	883906495442
Physical	
Boot Color	N/A
Circuits (Loaded)	25
Circuits (maximum)	25
Circuits Detail	Signal 14, Power 9, Sideband 2
Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Gender	Female
Keying to Mating Part	Yes
Lock to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	1.844/g
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	1.00mm
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	0.80mm, 1.27mm
Pitch - Termination Interface	0.80mm, 1.27mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	0° to +55°C
Termination Interface: Style	Surface Mount

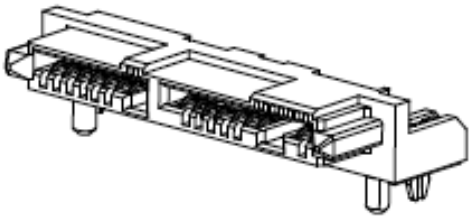

Series image - Reference only

EU ELV Not Relevant	
EU RoHS Compliant REACH SVHC Not Contained Per - ED/71/2019 (16 July 2019) Halogen-Free Status Low-Halogen For more information, please visit Contact US	China RoHS China ROHS ELV RoHS Phthalates
	Green Image Not Relevant Not Contained

Search Parts in this Series
[78395](#) Series

Mates With
[78394](#) , [78528](#) Micro SAS Plugs

Waterproof / Dustproof	No
Wire Size AWG	N/A
Electrical	
Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	30V
Solder Process Data	
Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	260
Material Info	
Reference - Drawing Numbers	
Electrical Model Document	EE-78395-001
Product Specification	PS-78395-001-001
Sales Drawing	SD-78395-001

This document was generated on 09/18/2019

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

78395-0001