

4





3

2

1

If this document is printed it becomes uncontrolled.
Check for the latest revision.

REVISIONS			
ZONE	LTR	DESCRIPTION	DATE
	B	REVISED PER ECN T-19964	3/29/85
	C	REVISED PER DCR# T-22294	7/17/90
			APPROVED
			HAGMANN
			M.HIGGY

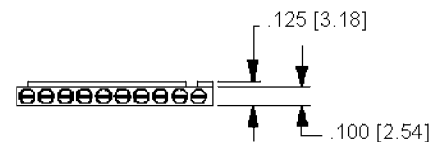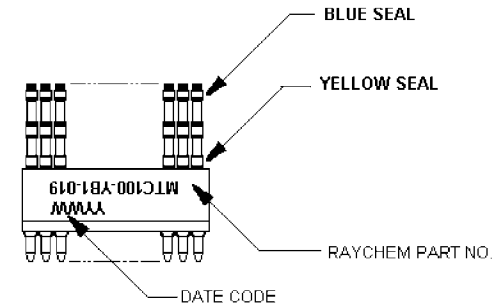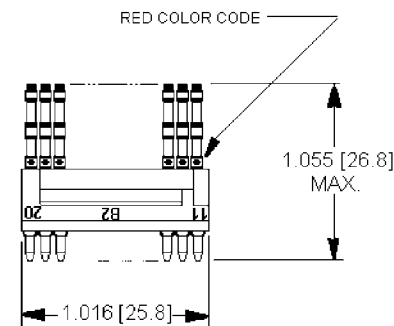

NOTES:

1. MATERIAL: 1 - A. WAFER; INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC.
1 - B. CONTACT: COPPER ALLOY PER QQ-B-613.
1 - C. INTERFACIAL SEAL; SILICONE ELASTOMER PER ZZ-R-765.
1 - D. SOLDER SLEEVES; REFER TO CTA-0068.
2. FINISH: 2 - A. WAFER; FINISH TO BE AS MOLDED.
2 - B. CONTACT; ENGAGING END, GOLD PLATED PER MIL-G-45204, CLASS 1 TERMINATION END, SOLDER COATED PER QQ-S-571.
3. SPECIAL NOTES 3 - A. THIS WAFER INSERT IS QUALIFIED TO **Raychem** SPECIFICATION C-6111.
4. THIS INSERT IS INTENDED FOR USE WITH THE MTC100 2" CONNECTOR HOUSING.

TABLE 1

SPECIAL TEST REQUIREMENTS	
EXAMINATION OR TEST	REQUIREMENT
VISUAL AND DIMENSIONAL EXAMINATION	PER SCD
INSULATION RESISTANCE AT AMBIENT TEMPERATURE	5000 MEGOHMS MINIMUM
DIELECTRIC WITHSTAND VOLTAGE AT SEA LEVEL	1500 VAC (RMS) 60 HZ

DO NOT SCALE THIS DRAWING

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE XXX = +/- .005 (0.13 MM) XX = +/- .02 (0.51 MM)	DRAWN	LOVATO	7-29-92	Raychem RAYCHEM CORPORATION 300 CONSTITUTION DR. MENLO PARK, CALIFORNIA 94025			
	CHECKED			TITLE WAFER, PIN, "B2" 4-WAY, 125 C, 20-26 AWG OVAL ENTRY FOR MTC100 CONNECTORS			
	APPROVED						
	MATERIAL NOTES	APPROVED			SIZE A CODE IDENT 06090 DWG NO MTC100-YB1-019 C		
APPROVED							
FINISH NOTES	CAD NAME	T22294.PCX		SCALE WEIGHT 2.12 G. MAX SHEET 1 OF 1			
	PCN	107472-000					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[107472-000](#)