

D

D

C



C

B

B

A

A

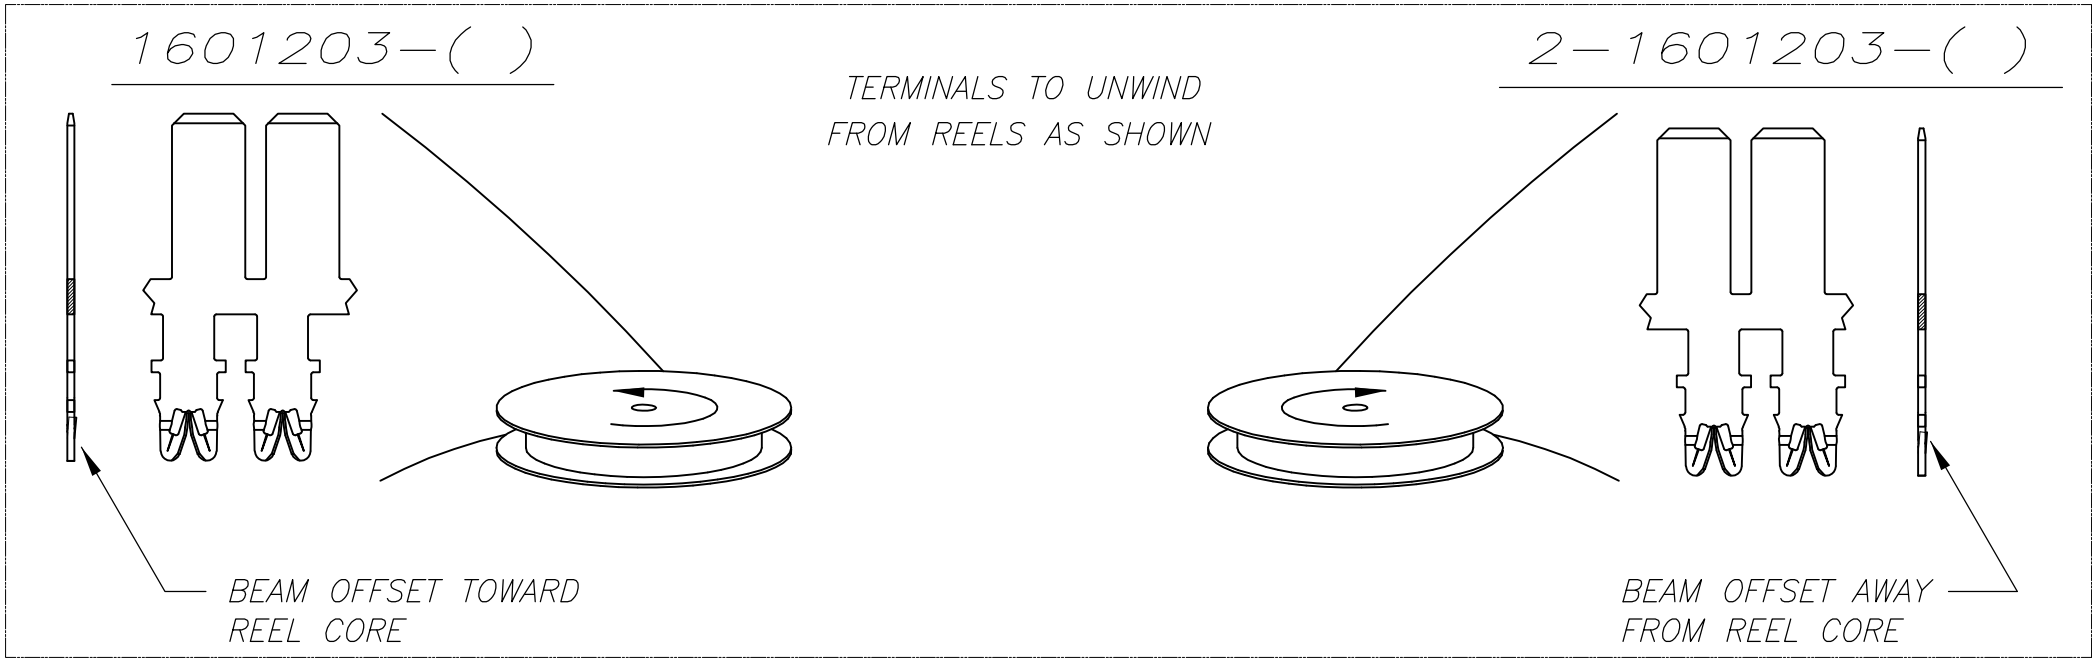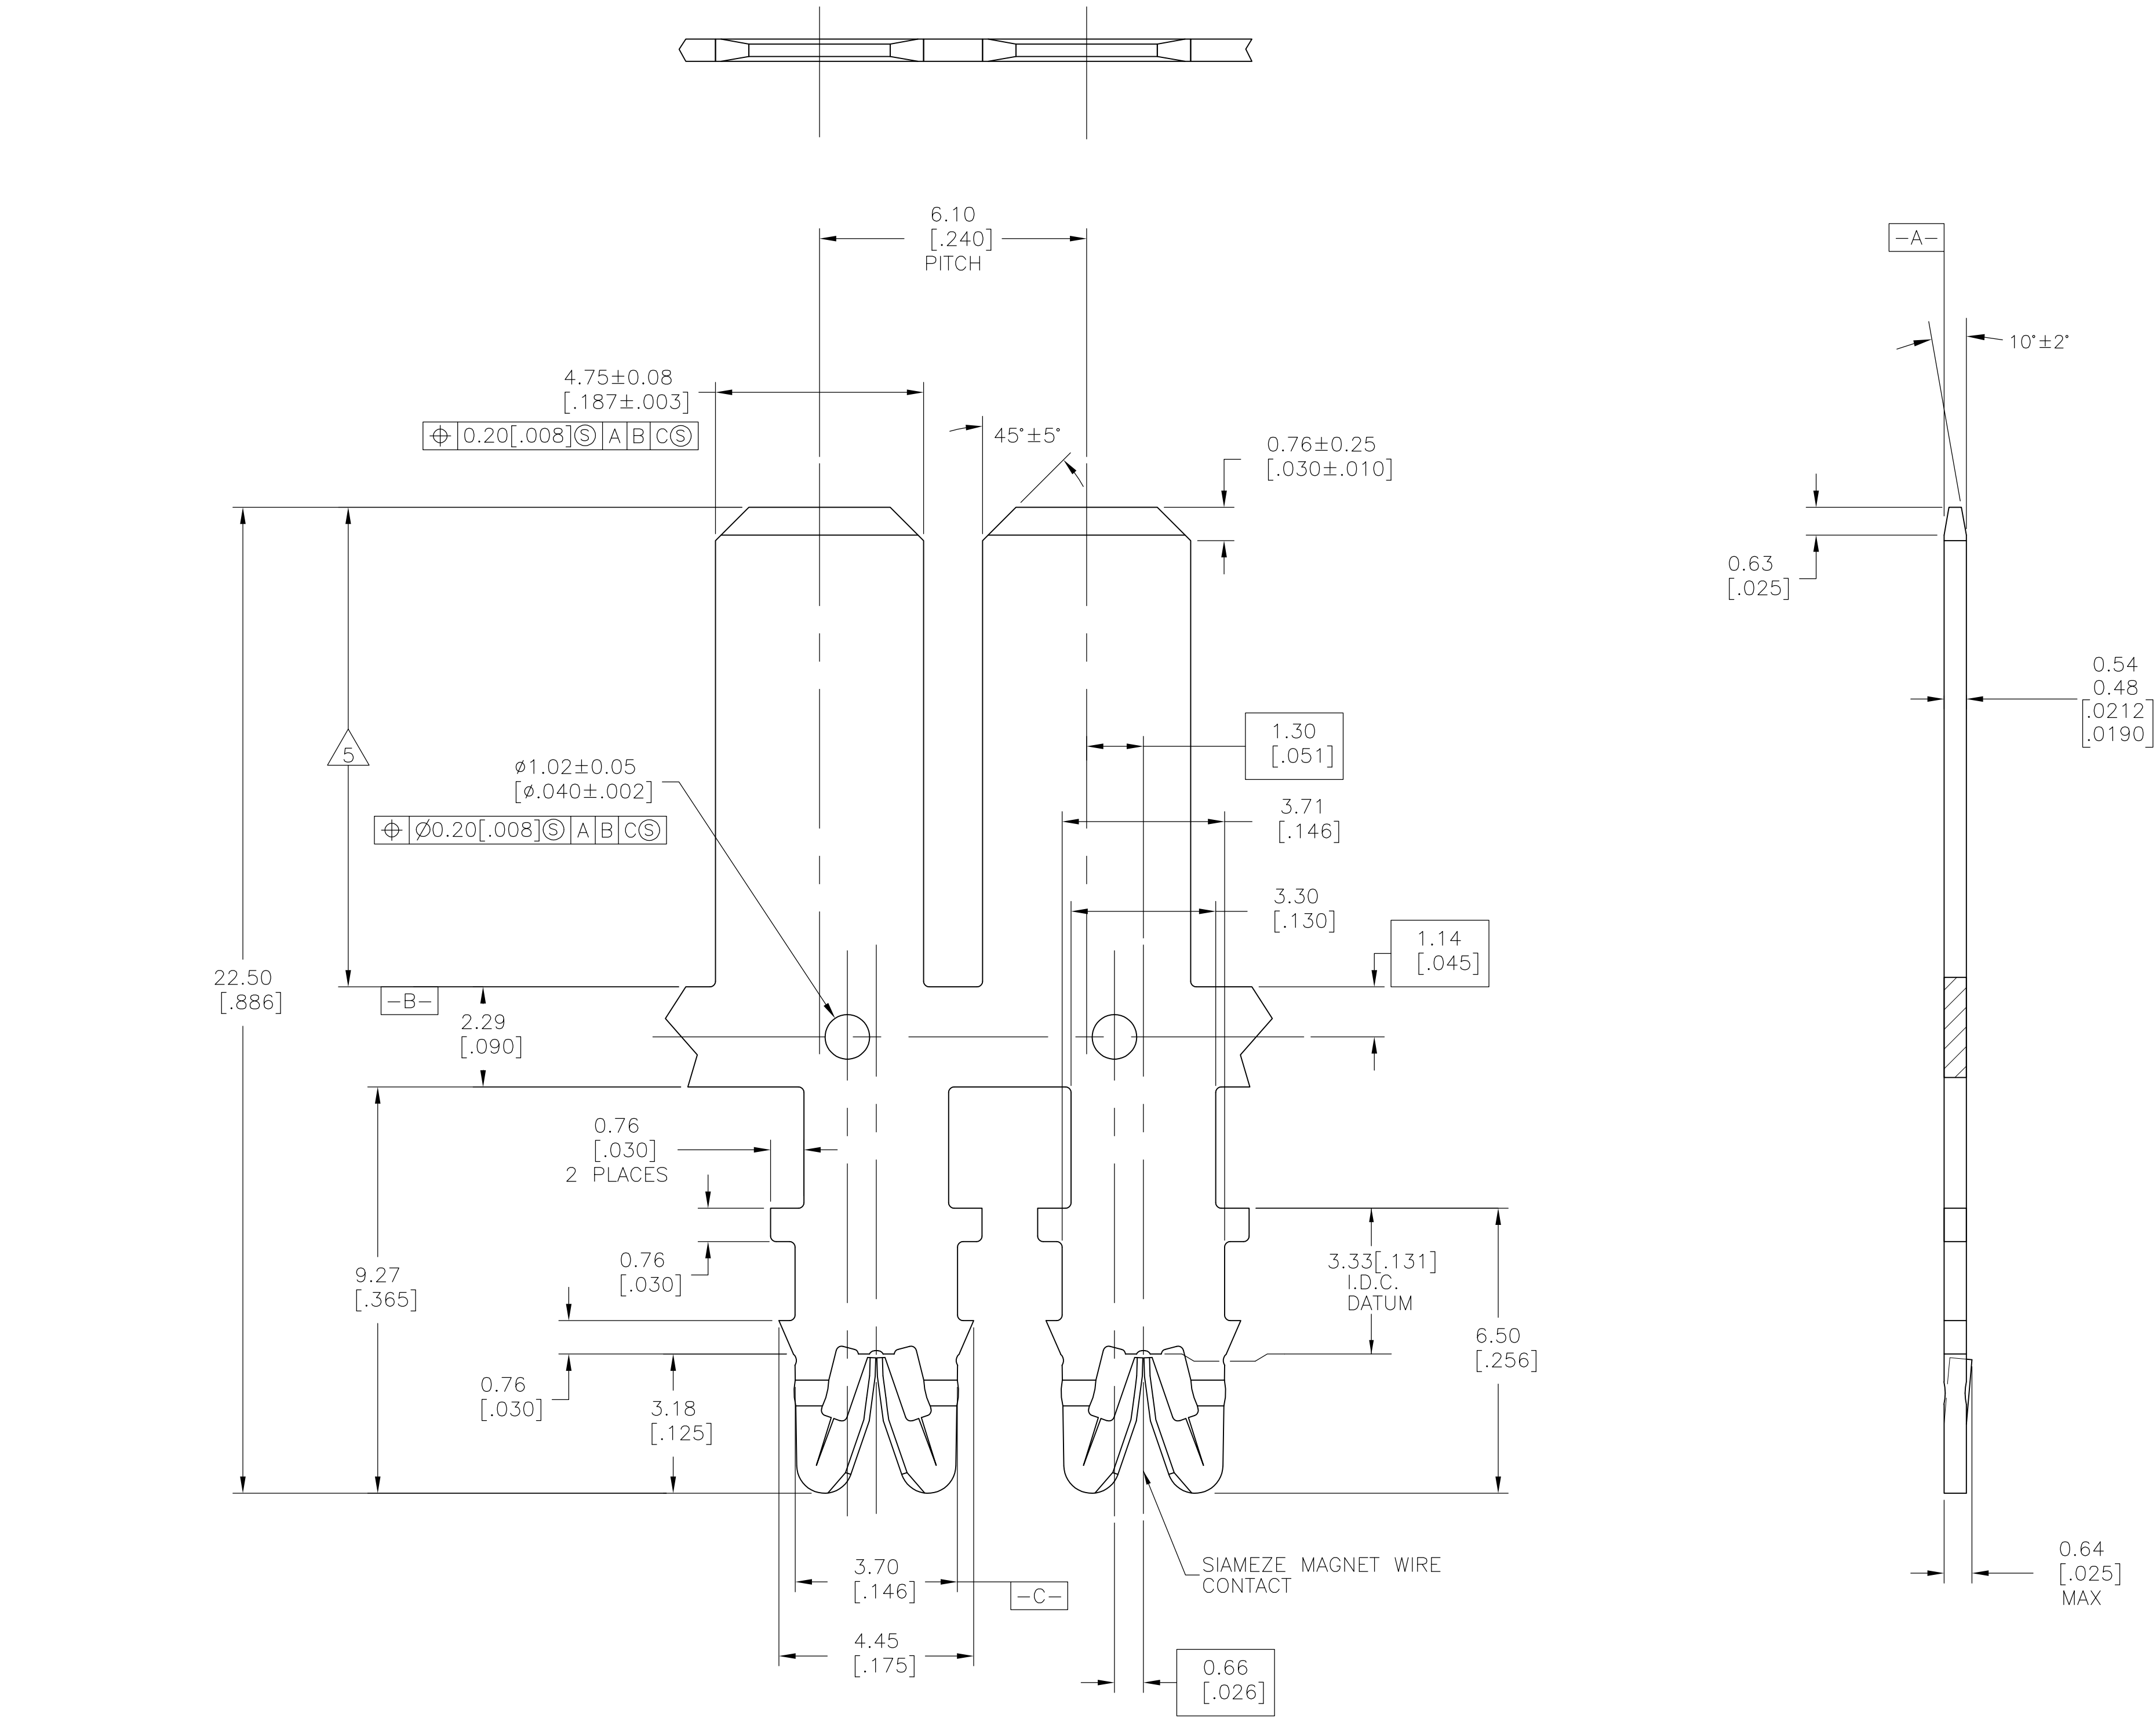

- SPECIFICATION: WIRE RANGE; #18-#34 AWG. 0.16-1.02 DIA [.006-.040] mm. COPPER MAGNET WIRE.
- POCKET RECOMMENDATION: 1601424.
- TERMINAL APPLICATION TO COMPLY WITH TYCO ELECTRONICS SPECIFICATION 114-13166. CONSULT PRODUCT ENGINEERING FOR PROPER INSERTION DEPTH.
- POST PLATED 2 - 3.8 MICRONS TIN OVER 2.5 MICRONS MIN COPPER.
- THIS LENGTH IS SELECTIVELY POST PLATED WITH 2-3.8 MICRONS SILVER OVER 1.25 MICRONS MIN NICKEL. SILVER MAY EXTEND ONTO CARRIER. BALANCE OF TERMINAL IS MICKEL PLATED ONLY.
- PRELIMINARY - NOT FOR PRODUCTION.

5	2-1601203-3
4	2-1601203-2
4	6 1601203-2
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M.S. FEHER 05OCT2004	TE Connectivity	
		CHK G. JACONO 05OCT2004		
DIMENSIONS: mm [INCHES]		APVD G. JACONO 05OCT2004	NAME	
		PRODUCT SPEC	STANDARD RANGE WIRE TO .187 [4.75] X .020 [0.51], OFFSET TAB SIAMEZE TERMINAL	
		APPLICATION SPEC		
MATERIAL FULL HARD BRASS		FINISH SEE TABLE	SIZE A1	RESTRICTED TO -
		WEIGHT 0.000000	CAGE CODE 00779	REV A3
		CUSTOMER DRAWING		SCALE 11:1
		SHEET 1 OF 1		REV A3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1601203-2](#)