


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



ALL RIGHTS RESERVED.

© COPYRIGHT - By -


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		K	REVISED PER ECO-12-000090	30JAN2012	CJV	SLB

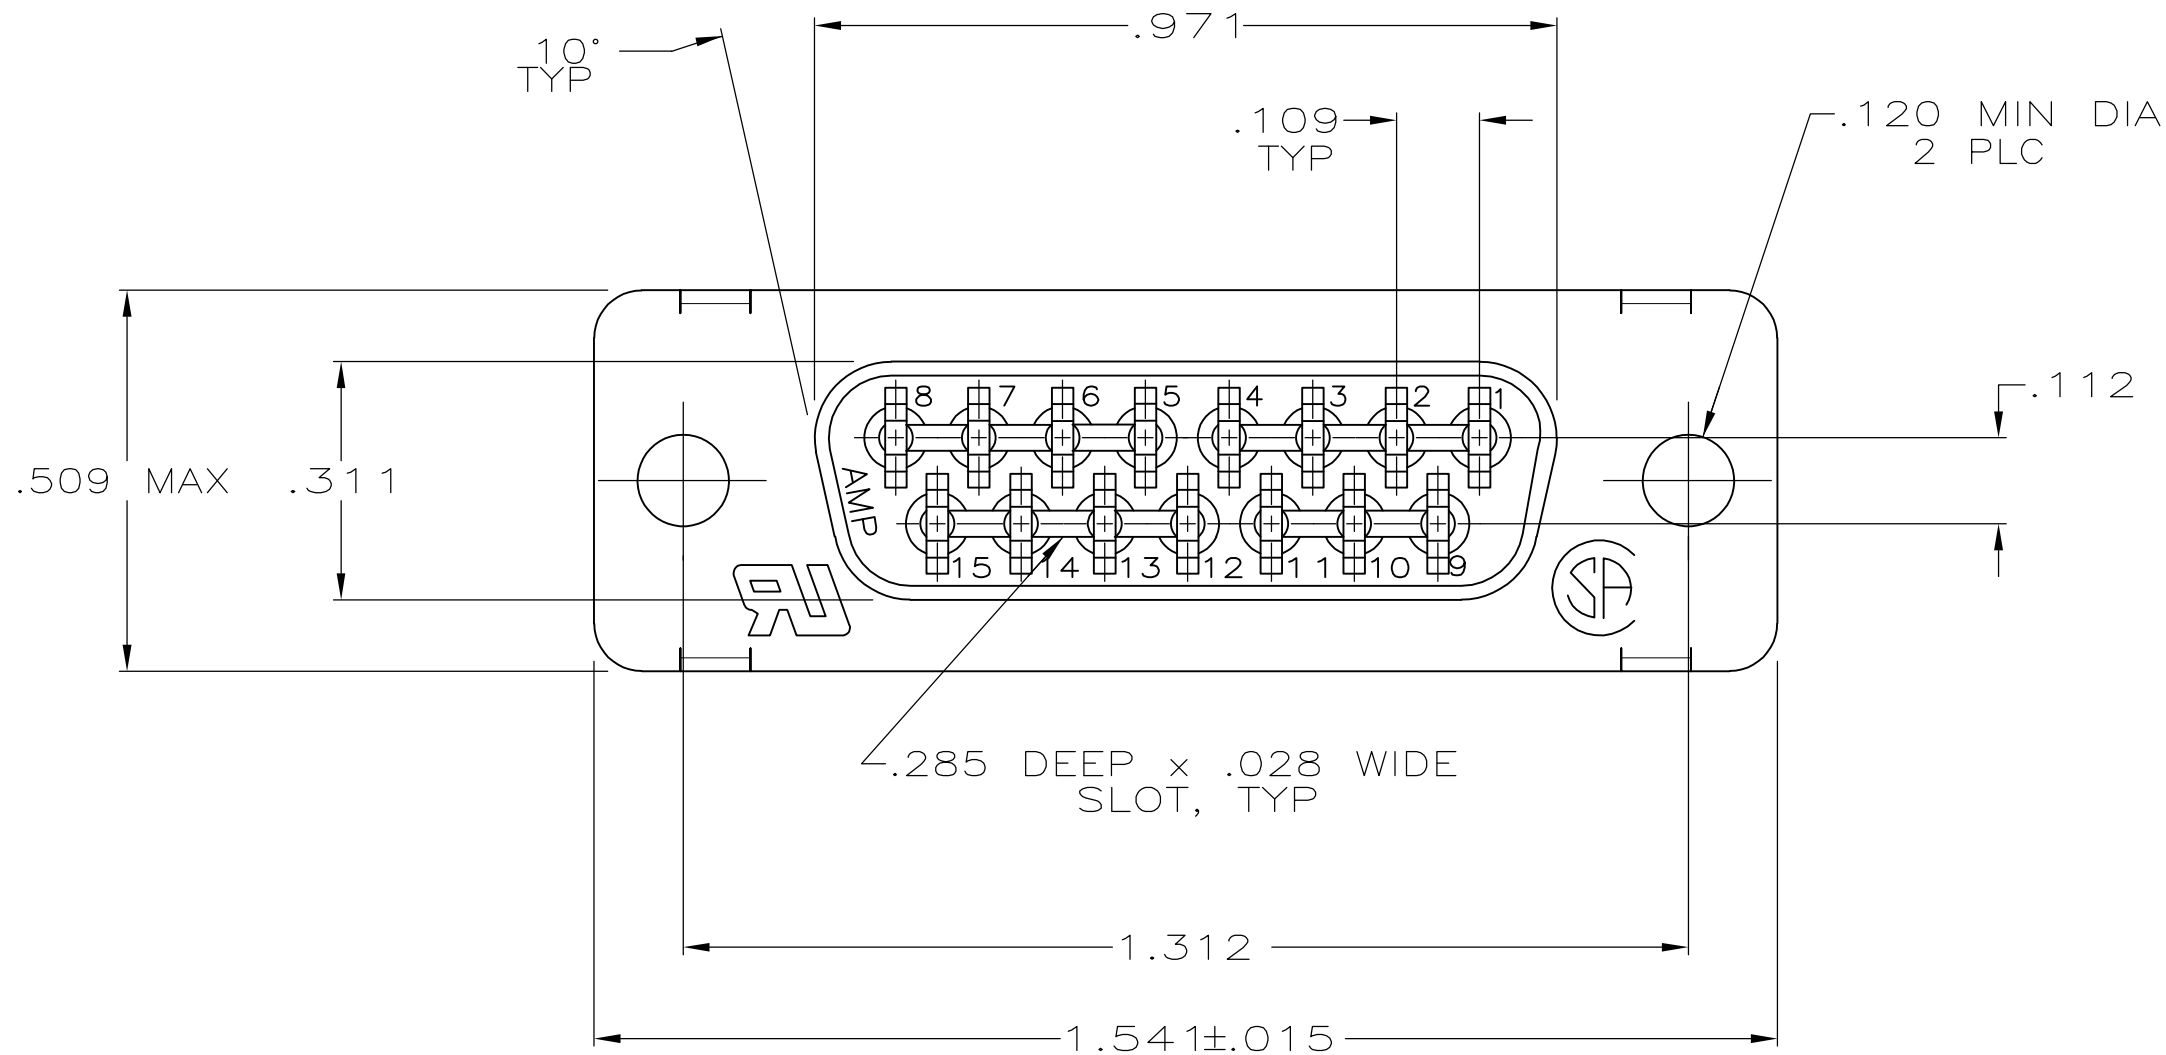

- 1 FOR USE WITH .093 MINIMUM THICK PRINTED CIRCUIT BOARD. REFER TO APPLICATION SPECIFICATION FOR PRINTED CIRCUIT BOARD LAYOUT DIMENSIONS AND FINISH RECOMMENDATIONS.
- 2 DUPLEX PLATED: GOLD FLASH ON MATING SURFACE, BRIGHT TIN OR BRIGHT TIN LEAD ON COMPLIANT PIN, ALL OVER NICKEL.
- 3 .000030 MIN GOLD IN MATING AREA.
.000100 MIN TIN OR TIN-LEAD ON COMPLIANT PIN.
ALL OVER .000050 MIN NICKEL.
OR
GOLD FLASH OVER PALLADIUM NICKEL.
.000030 MIN TOTAL IN MATING AREA.
.000100 MIN TIN OR TIN-LEAD ON COMPLIANT PIN.
ALL OVER .000050 MIN NICKEL.
- 4 PLATED .0002-.0004 BRIGHT TIN

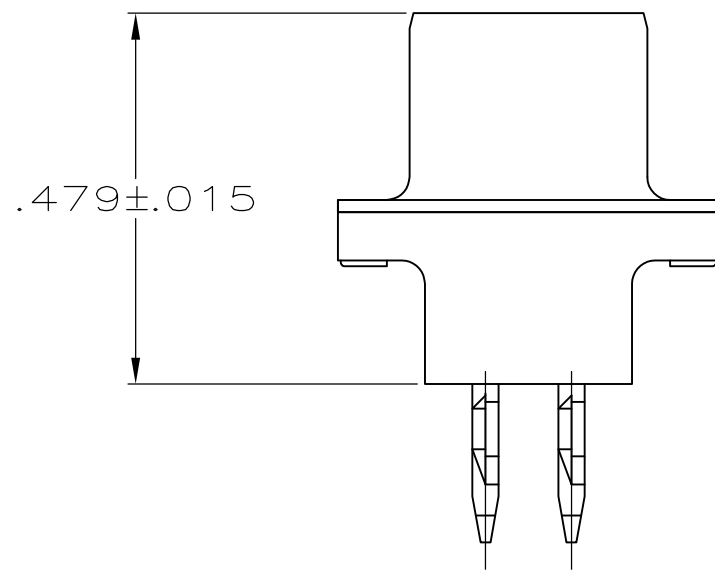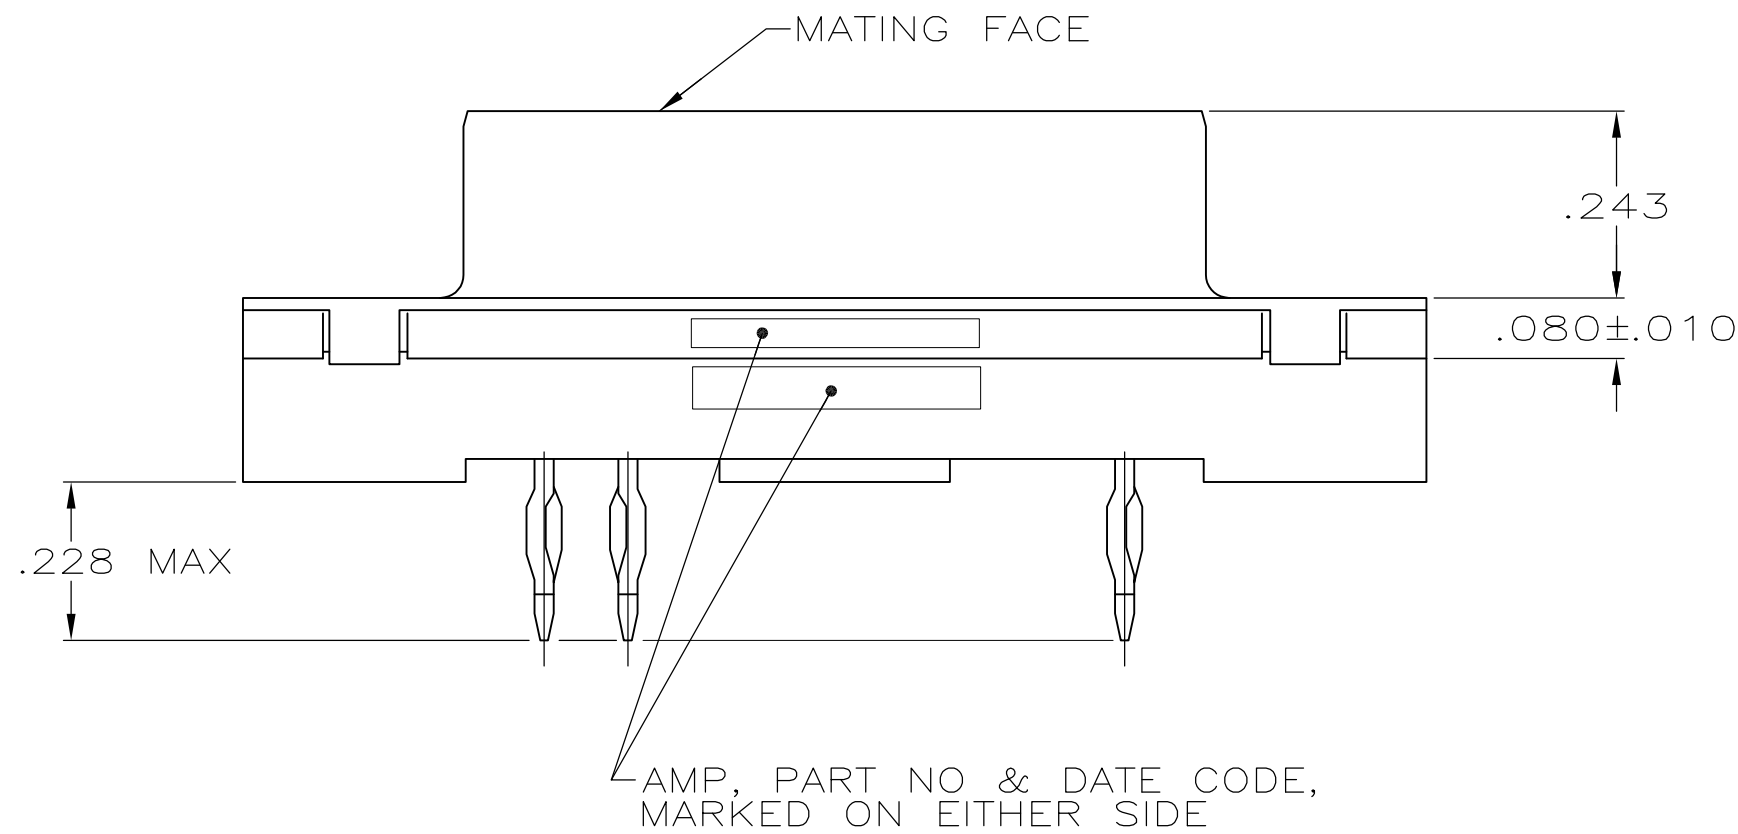

SUPSD BY 747140-2	3	747140-2
	2	747140-1
	CONTACT FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN D.HARDY 03-31-94	 TE Connectivity					
		CHK R.STONE 04-26-94						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M.PERCHERKE 04-26-94	NAME					
	0 PLC ± -	PRODUCT SPEC	RCPT ASSY, SIZE 2, 15 POSN, AMPLIMITE™ W/ ACTION PIN, HDP, MDM PROFILE, CONTACTS & METAL SHELL					
	1 PLC ± -	108-40014						
	2 PLC ± -	APPLICATION SPEC						
	3 PLC ± .005	114-40026 1						
4 PLC ± -	ANGLES ± .2°	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-747140	RESTRICTED TO -		
MATERIAL	FINISH	CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV K
HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, COLOR BLACK CONTACTS: COPPER ALLOY SHELL: CARBON STEEL		CONTACTS: SEE TABLE						
SHELL: 								

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[747140-2](#)