

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16		K	OBSOLETED: -3 PER ECR 05-008388	01MAY03	JRB	LLV

- 14

BRIGHT TIN PER ASTM-B-545, 2.54
- 15

FERRULE CRIMP TOOLING: POWER UNIT 189721-1 (HAND ACTUATED) OR 189722-1 (FOOT ACTUATED). TOOL HOLDER 356302-1 (RATCHETED) OR 189767-1 (NON-RATCHETED). ADAPTOR 679304-1 WITH DIE SET 58651-1.
- 16

CRIMP TOOLING: AMP-O-LECTRIC 565435-5 WITH APPLICATOR 466689-2 (PAD LTR B)
- 17

CRIMP TOOLING: AMP-O-LECTRIC 565435-5 WITH APPLICATOR 466689-2 (PAD LTR C)
- 18

OBSOLETED PART.

- 1

BRASS PER QQ-B-626.
- 2

ZINC DIE CAST PER ASTM B 86.
- 3

BRASS PER ASTM-B-36 OR COPPER PER ASTM-B-188.
- 4

POLYMETHYLPENTENE GENERAL PURPOSE.
- 5

NICKEL PER QQ-N-290, 1.27μm [.000050] MIN THICK.
- 6

TIN PLATE PER MIL-T-10727B; TYPE 2, 2.54μm [.000100] MIN THICK.
- 7

CRIMP TOOLING: AMP-O-LECTRIC 565435-5 WITH APPLICATOR 466689-2. (PAD LTR A)
- 8

CRIMP TOOLING: AMP-O-LECTRIC 565435-5 WITH APPLICATOR 567386-2.
- 9



STAMPED & FORMED CONTACT, P/N 414942-1, ORDERED SEPARATELY.
- 10

STAMPED & FORMED CONTACT, P/N 414942-2, ORDERED SEPARATELY.
- 11

FERRULE CRIMP TOOLING: POWER UNIT 189721-1 (HAND ACTUATED) OR 189722-1 (FOOT ACTUATED). TOOL HOLDER 356302-1 (RATCHETED) OR 189767-1 (NON-RATCHETED). ADAPTOR 679304-1 WITH DIE SET 220189-1.
- 12

FERRULE CRIMP TOOLING: POWER UNIT 189721-1 (HAND ACTUATED) OR 189722-1 (FOOT ACTUATED). TOOL HOLDER 356302-1 (RATCHETED) OR 189767-1 (NON-RATCHETED). ADAPTOR 679304-1 WITH DIE SET 318450-2.
- 13

DIMENSION APPLIES AFTER CONNECTOR IS CRIMPED TO CABLE.

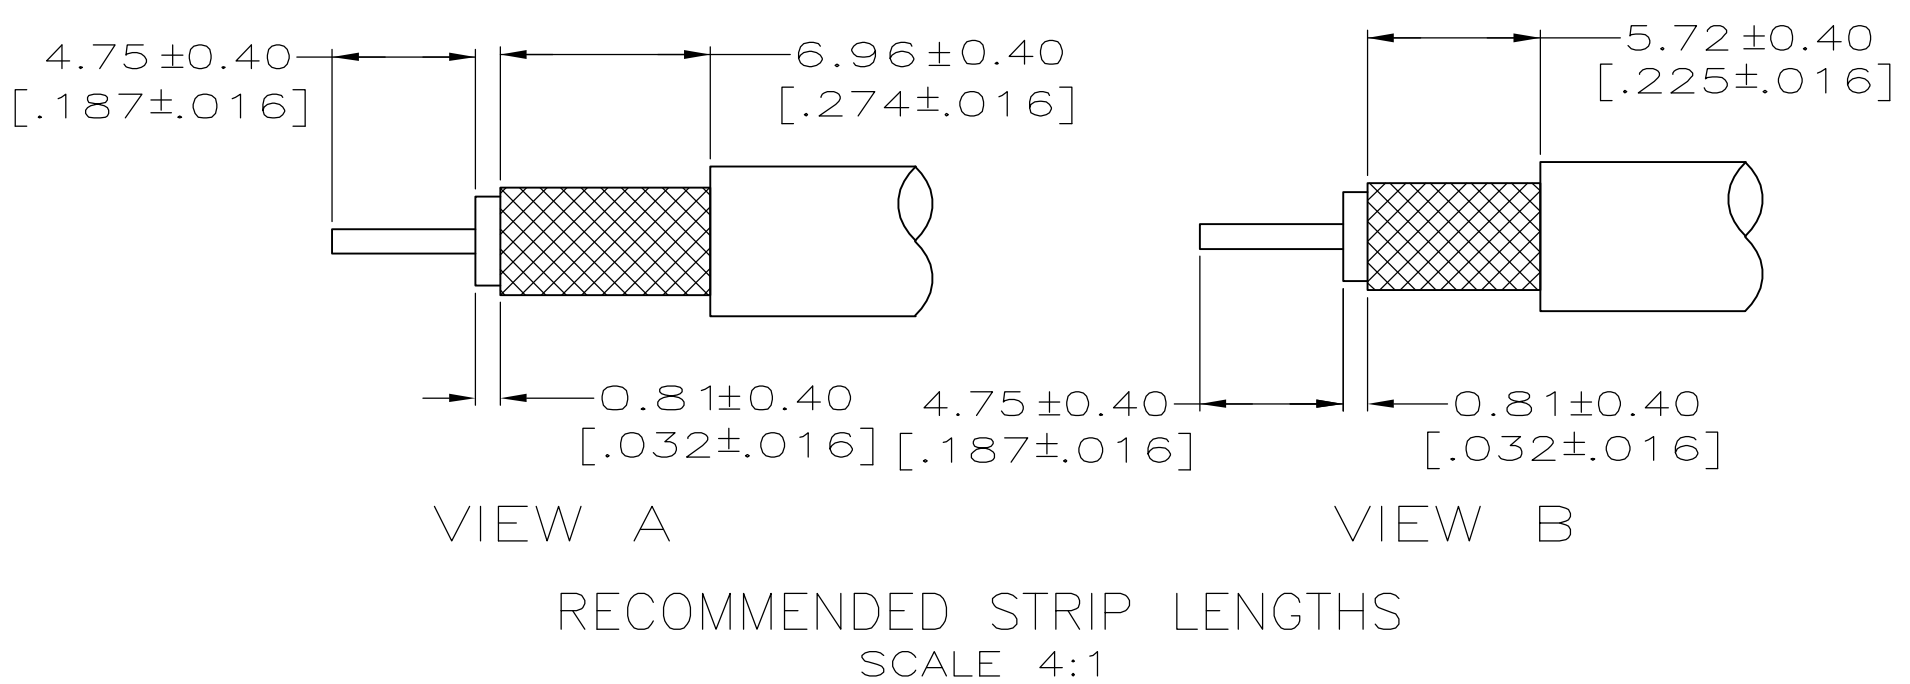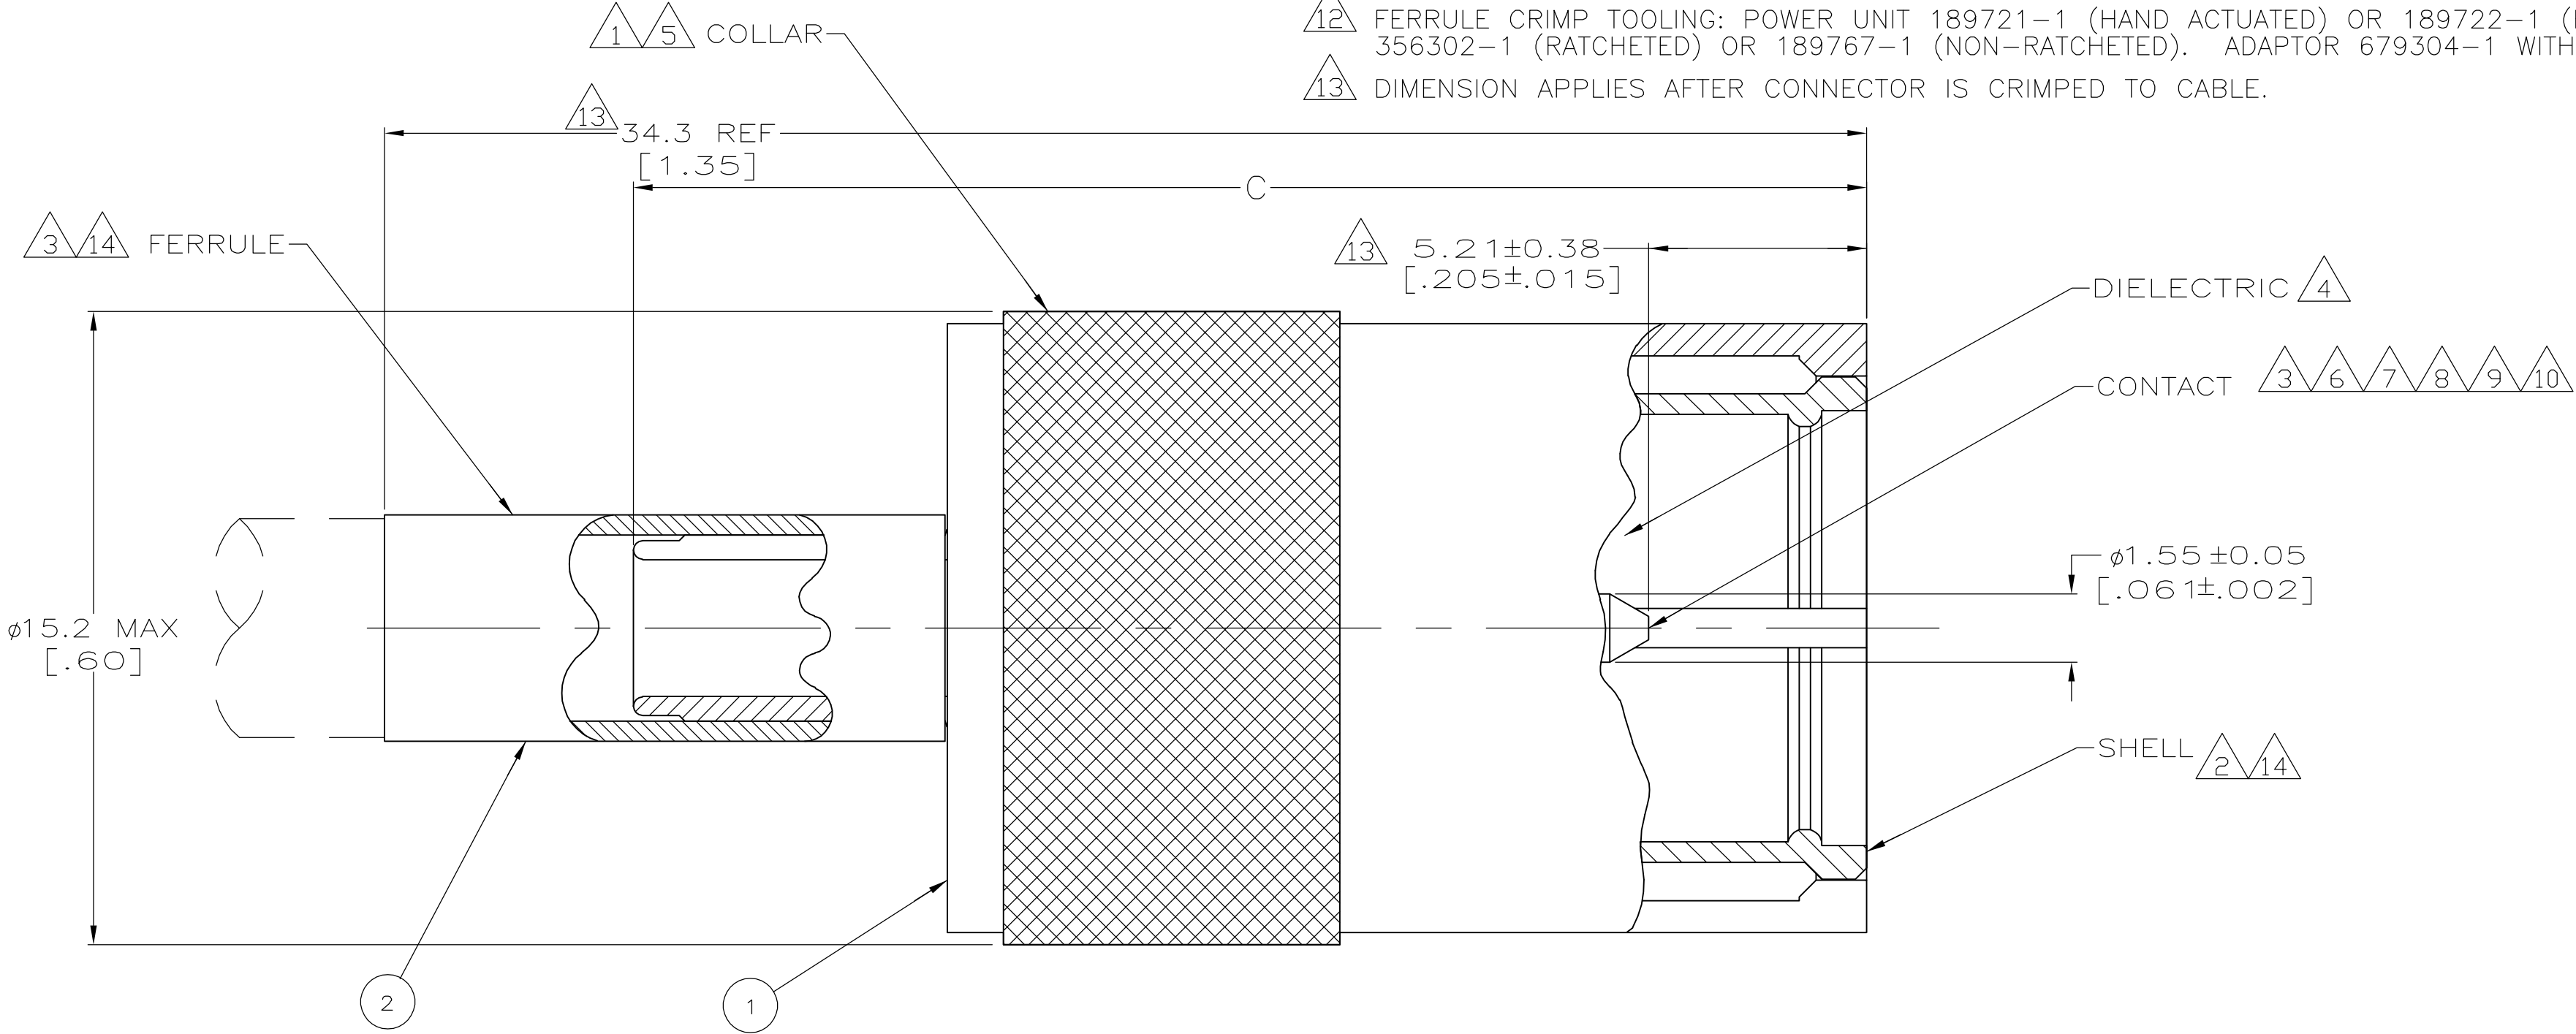

18 17 15 9 16 15 9 12 10 8 11 9 7	27.94[1.100]	A	21 AWG SOLID 22 AWG STRANDED	-887079-3	1326385-1	415011-3
	26.01[1.024]	B	RG-174/U	9-328666-0	1326385-2	415011-2
	27.94[1.100]	A	RG-58/U	9-221132-0	1326385-1	415011-1
	C	VIEW	2 CABLE SIZE	1 FERRULE QTY=1	PLUG ASSY QTY=1	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. MARTINELLI 25AUG93	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608		
DIMENSIONS: INCHES			CHK BILL MOYER 11NOV94			
			APVD -	NAME MINI-UHF, SNAP-LOCK KIT CABLE PLUG, CRIMP		
			PRODUCT SPEC 108-1584			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -			APPLICATION SPEC 114-13025	SIZE A2 CAGE CODE 00779 DRAWING NO C=415011 RESTRICTED TO -		
			WEIGHT -			
MATERIAL 1 2 3 4			FINISH 6 5 14	CUSTOMER DRAWING		
			SCALE 8:1	SHEET 1 OF 1 REV K		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[415011-1](#)