



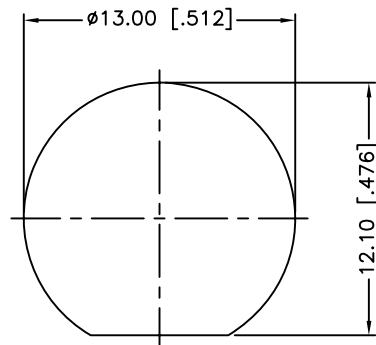


RECOMMENDED
MOUNTING HOLE

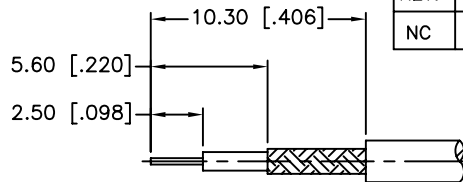


RECOMMENDED
CABLE STRIPPING DIM'S

REV.	DATE	ECR NO.	DESCRIPTION
NC	03/04/10	XXXXXX	INITIAL RELEASE

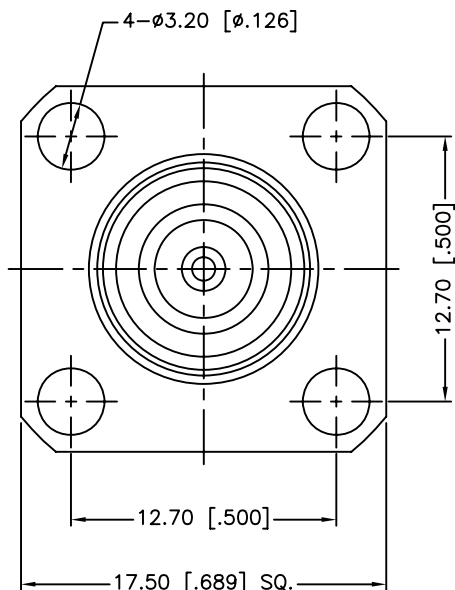

7/16-28UNEF-2A

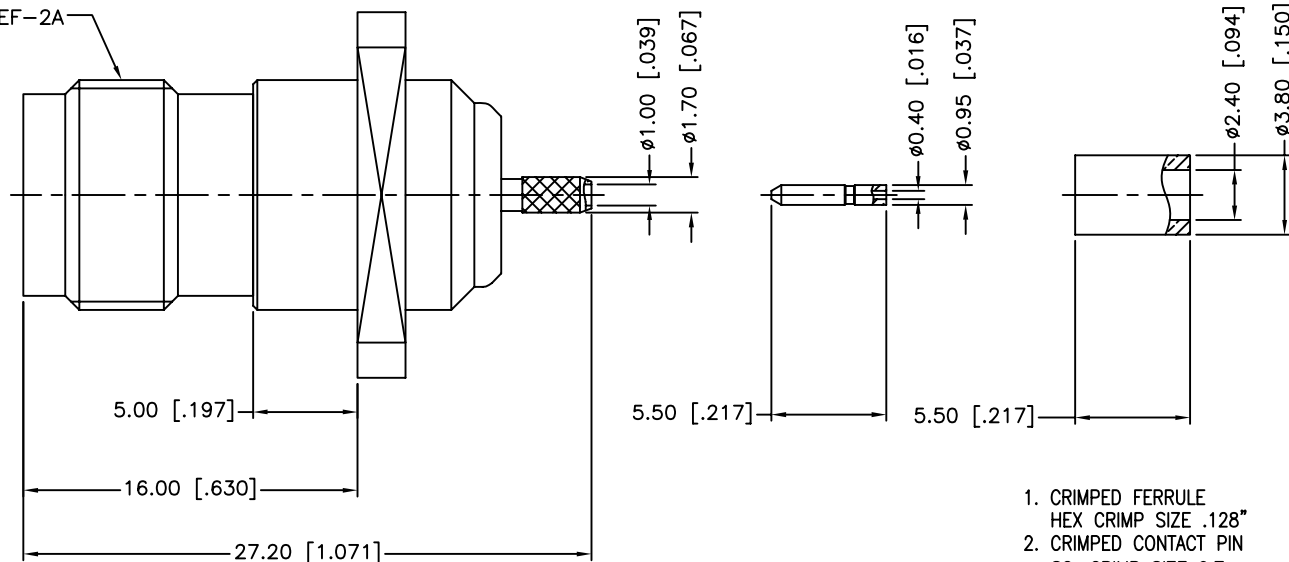

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

7	FERRULE	COPPER	NICKEL	1
6	CONTACT PIN	BRASS	GOLD	1
5	BARREL	BRASS	NICKEL	1
4	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
3	INSULATOR	PTFE	NATURAL	1
2	BODY	BRASS	NICKEL	1
1	HOUSING	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm $\pm$ 0.20mm
8 - 30mm $\pm$ 0.40mm
30 - 120mm $\pm$ 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 $\pm$ 0.007"
.315 - 1.180 $\pm$ 0.015"
1.180 - 4.724 $\pm$ 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	03/04/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/122442RP.DWG

Amphenol Connex

PART DESCRIPTION

TNC REVERSE POLARTY BULKHEAD CRIMP JACK
(FOR RG-178B/U,196A/U)

PART NO.

122442RP

DWG. NO. 122442RP.DWG

REV. NC

SIZE A

SCALE NA

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122442RP](#)