

4



3

2

1

REVISION

ZONE	LTR	ECN	DESCRIPTION	DATE	APPROVED
	C	39399	GENERAL DWG UPDATE	9/12/99	mic

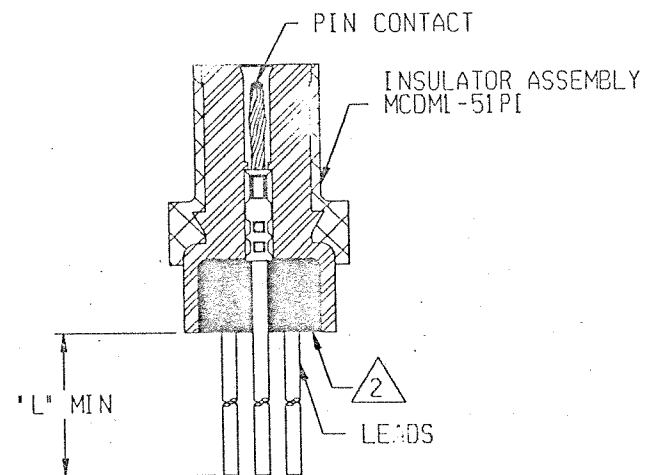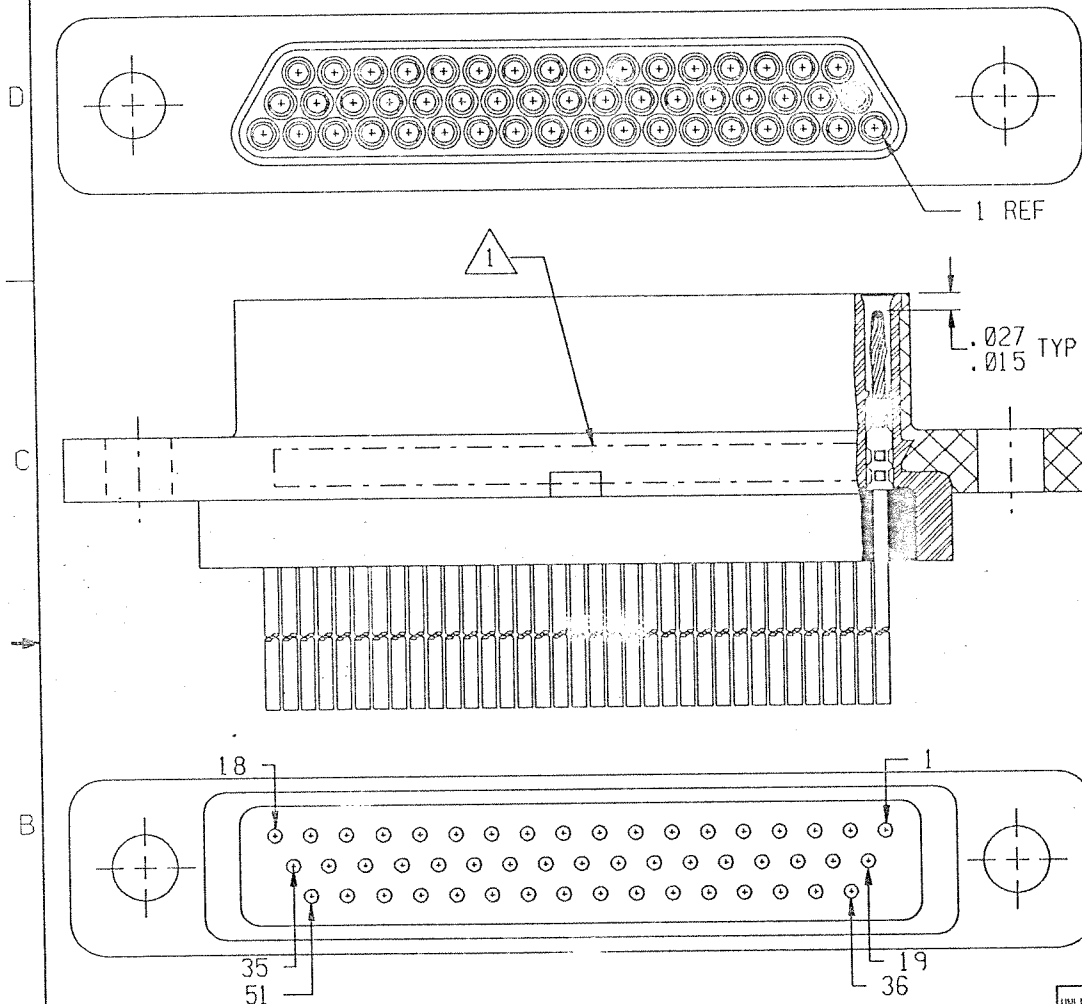

NOTES: UNLESS OTHERWISE SPECIFIED

△ MARK PER TIS.

△ POTTING COMPOUND USED IS 191-3102-6215/6225.

3. CRIMP LEADS INTO CONTACTS PER MEP 302-05.

4. EPOXY WICKING FROM THE REAR OF INSULATOR ON INSULATED LEADS MUST NOT EXCEED .125 MAX ON #25 AWG AND SMALLER LEADS AND .200 MAX ON #24 AWG AND LARGER LEADS.

2-1532133-0

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCE ARE:

FRACTIONS	DECIMALS	ANGLES
± 1/8	.XX ± .01 .XXX ± .005	± 2°

MATERIAL:

FINISH:

APPROVALS

SIGNATURE

DATE

DRAWN BY
MEL F. CAMPOS 09/17/99

P.E. *[Signature]*

M.E.

D.A.

THIS DOCUMENT IS THE PROPERTY OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC. USE OF THIS DOCUMENT OR ANY PART THEREOF IS STRICTLY FORBIDDEN WITHOUT THE EXPRESS WRITTEN PERMISSION OF MICRODOT CONNECTORS, A DIVISION OF UNI-STAR INDUSTRIES INC.



MICRODOT CONNECTORS
A DIVISION OF UNI-STAR INDUSTRIES INC.
386 PASADENA AVE., SO. PASADENA, CA 91030

METAL SHELL 'D' CONNECTOR
MCDML-B-51P

PROD
CODE
842

CODE
M

SIZE CODE IDENT NO. DRAWING NO.
A 98278 095-0000-0080

SCALE: NONE

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-1532017-9](#)