
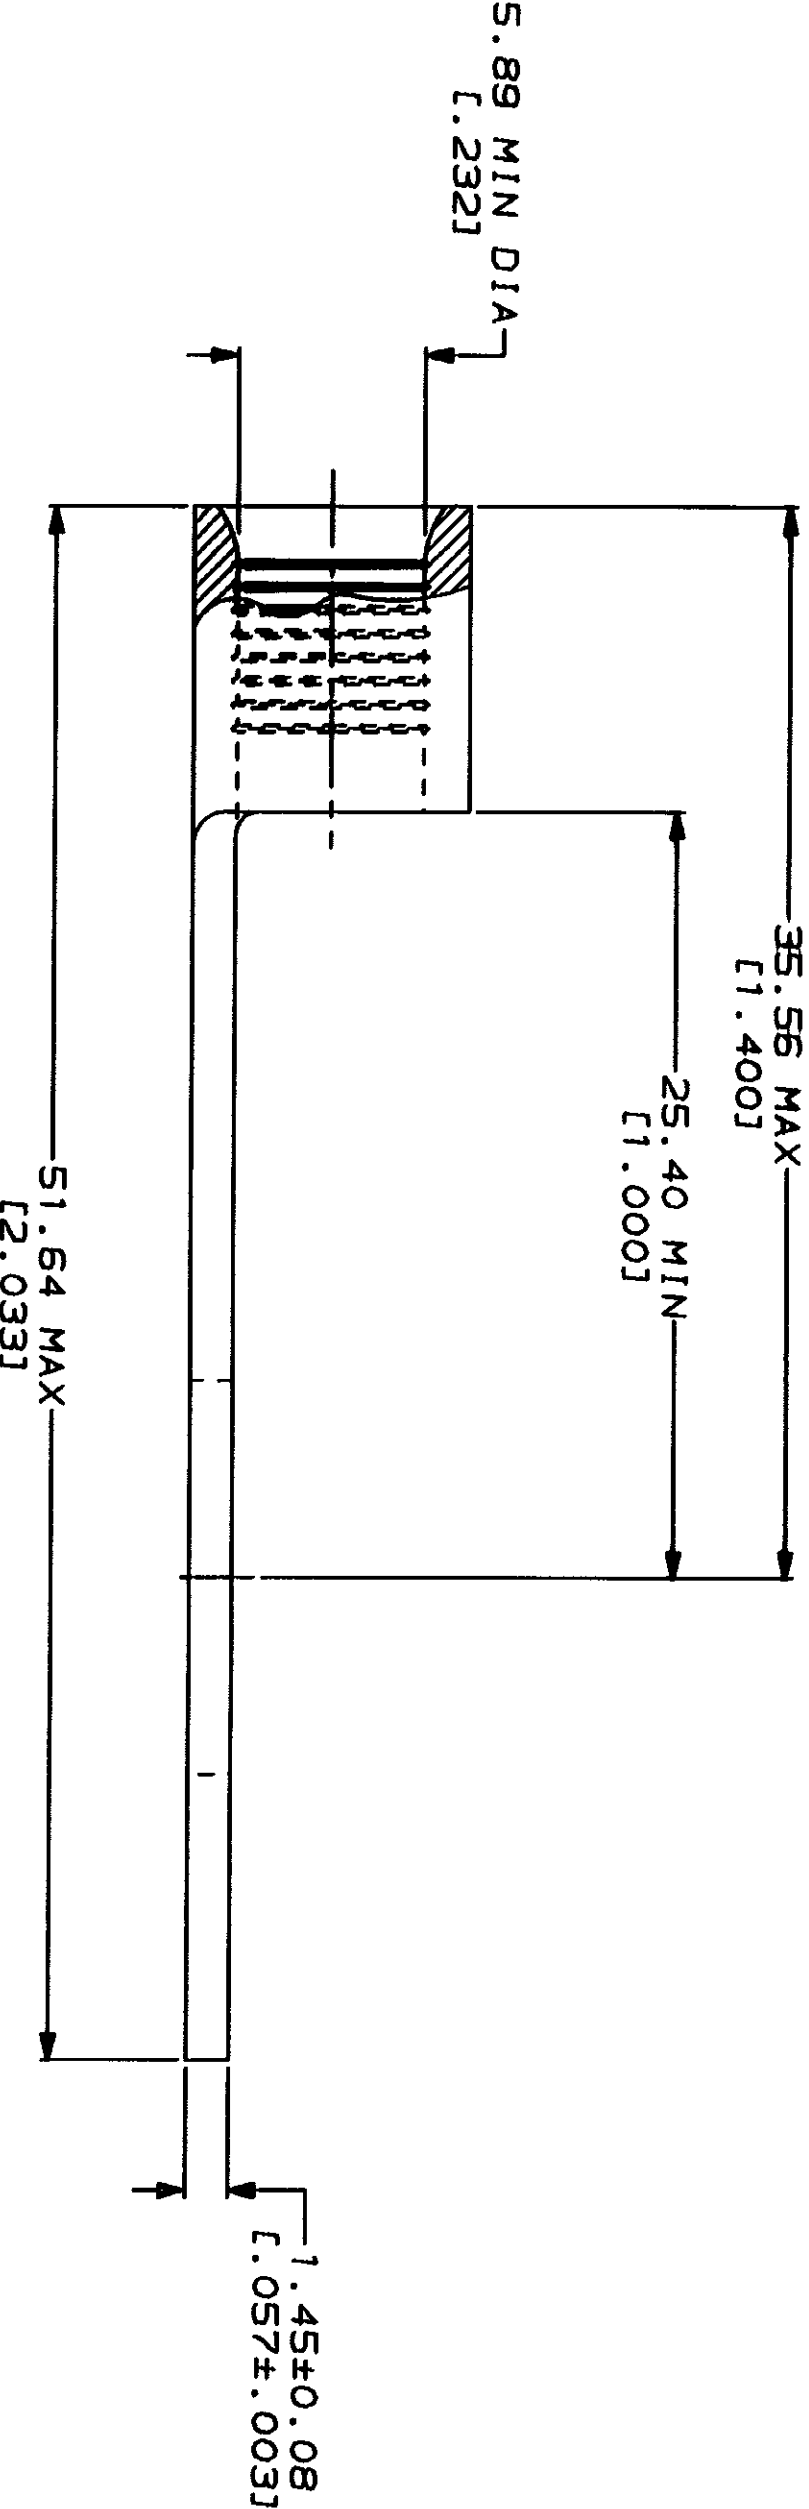


METRIC
DIMENSIONS LISTED IN mm [INCHES]

WIRE RANGE	E13288 Listed
6 AWG SOLID OR STRANDED	6 AWG STRANDED
6 AWG SOLID OR STRANDED	NOT APPLICABLE

△ STAMP AMP SIZE APPROX AS SHOWN

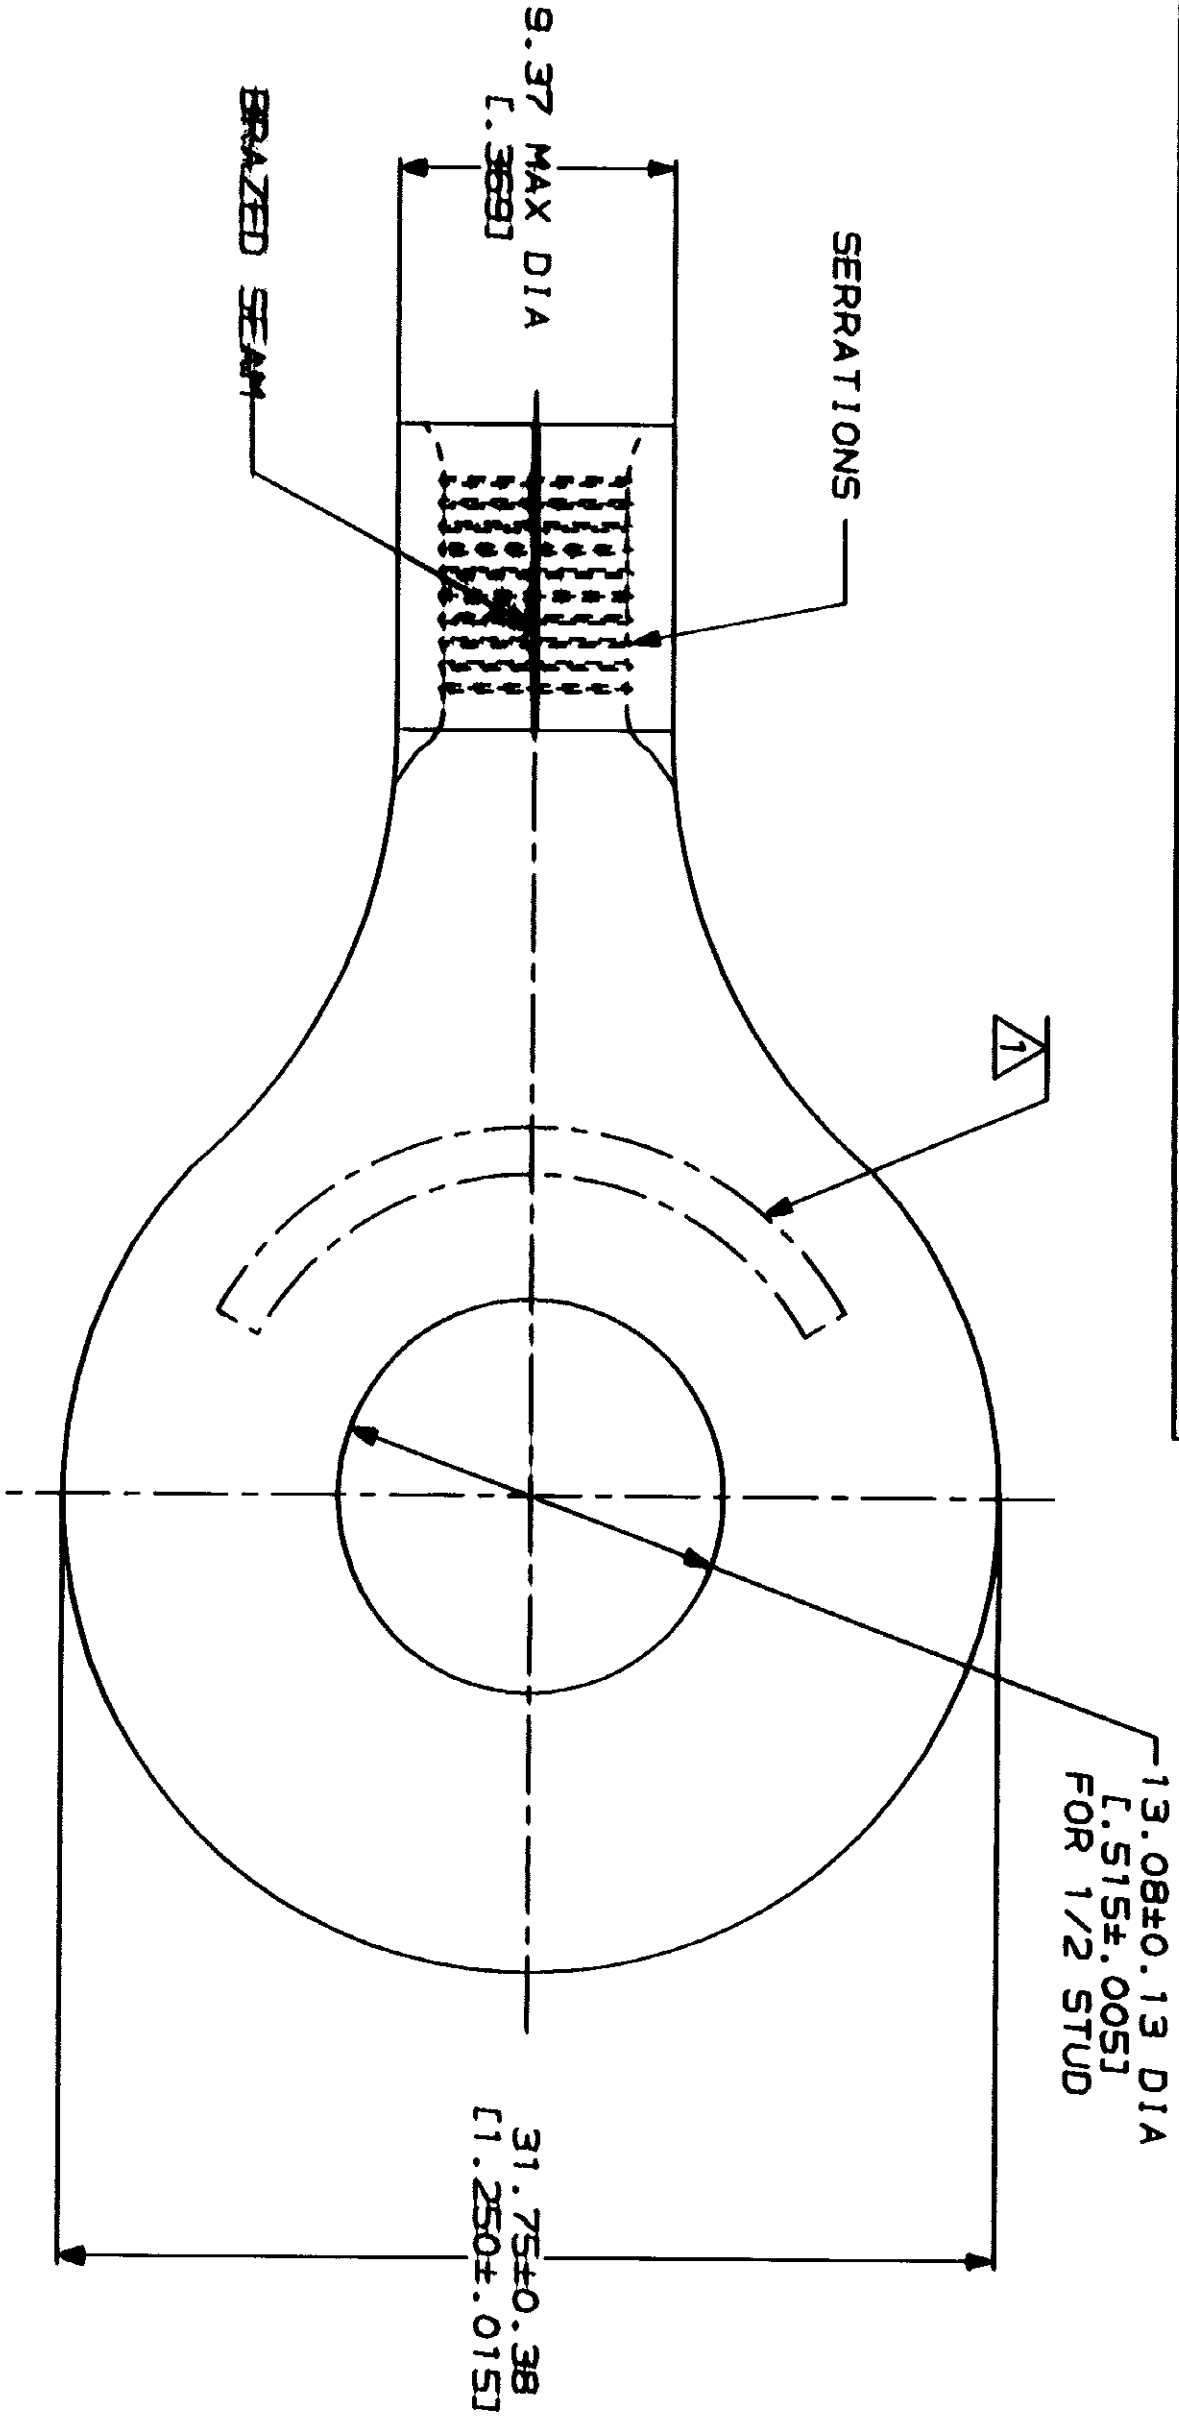

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER
1-800-522-6752

FOR APPLICATION
TOOLING INFORMATION

TOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C MAX

VOLTAGE RATING:
NOT APPLICABLE

WIRE CROSS SECTIONAL AREA RANGE:
10.5-16.8mm² [20,800-33,100] CIR MILS
SOLID OR STRANDED

DO NOT SCALE PRINT.
UNLESS SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCES:
FRACTIONS DECIMALS
FRACTIONS DECIMALS
FRACTIONS DECIMALS

FINISH
TIN PLATE
0.00254 [1.00100] MIN
THK PER MIL-T-10727

DR 3-24-93
TA-SHOWMAN
DATE 3-24-93
DRAWN BY

APPRO 3-24-93
JL MCKLEY
PRODUCT SPEC

TERMINAL, RING TONGUE,
SOLISTRAND™

AMP
AMP Incorporated
Harrisburg, PA 17105-3608

SIZE CASE CODE DRAWING NO
G 00779 C-36808

QTY PACKAGE TYPE PART NO

500 LOOSE PIECE, BOX 36808-1

LOOSE PIECE 36808

4:1

SHEET 1 OF 1

CUSTOMER DRAWING

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36808](#)