

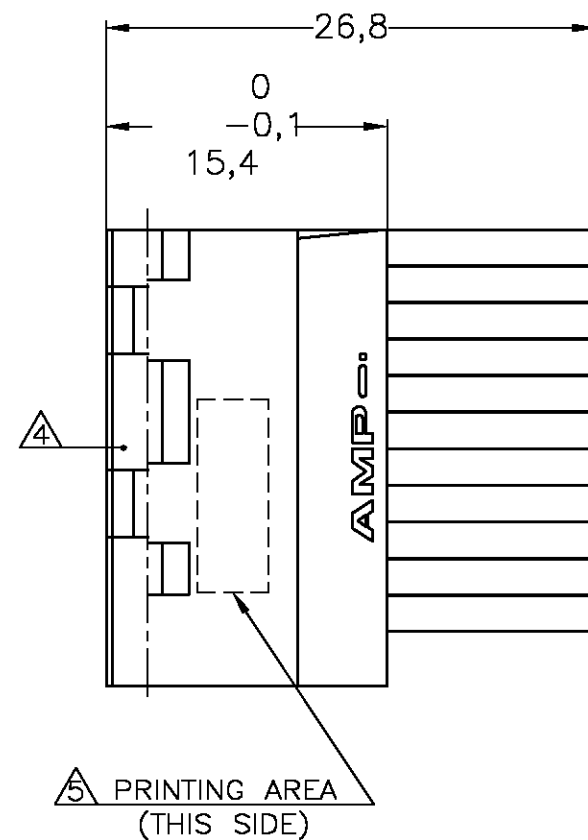


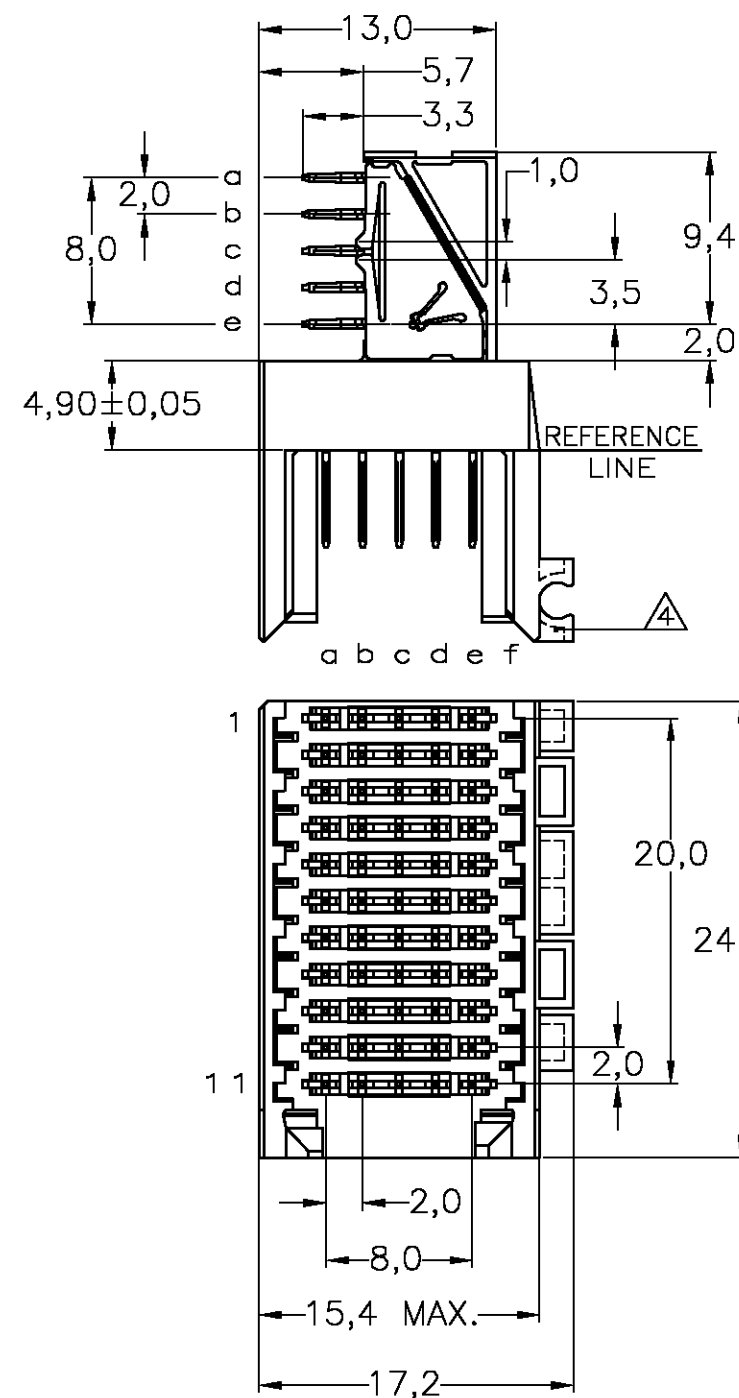


CONTACT DIMENSIONS

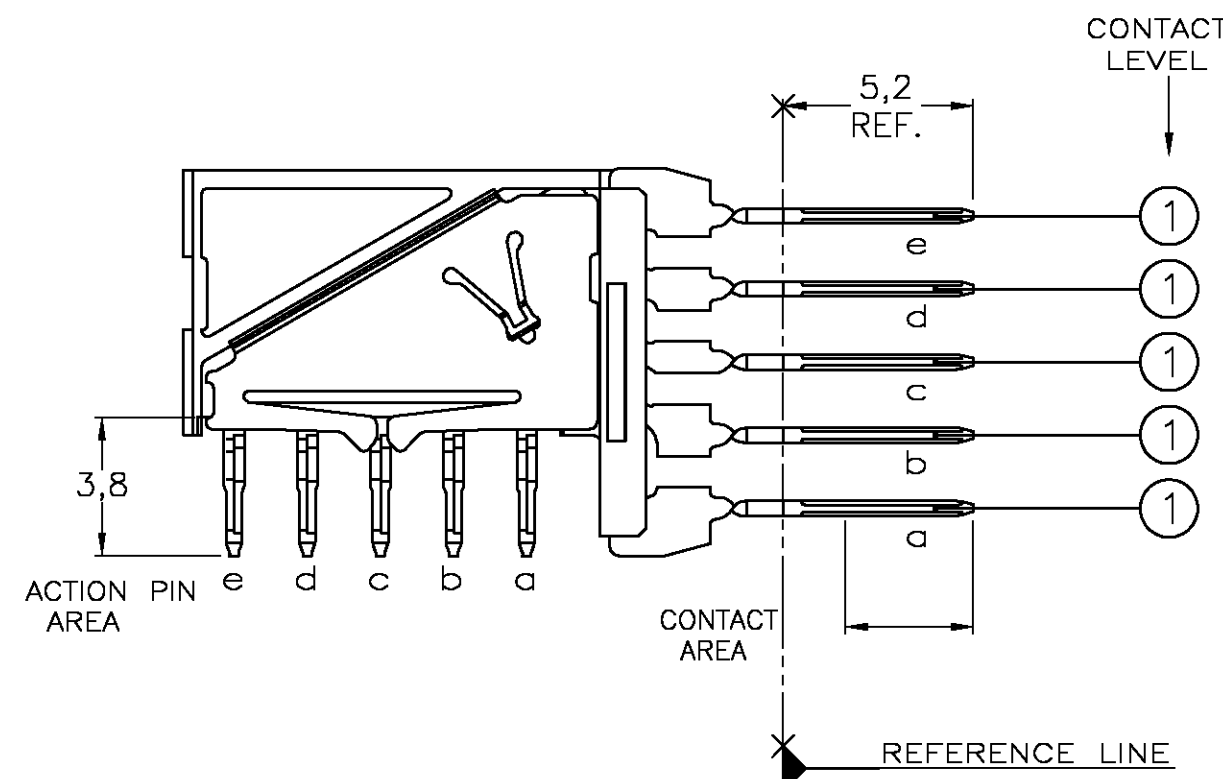


RECOMMENDED PCB-HOLE LAY-OUT

COMPONENT SIDE SHOWN

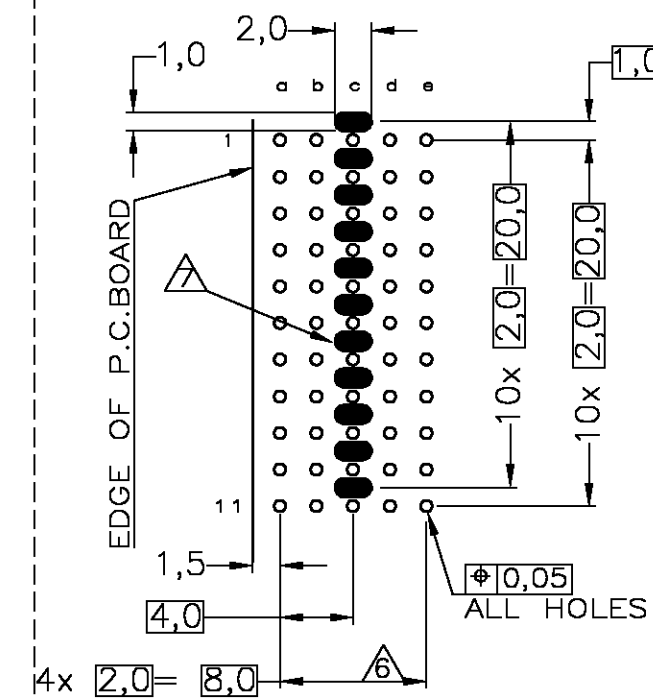

CONTACT LAYOUT

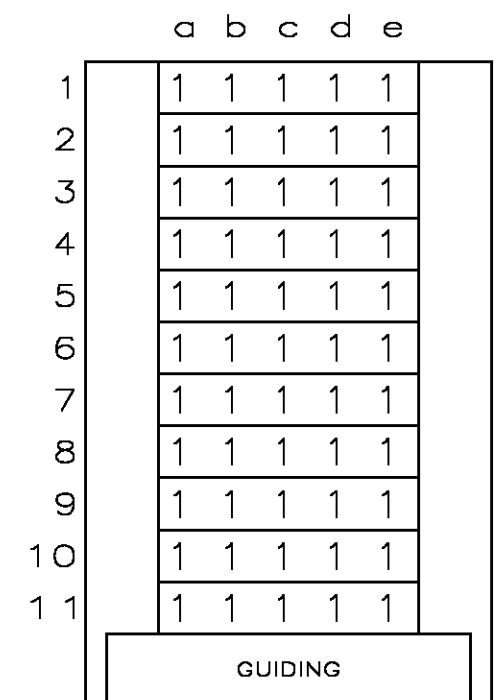

NOTES:

-  MATERIAL HOUSING : GREY GLASS FILLED POLYESTER
 : UL-RATING V0
 CONTACT : PHOSPHORBRONZE
-  GENERAL CONTACT PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
 1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
 FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
 REFERENCE FOR EACH DASH NUMBER.
 REDUCED CROSS-TALK SHIELD: GOLD FLASH OVER 1,27μm NICKEL MIN.
-  CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
 PERFORMANCE LEVEL 2.
-  CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.
-  CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
-  PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
-  PLATED SPOT ONLY ON COMPONENT SIDE, FORMING ONE CONTACT
 WITH PLATED THROUGH HOLES OF ROW C

P.C.B. HOLE DIM. ACTION PIN FIN. HOLE : 0,55 TO 0,65mm OTHER REQUIREMENTS SEE APPLICATION SPECIFICATION
--

LOC H	D/ST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			D	EH10-0680-05	06-06-05	BSV	BM
			D1	ECR-06-002635	07-02-06	BSV	BM
		E	ECR-06-026577	14-11-06	BSV	BM	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN L.V.D.HEJWEN CHK D.TRUREN 12FEB98		12FEB98				Tyco Electronics Corporation s-HertogenBosch, Netherlands,		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F.V.KONINGSBRUGGE		NAME		Z-PACK 2MM HM TYPE C			
mm		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-19082		55 POS. RIGHT ANGLE MALE CONNECTOR WITH REDUCED CROSS-TALK SHIELDS					
				APPLICATION SPEC 114-19029		SIZE		CAGE CODE		DRAWING NO	
MATERIAL		FINISH		WEIGHT		A2		00779		C-352273	
-		-		-						RESTRICTED TO -	
CUSTOMER DRAWING								SCALE		NTS	
								SHEET		1 OF 1	
										REV F	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[352273-1](#)