

Heyco® Nytye® Nylon Cable Tie Variations

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Tensile Strength		Max. Bundle Diameter		Natural	UV Black		A Length		B Width	
Lbs.	N	in.	mm.				in.	mm.	in.	mm.

Low Profile

18	80	.98	25,0	14110	14110B	LPNT-18-043	4.33	110	.10	2,5
		1.57	40,0	14111	14111B	LPNT-18-061	6.10	155		
		2.00	51,0	14112	14112B	LPNT-18-080	8.07	205		
40	178	1.29	33,0	14113	14113B	LPNT-40-059	5.90	150	.14	3,6
		2.00	51,0	14114	14114B	LPNT-40-080	8.07	205		
		3.03	77,0	14115	14115B	LPNT-40-110	11.02	280		
		4.05	103,0	14116	14116B	LPNT-40-145	14.56	370		
50	222	2.04	52,0	14117	14117B	LPNT-50-080	8.04	205	.18	4,6
		2.67	68,0	14118	14118B	LPNT-50-100	10.04	255		
		2.99	76,0	14119	14119B	LPNT-50-110	11.02	280		
		4.05	103,0	14120	14120B	LPNT-50-145	14.56	370		
120	534	3.03	77,0	14121	14121B	LPNT-120-110	11.02	280	.30	7,6
		4.05	103,0	14122	14122B	LPNT-120-145	14.56	370		

Releasable

40	178	1.38	35,0	13297	13297B	RNT-40-059	5.94	151	.14	3,5
50	222	1.97	50,0	13301	13301B	RNT-50-079	7.95	202	.18	4,5
		3.00	76,0	14000	14000B	RNT-50-110	11.02	280	.19	4,8
		1.18	30,0	14005	14005B	RNT-50-049	4.92	125	.28	7,2
		1.38	35,0	14010	14010B	RNT-50-059	5.90	150		
		1.97	50,0	14011	14011B	RNT-50-079	7.87	200		
		2.60	66,0	14012	14012B	RNT-50-098	9.84	250	.30	7,6
		3.27	83,0	14013	14013B	RNT-50-118	11.81	300		
		3.54	90,0	14014	14014B	RNT-50-137	13.78	350		

Screw Mount


18	80	.87	22,0	13307	-	MNT-18-044	4.41	112	.10	2,5	#4 screw
40	178	1.38	35,0	13308	-	MNT-40-067	6.69	170	.14	3,6	#8 screw
50	222	1.75	44,4	3560*	-	MNT-150	8.00	203	.19	4,8	#10 screw
		1.97	50,0	13309	-	MNT-50-086	8.66	220	.17	4,3	

Identification


18	80	.87	22,0	13316	-	NTID-18-039	3.94	100	.10	2.5	.31	8,0	1.00	25.4
				13317	-	NTID-18-039-1	3.94	100	.10	2.5	.83	21,0	1.10	28,0

Standard color natural and UV Black. Consult Heyco for heat-stabilized material and colors.


*cURus

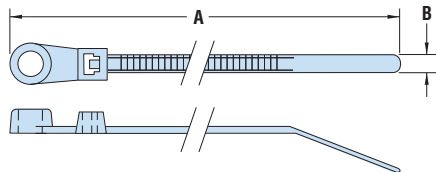

Screw Mount

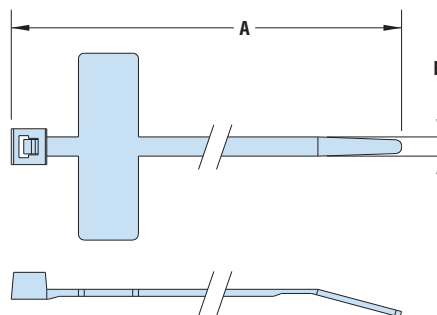

Identification



Low Profile



Releasable

Material	Nylon 6/6
Certifications	 Certified by Underwriters' Laboratories for compliance with both Canadian and US Requirements under File E54523 (Releasable and Screw Mount Nytyes only)
Flammability Rating	94V-2
Temperature Range	32°F (0°C) to 185° F (85° C)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Heyco:

[13301](#) [13297](#) [13302](#) [14010B](#) [14113](#) [14113B](#) [14010](#) [14112](#) [14112B](#) [14120B](#) [14121B](#) [14122](#) [14111](#) [14114B](#)
[14119](#) [14011B](#) [14013](#) [14014B](#) [14000B](#) [14012](#) [14110B](#) [14111B](#) [14115](#) [14118B](#) [14119B](#) [14012B](#) [14115B](#) [14011](#)
[14116B](#) [14116](#) [13317](#) [14005](#) [14005B](#) [14114](#) [14121](#) [14000](#) [14110](#) [14120](#) [14122B](#) [14013B](#) [14014](#) [14117](#)
[14117B](#) [14118](#) [13301B](#) [13297B](#) [13309B](#) [13308B](#)