
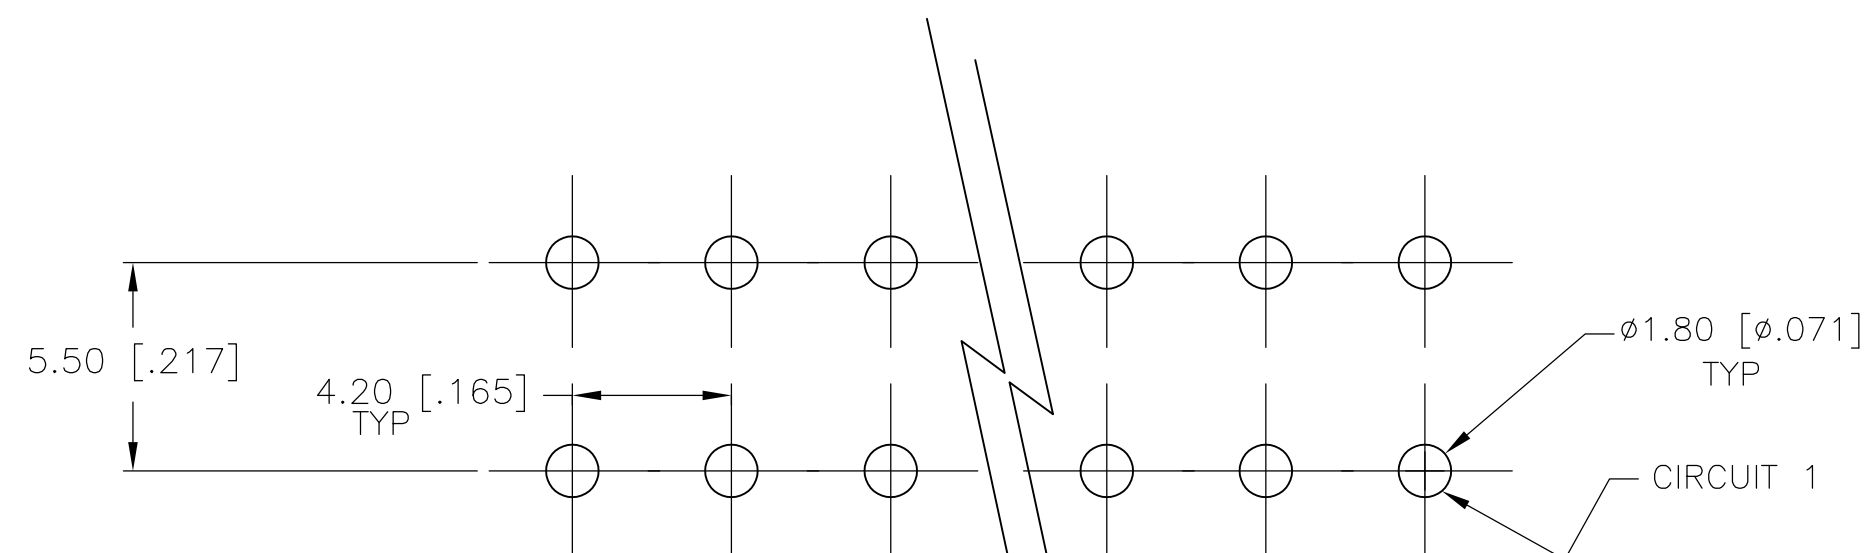
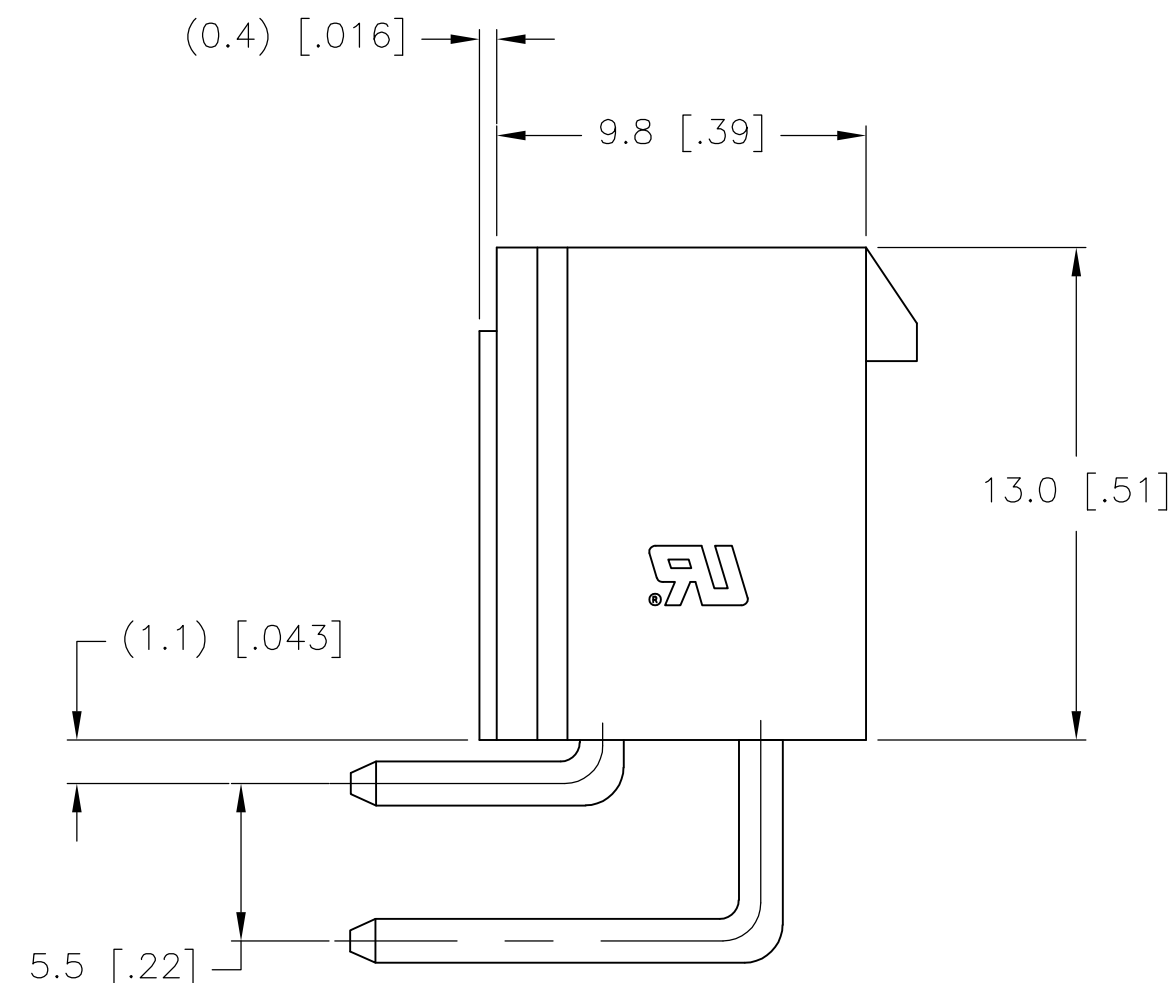


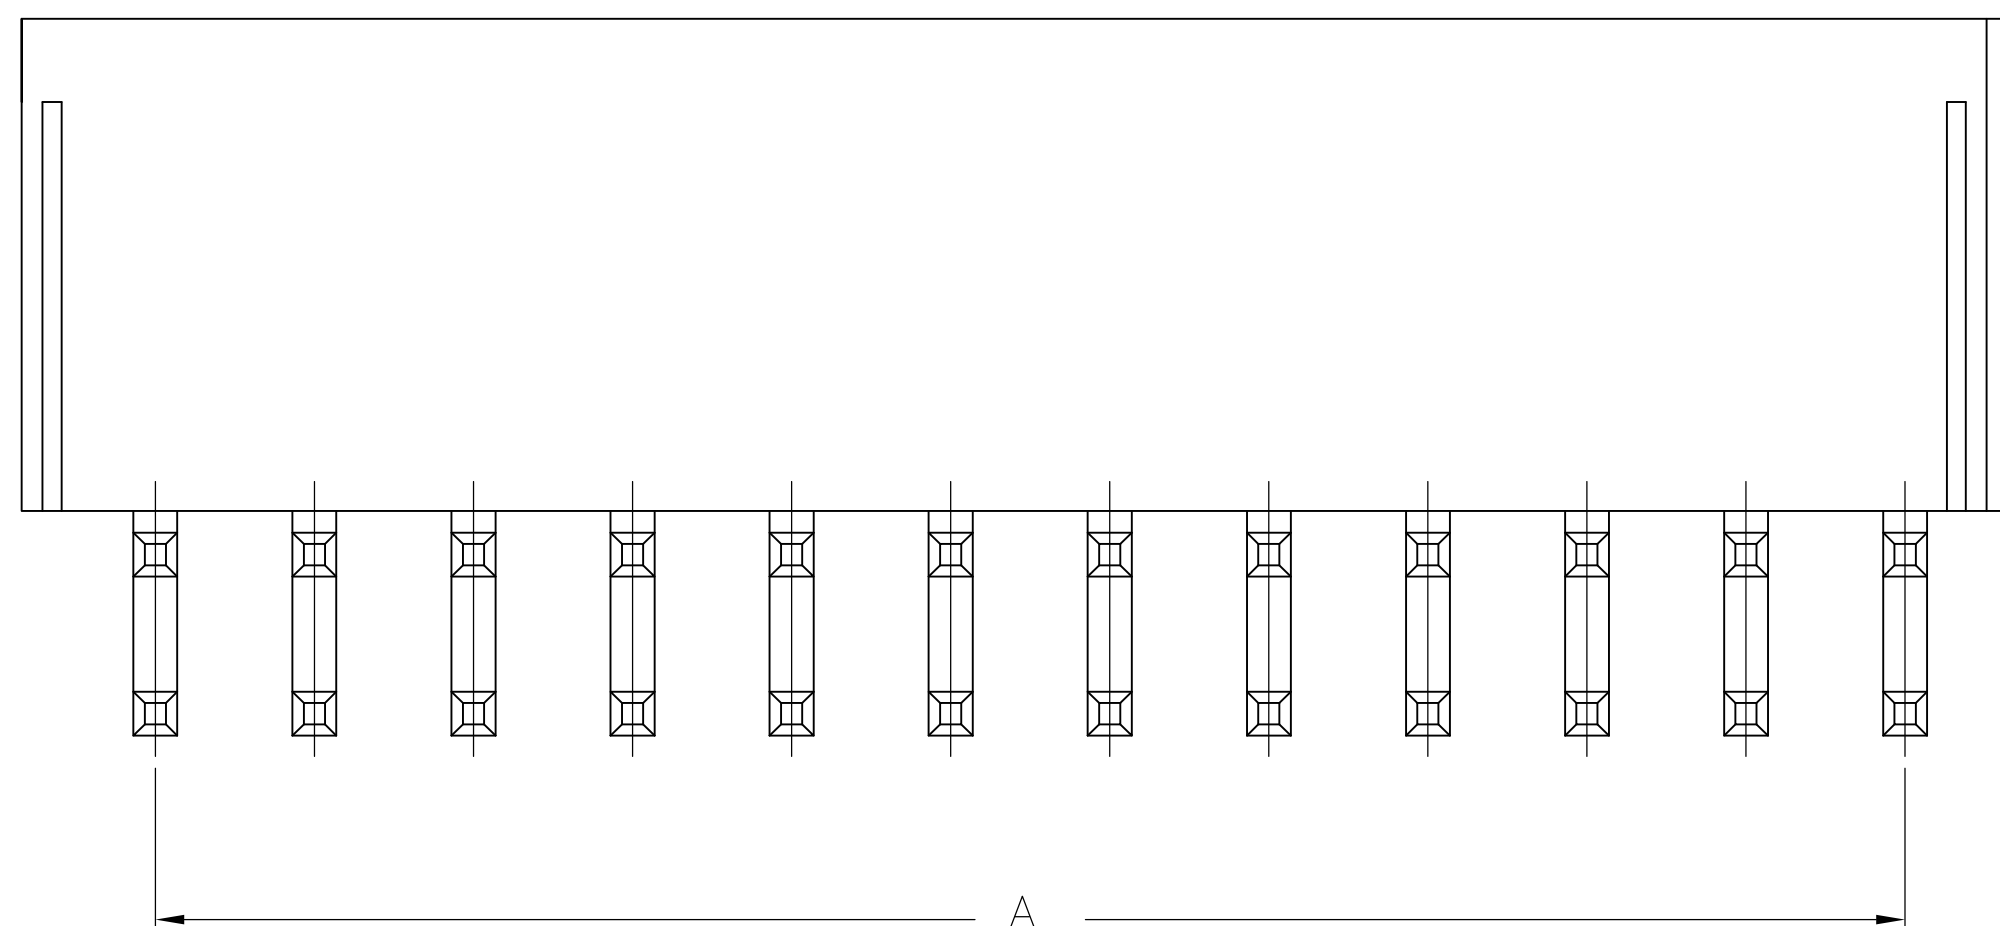

PCB LAYOUT: COMPONENT SIDE
RECOMMENDED BOARD THICKNESS 1.60 [.063]

2-2029163-4 SHOWN

24	46.2±0.2 [1.82±.01]	51.6 [2.03]	2-2029163-4
22	42.0±0.2 [1.65±.01]	47.4 [1.87]	2-2029163-2
20	37.8±0.2 [1.49±.01]	43.2 [1.70]	2-2029163-0
18	33.6±0.2 [1.32±.01]	39.0 [1.54]	1-2029163-8
16	29.4±0.2 [1.16±.01]	34.8 [1.37]	1-2029163-6
14	25.2±0.2 [.99±.01]	30.6 [1.21]	1-2029163-4
12	21.0±0.2 [.83±.01]	26.4 [1.04]	1-2029163-2
10	16.8±0.1 [.66±.00]	22.2 [.87]	1-2029163-0
8	12.6±0.1 [.50±.00]	18.0 [.71]	2029163-8
6	8.4±0.1 [.33±.00]	13.8 [.54]	2029163-6
4	4.2±0.1 [.17±.00]	9.6 [.38]	2029163-4
2	—	5.4 [.21]	2029163-2
POS	A	B±0.35[±.01]	PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-2029163-6](#)