

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	ISED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.
Material	High Conductivity Seamless Copper Tube	
Plating	Electro-Tin	45 R Ref
Wire Size	3/0 AWG	
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	
Wire Strip Length	7/8 in.	<b>PANDUI</b> Sept.04  PANDUI  PAN
Stud Size	3/8 in.	
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.39±.0441±.02 DIA
UL Temperature Rating	90°C	2.03±.06
C.S.A Certified Wire Connector	Yes	
Panduit Color Code on Barrel	ORANGE	.83:
Panduit Die Index No. on Barrel	P50	Wire inspection window
Alternate Industry Die Index No. ( ) on Barrel	(14)	





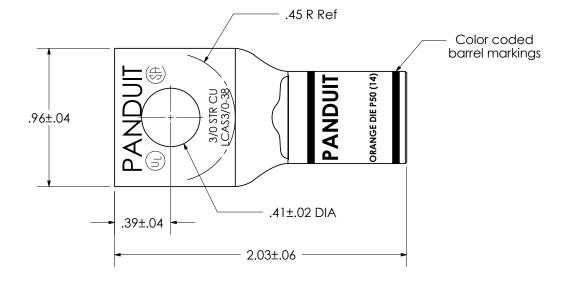

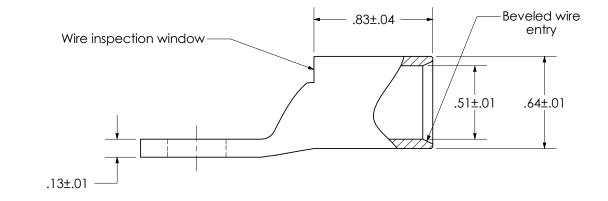

						PANDUIT CORP. TINLEY PARK, ILLINOIS
01	11/10	IHNIII	IHNII	REMOVED NAVY NUMBER FROM STAMP		LCAS3/0-38-X Copper Lug - One-Hole, Short Barrel
REV	DATE		СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCAS3_0-38-CUST

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: LCAS3/0-38-X