
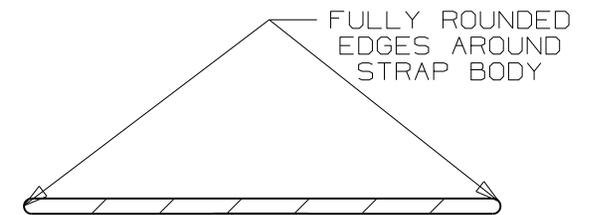


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" +/- .3" [7]
MRT1.5H-L6	50	1.5" [38]	10.6" (296)
MRT2H-L6	50	2.0" [51]	12.2" (310)
MRT4H-L6	50	4.0" [102]	18.5" (470)
MRT6H-L6	50	6.0" [152]	24.8" (630)

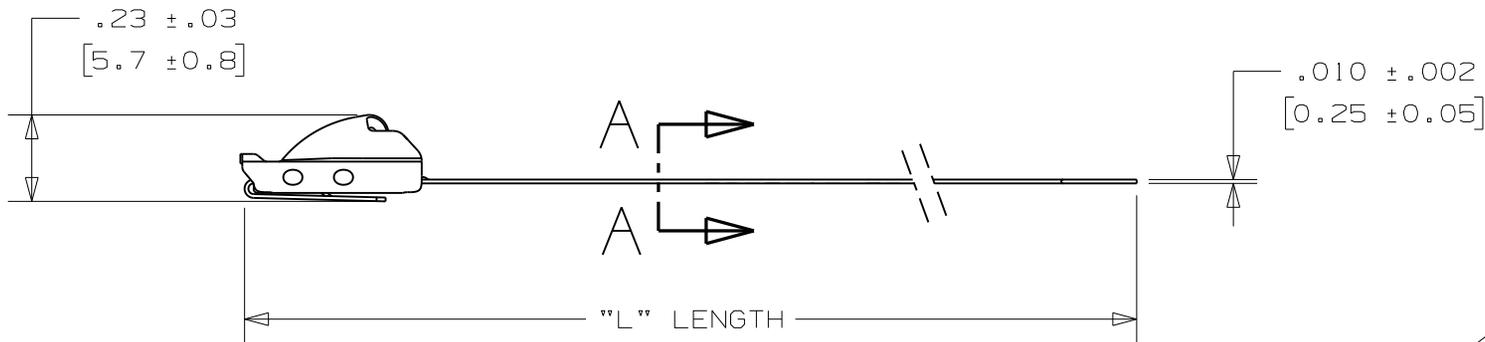

SECTION A - A
SCALE 8:1

NOTES:

1. APPLICATION TOOLS - MTRTH & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTES DIMENSION IN MILLIMETERS
4. TOLERANCES:
 .XXX = ±.010 [.25] .XX = ±.02 [.5]
 .X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 316 STAINLESS STEEL

05A	10/09	MIM	SKB	REVISED PART LENGTHS FOR IMPROVED APPLICATION TOOL PERFORMANCE	
04A	2/09	JAMB	EJD	UPDATE DWG TO REFLECT CURRENT PRODUCTION PART ADDED "PTRT" APPLICATION TOOL	
03A	6/07	JAMB	EJD	APPLICATION TOOLS WERE MTRT1 & PTRT1	-----
02A	1/07	JAMB	EJD	© REMOVED PART NO'S. MRT8H-L6 & MRT10H-L6 FROM TABLE	SS00317
01A	11/06	JAMB	EJD	Ⓐ ADDED .500" TO THE LENGTH "L" TO ALL PART NO'S. IN TABLE. Ⓞ DIM .39" WAS .392"	SS00277
REV	DATE	BY	CHK	DESCRIPTION	ECN #

 PANDUIT TM TINLEY PARK, ILLINOIS	METAL TIE - HEAVY SERIES RETAINED TENSION - 316 STAINLESS STEEL CUSTOMER DRAWING	
	DRAWN BY JAMB	CHK'D EJD
		DRAWING NO. N41236BS_DC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panduit:](#)

[MRT1.5H-L6](#) [MRT4H-L6](#) [MRT6H-L6](#)