

D

C

B









A

D

C

B

A

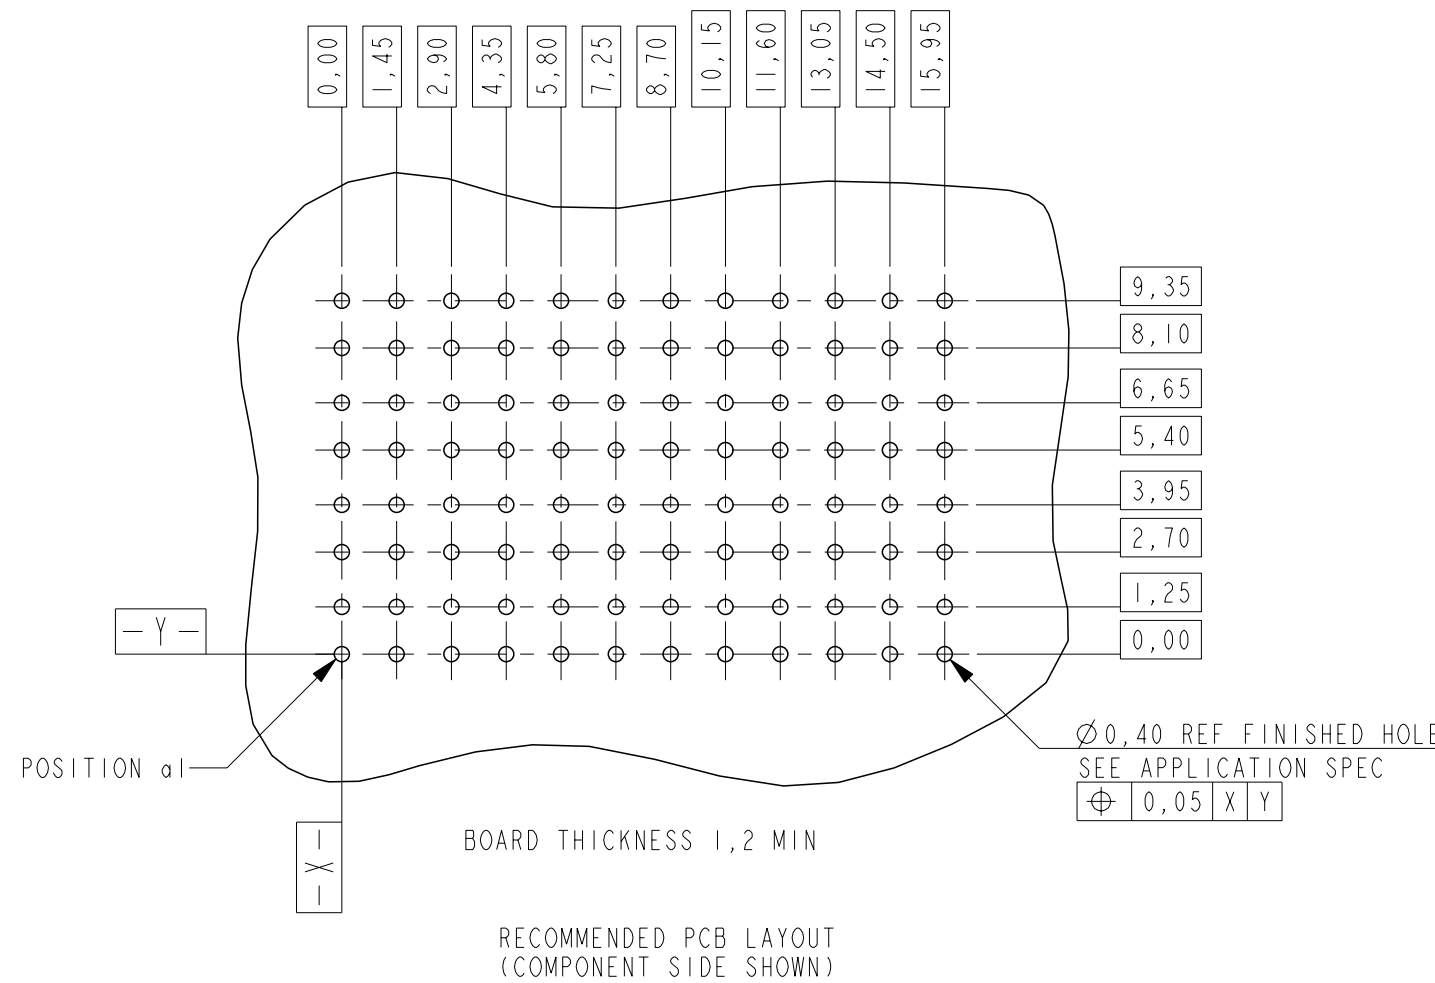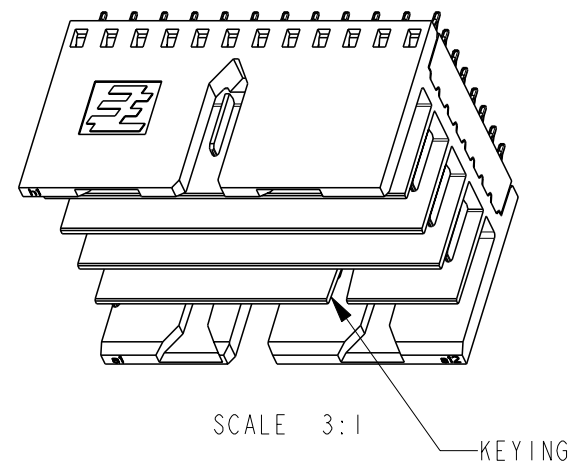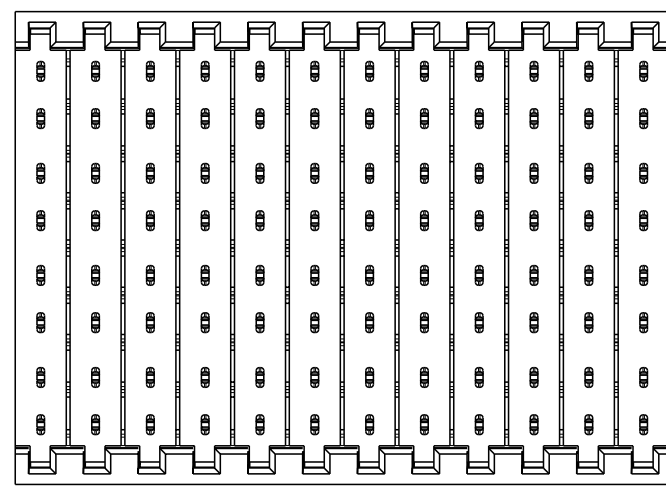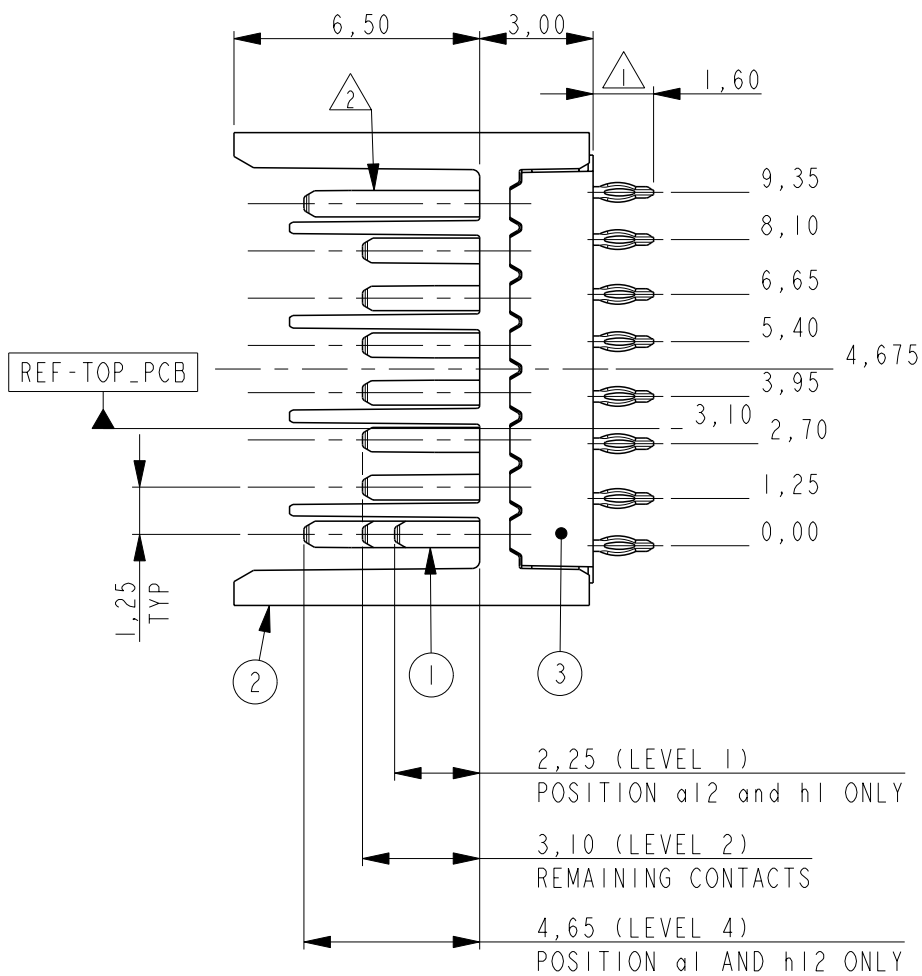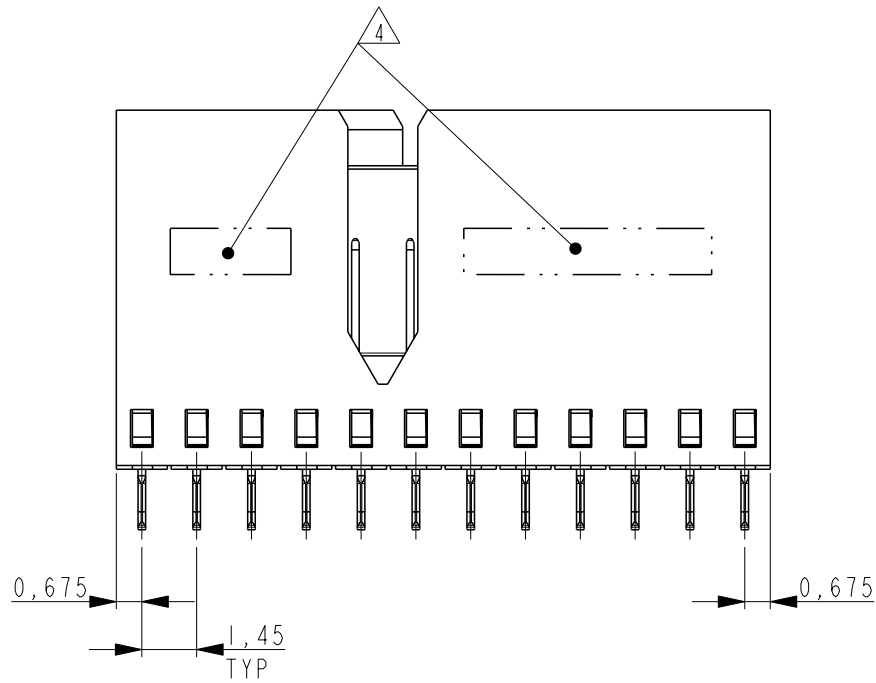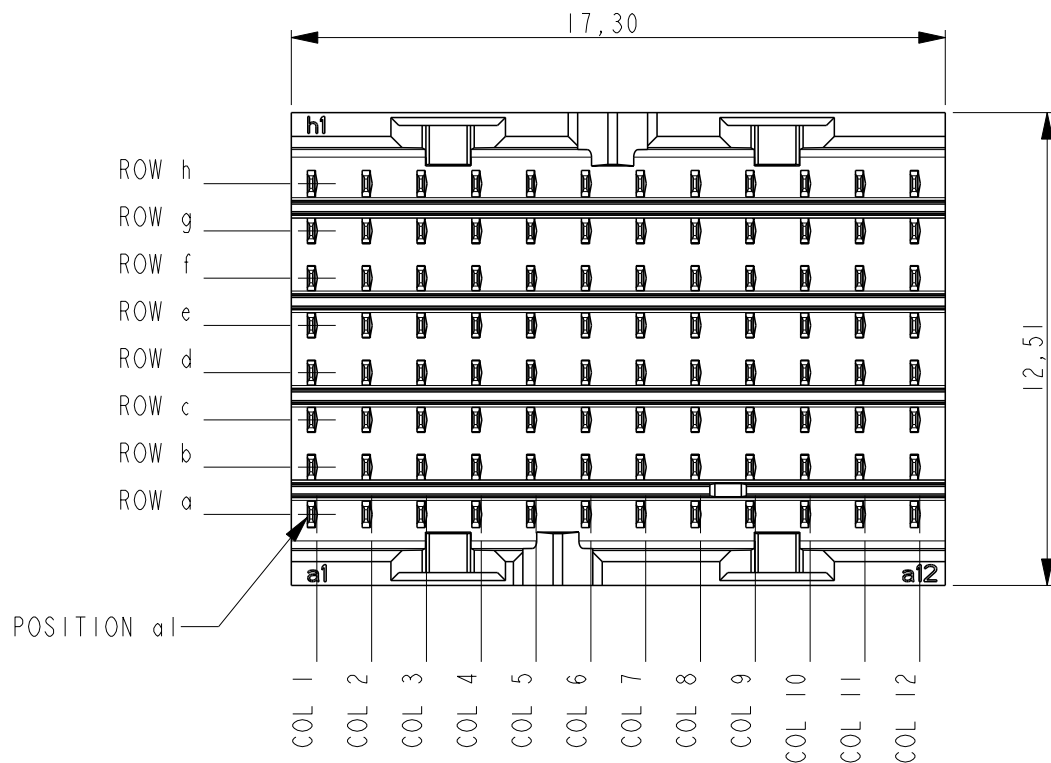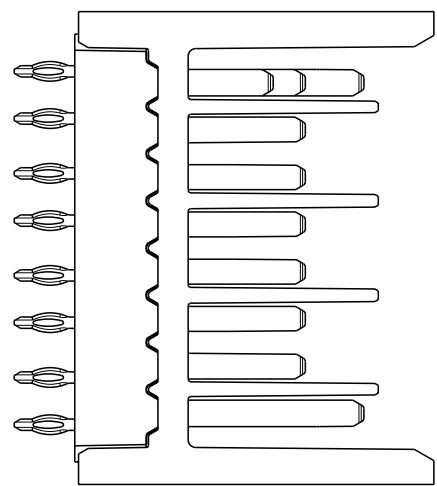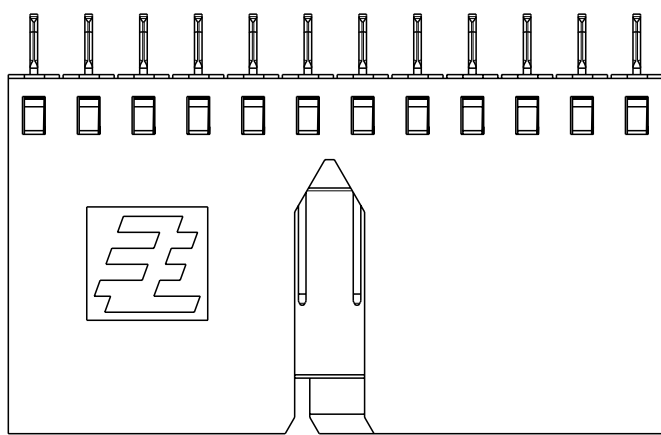

NOTES:

- 1 PLATING: 0,5µm MIN. TIN OVER NICKEL.
2 PLATING:

PARTNUMBER	PERFORMANCE LEVEL
2042257-1	PERFORMANCE LEVEL 1: CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III: UNCONTROLLED ENVIRONMENT APPLICATIONS. SEE PRODUCT SPEC 108-19353
2042257-2	PERFORMANCE LEVEL 2: CONFORMS TO ALL TESTING ACCORDING PRODUCT SPEC 108-19320, -250 MATING CYCLES, 4 DAYS MIXED GAS TEST PER IEC 60068-2-60 METHOD I

- 3 CONSULT APPLICATION SPEC OR CONTACT TE CONNECTIVITY FOR PERMISSIBLE CONTACT ASSIGNMENTS.
4 CONNECTOR MARKED WITH PARTNUMBER AND DATE CODE.
5 FOR PC-BOARD ROUTING RECOMMENDATIONS SEE SPEC 114-19140

PRODUCT HAS NOT COMPLETED QUALIFICATION TESTING

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RA	13 MARCH 08	 TE Connectivity					
DIMENSIONS: mm		CHK RA	13 MARCH 08						
		APVD MW	13 MARCH 08	NAME MALE CONNECTOR Z-PACK Slim UHD -					
		PRODUCT SPEC SEE NOTE 2							
MATERIAL -		APPLICATION SPEC 114-19106		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
		WEIGHT -		A2	00779	C-2042257	-		
		CUSTOMER DRAWING		SCALE	5:1	SHEET	1 OF 1	REV	A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2042257-2](#)