




Quality Products. Service Excellence.

Type 4, 4X Polyester Pushbutton Enclosure *PJPBLC Series*

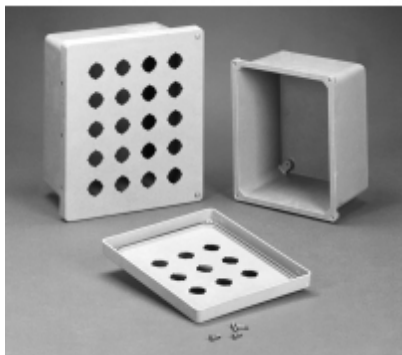

Application

- Designed for use as pushbutton enclosures for 30.5mm devices.
- Provides outstanding insulation and protection where equipment may be hosed down or be very wet.
- Ideal in applications with high temperatures or highly corrosive environments.

Standards

- UL 508A Type 1, 2, 3, 4, 4X, 12 and 13
- CSA Type 1, 2, 3, 4, 4X, 12 and 13
- **Complies with**
 - NEMA Type 1, 2, 3, 4, 4X, 12 and 13
 - IEC 60529, IP66

Construction

- Molded fiberglass polyester enclosure with matching cover is easily punched, cut, or drilled.
- Standard JIC sizes under 18" x 16".
- Threaded brass inserts are provided for optional inner panel or terminal kit mounting.
- Cover is fastened with captive stainless steel screws in threaded brass inserts.
- Captive oil resistant gasket provides a positive seal.
- Threaded brass inserts are provided for mounting feet to the rear of the enclosure.
- Stainless steel mounting brackets and hardware are provided for mounting to the rear of the enclosure.
- Enhanced UV inhibitors protect against outdoor weathering.
- Operating temperatures between 130°C and -40°C (266°F to -40°F).
- Impact index of 6.78J (5 ft/lb).
- For corrosion resistance information, please refer to table in **Technical Information**.

Finish

- Fiberglass polyester material has a gray finish.
- Optional inner panels are available in white powder coated finished steel or unfinished aluminum.

Accessories

- Additional Inner Panels
- PJ Stainless Replacement Mounting Feet
- Terminal Kit Assemblies
- Hole Plugs

**New and improved PDF part
drawing files with more detail
now available.**

Click part number in table below
to access PDF, DXF, and STEP files.

| Lift Off Cover | Hinged Cover | No. | Enclosure | | | Optional Inner Panel | | |
|--------------------|--------------------|-------|-----------|-------|------|----------------------|-------|-------|
| 30.5mm PB Part No. | 30.5mm PB Part No. | Holes | H | W | D | Part No. | H | W |
| PJ664P4 | PJ664HP4 | 4 | 6.10 | 6.10 | 4.18 | 14R0505 | 4.88 | 4.88 |
| PJ864P6 | PJ864HP6 | 6 | 8.00 | 6.12 | 4.13 | 14R0705 | 6.75 | 4.88 |
| PJ1084P9 | PJ1084HP9 | 9 | 10.13 | 8.26 | 4.13 | 14R0907 | 8.75 | 6.88 |
| PJ1086P9 | PJ1086HP9 | 9 | 10.13 | 8.26 | 6.13 | 14R0907 | 8.75 | 6.88 |
| PJ1086P12 | PJ1086HP12 | 12 | 10.13 | 8.26 | 6.13 | 14R0907 | 8.75 | 6.88 |
| PJ12106P16 | PJ12106HP16 | 16 | 12.13 | 10.26 | 6.13 | 14R1109 | 10.75 | 8.88 |
| PJ12106P20 | PJ12106HP20 | 20 | 12.13 | 10.26 | 6.13 | 14R1109 | 10.75 | 8.88 |
| PJ14126P25 | PJ14126HP25 | 25 | 14.13 | 12.26 | 6.13 | 14R1311 | 12.75 | 10.88 |
| PJ16148P30 | PJ16148HP30 | 30 | 16.27 | 14.40 | 8.13 | 14R1513 | 14.75 | 12.88 |
| PJ18168P42 | PJ18168HP42 | 42 | 18.40 | 16.40 | 8.13 | P1868 | 16.88 | 14.88 |

Alternative inner panel options available.

Data subject to change without notice

© 2020. Hammond Manufacturing Ltd. All rights reserved.