
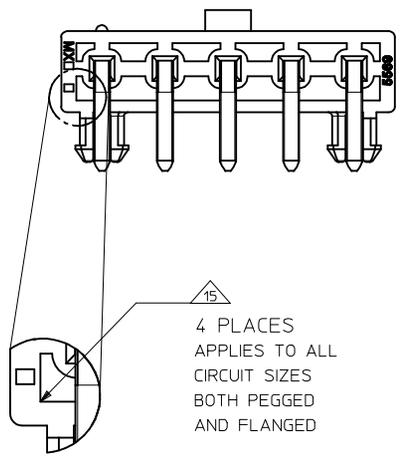
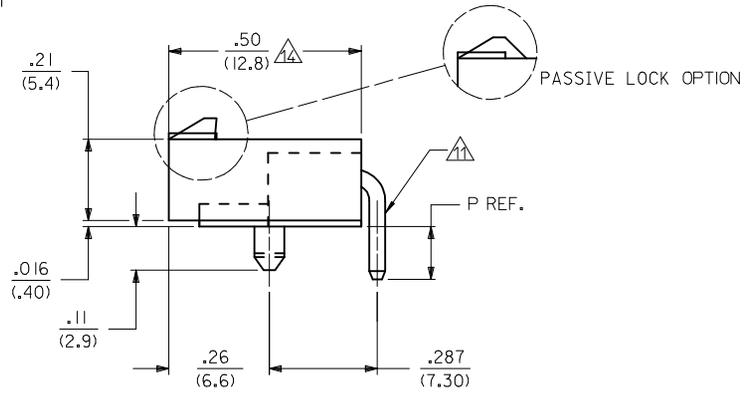


MATE FIRST BREAK LAST OPTION
SEE CHART FOR LOCATION


VOIDED CIRCUIT OPTION
SEE CHART FOR LOCATION

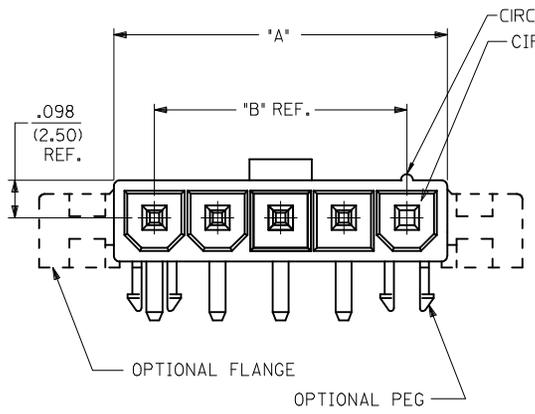


| CIRCUIT SIZE | DIM. "A" | DIM. "B" | DIM. "C" | DIM. "D" |
|--------------|------------------|-----------------|------------------|------------------|
| 2 | .378 (9.60) | .165 (4.20) | .772 (19.60) | .520 (13.20) |
| 3 | .543 (13.80) | .331 (8.40) | .937 (23.80) | .685 (17.40) |
| 4 | .709 (18.00) | .496 (12.60) | 1.102 (28.00) | .850 (21.60) |
| 5 | .874 (22.20) | .661 (16.80) | 1.268 (32.20) | 1.016 (25.80) |
| 6 | 1.039 (26.40) | .827 (21.00) | 1.433 (36.40) | 1.181 (30.00) |

- NOTES:
- MATERIAL:
 - HOUSING:
 - A - NYLON 6/6, UL 94V-2, LOW HALOGEN, COLOR: NATURAL
 - B - NYLON 6/6, UL 94V-0, LOW HALOGEN, COLOR: NATURAL
 - D - NYLON 6/6, UL 94V-0, LOW HALOGEN, COLOR: BLACK
 - TERMINALS: BRASS
 - FINISH (TERMINAL PLATING):
 - A - .000100/(0.00254) MIN. MATTE TIN OVER .000050/(0.00127) MIN. NICKEL OVERALL.
 - B - .000030/(0.00076) MIN. SELECT GOLD AND .000100/(0.00254) MIN. SELECT MATTE TIN OVER .000050/(0.00127) MIN. NICKEL OVERALL
 - PRODUCT SPECIFICATION: PS-5556-001
 - PACKAGING: BULK PACKAGED PER PK-5569-002
TRAY PACKAGED PER PK-5569-005
 - PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
 - MOUNTING OPTIONS:
 - 1 - PEGS
 - 2 - FLANGES
 - LOCK RAMP STYLES:
 - 1 - POSITIVE LOCK
 - 2 - PASSIVE LOCK
 - PARTS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - PART IS NOT DESIGNED FOR CURRENT SHARING.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - FORMING MARKS ARE ACCEPTABLE
 - DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
 - FOR 3 CKT PART NUMBERS, THIS DIMENSION IS .37/9.35
 - FOR 3 CKT PART NUMBERS, THIS DIMENSION IS .49/12.45
 - CORNER CORE-OUTS ARE OPTIONAL AND MAY OR MAY NOT BE PRESENT
 - TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.


| | | | | | | | | | | |
|--|--|---------------------------------------|--|--------------------------|--|---|------------------------|--|--|--|
| ADD 2 CKT VIEW EC NO: UCP2017-2789 DRWN: BAPPELDORN 2017/06/26 CHKD: J.BELL 2017/06/26 APPR: FSMITH 2017/06/28 | DESCRIPTION REV QUALITY SYMBOLS ▽=0 ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE 4:1 | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | | |
| | | mm | | INCH | | DRAWN BY POLGAR | DATE 1993/02/01 | TITLE MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | |
| | | 4 PLACES ±--- | | ±--- | | CHECKED BY FRY | DATE 1993/02/01 | | | |
| | | 2 PLACES ±0.38 | | ±--- | | APPROVED BY FSMITH | DATE 2011/06/21 | MOLEX MOLEX INCORPORATED DOCUMENT NO. SDA-43232-* SHEET NO. 1 OF 3 | | |
| 1 PLACE ±--- | | ±--- | | ANGULAR ±1/2° | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | |




2 CIRCUIT

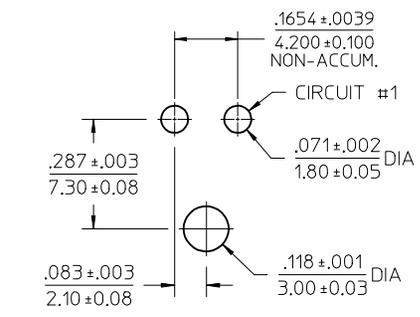

RECOMMENDED HOLE LAYOUT FOR
.070/ 1.78 MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE
2 CIRCUIT PART

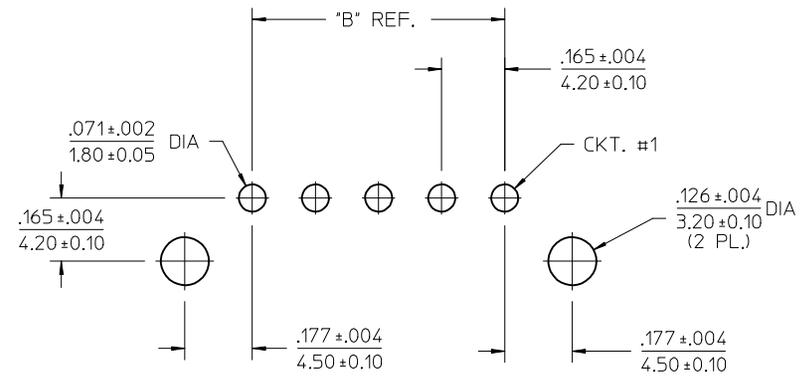

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(FLANGE MOUNT)

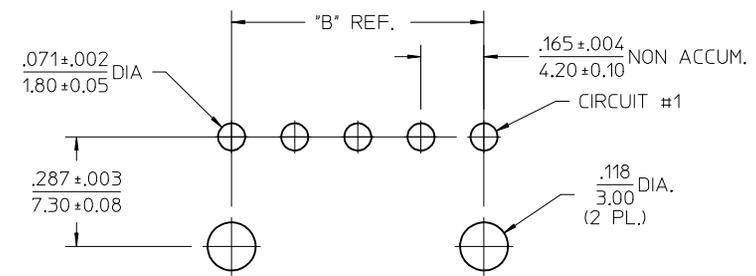

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(PEG MOUNT 3-12 CIRCUIT)

| | | | | | | | | | | | |
|---|------------|---|--|-----------------------|-----------------------------|---------------------|--------------------|------------------------|---|-----------------------------|---------------------|
| SEE SHEET 1 IEC NO: UCP2017-2789 DRWN:APPELDORN 2017/06/26 CHKD:JBELL 2017/06/26 APPR:FSMITH 2017/06/28 | REV C13 | DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE 4:1 | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | | |
| | | | 4 PLACES ± --- ± --- | 3 PLACES ± --- ± .015 | 2 PLACES ± 0.38 ± --- | 1 PLACE ± --- ± --- | DRAWN BY POLGAR | DATE 1993/02/01 | TITLE MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | |
| | | | ANGULAR ± 1/2° | | APPROVED BY FSMITH | DATE 2011/06/21 | MOLEX INCORPORATED | | | | |
| | | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | MATERIAL NO. SEE SHEET 3 | DATE | | | | DOCUMENT NO. SDA-43232-* | SHEET NO. 2 OF 3 |

| ITEM NO. | CKT. SIZE | CHARACTERISTIC DESCRIPTION | HOUSING OPTION | PLATING | LETTER INDICATES PIN OPTION AT EACH CKT.,. SEE NOTE 2 | | | | | | | | | | | | DIM P REF | PACKAGING |
|-----------|-----------|----------------------------|----------------|---------|---|----|----|----|----|---|---|---|---|----|----|----|-----------|-----------|
| | | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | | |
| 432320001 | 05 | 05A IA I | PEG | A | SA | SA | V | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320002 | 05 | 05A IA I | PEG | A | MA | SA | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320003 | 05 | 05B IA I | PEG | A | MA | SA | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320004 | 05 | 05B IA I | PEG | A | SA | V | SA | V | MA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320005 | 05 | 05A IA I | PEG | A | SA | V | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320006 | 05 | 05B IA I | PEG | A | SA | SA | SA | V | MA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320007 | 04 | 04B1A1 | PEG | A | SA | MA | MA | SA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320008 | 04 | 04B1A1 | PEG | A | MA | SA | SA | MA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320009 | 03 | 03B1A1 | PEG | A | SA | V | SA | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320010 | 03 | 03B1B1 | PEG | B | SB | V | SB | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320011 | 05 | 05B1B1 | PEG | B | SB | SB | V | SB | SB | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320012 | 05 | 05A1A1 | PEG | A | SA | SA | SA | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320013 | 03 | 03B1A1 | PEG | A | SA | SA | SA | - | - | - | - | - | - | - | - | - | .31/8.0 | TRAY |
| 432320014 | 05 | 05B1A1 | PEG | A | SA | SA | SA | SA | SA | - | - | - | - | - | - | - | .31/8.0 | TRAY |
| 432320016 | 05 | 05A1A1 | PEG | A | SA | V | V | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320017 | 04 | 04B1A1 | PEG | A | SA | V | V | SA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320018 | 04 | 04B1B1 | PEG | B | SB | V | V | SB | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320019 | 05 | 05B1A1 | PEG | A | SA | V | SA | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320020 | 03 | 03D1A1 | PEG | A | SA | V | SA | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320021 | 05 | 05B1A1 | PEG | A | SA | V | V | SA | V | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320022 | 03 | 03B1A1 | PEG | A | SA | SA | SA | - | - | - | - | - | - | - | - | - | .18/4.5 | BULK |

| CODE | PIN TYPE | PLATING |
|------|----------|-------------|
| SA | STANDARD | MATTE TIN |
| MA | MF/BL | MATTE TIN |
| SB | STANDARD | SELECT GOLD |
| MB | MF/BL | SELECT GOLD |
| V | VOID | |

CHARACTERISTICS LEGEND:

CIRCUIT SIZE _____ ** * * * *

(02-06)

HOUSING MATERIAL _____

A = NYLON 6/6, U.L. 94V-2,
COLOR: NATURAL

B = NYLON 6/6, U.L. 94V-0,
COLOR: NATURAL

D = NYLON 6/6, U.L. 94V-0,
COLOR: BLACK

MOUNTING OPTION _____

1 = PEGS
2 = FLANGES


PLATING COMBINATION _____

A = MATTE TIN OVER NICKEL
B = SELECT GOLD AND
SELECT MATTE TIN
OVER NICKEL OVERALL

LOCK RAMP STYLE _____




1 = POSITIVE LOCK
2 = PASSIVE LOCK

| | | | | | | |
|---|---------------------|---------------------------------------|--|--|--------------|------------------------|
| SEE SHEET 1 EC NO: UCP2017-2789 DRWN:APPELDORN 2017/06/26 CHKD:JBELL 2017/06/26 APPR:FSMITH 2017/06/28 REV: | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| | ▽=0 | mm INCH | IN/MM | 4:1 | METRIC | |
| | ▽=0 | 4 PLACES ± --- ± --- | DRAWN BY DATE | TITLE | | |
| | ▽=0 | 3 PLACES ± --- ± .015 | POLGAR 1993/02/01 | MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | |
| | ▽=0 | 2 PLACES ± 0.38 ± --- | CHECKED BY DATE | | | |
| | 1 PLACE ± --- ± --- | FRY 1993/02/01 | | | | |
| | 0 PLACE ± ± | APPROVED BY DATE | DOCUMENT NO. | | | |
| | | FSMITH 2011/06/21 | SDA-43232-* | | | |
| | | | SHEET NO. | | | |
| | | | 3 OF 3 | | | |
| | | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | |

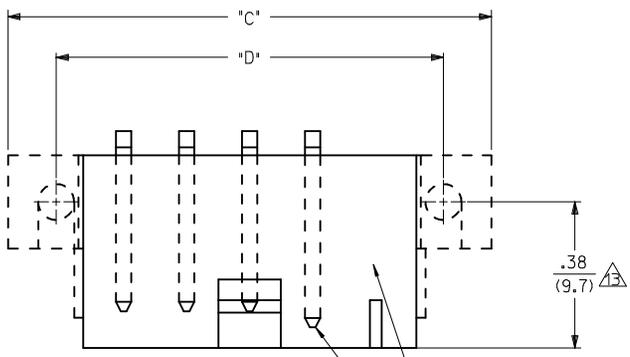

MATE FIRST BREAK LAST OPTION
SEE CHART FOR LOCATION

VOIDED CIRCUIT OPTION
SEE CHART FOR LOCATION

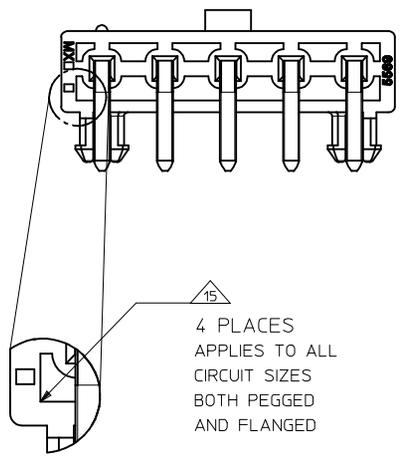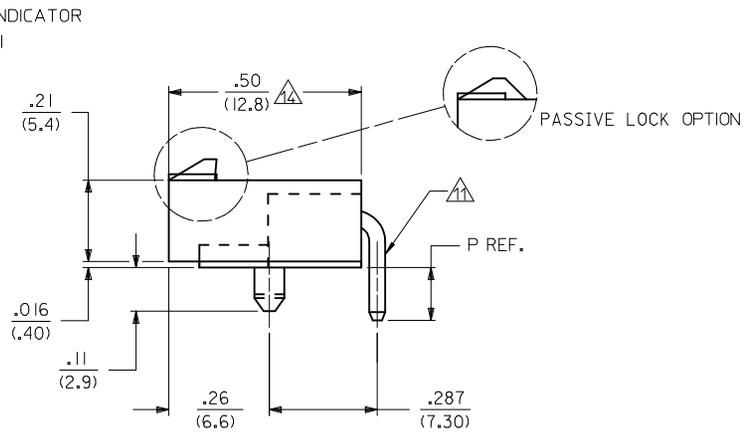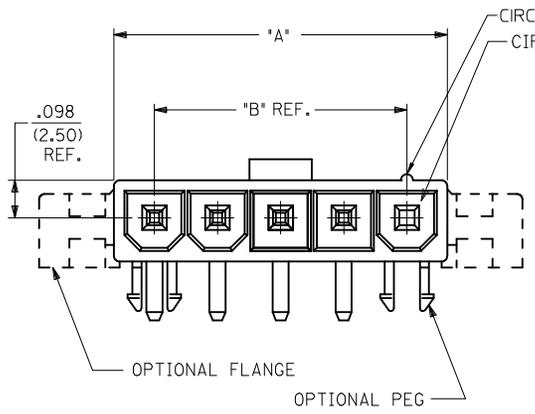


4 PLACES
APPLIES TO ALL
CIRCUIT SIZES
BOTH PEGGED
AND FLANGED


| CIRCUIT SIZE | DIM. "A" | DIM. "B" | DIM. "C" | DIM. "D" |
|--------------|------------------|-----------------|------------------|------------------|
| 2 | .378 (9.60) | .165 (4.20) | .772 (19.60) | .520 (13.20) |
| 3 | .543 (13.80) | .331 (8.40) | .937 (23.80) | .685 (17.40) |
| 4 | .709 (18.00) | .496 (12.60) | 1.102 (28.00) | .850 (21.60) |
| 5 | .874 (22.20) | .661 (16.80) | 1.268 (32.20) | 1.016 (25.80) |
| 6 | 1.039 (26.40) | .827 (21.00) | 1.433 (36.40) | 1.181 (30.00) |

- NOTES:
- MATERIAL:
 - HOUSING:
 - A - NYLON 6/6, UL 94V-2, LOW HALOGEN, COLOR: NATURAL
 - B - NYLON 6/6, UL 94V-0, LOW HALOGEN, COLOR: NATURAL
 - D - NYLON 6/6, UL 94V-0, LOW HALOGEN, COLOR: BLACK
 - TERMINALS: BRASS
 - FINISH (TERMINAL PLATING):
 - A - .000100/(0.00254) MIN. MATTE TIN OVER .000050/(0.00127) MIN. NICKEL OVERALL.
 - B - .000030/(0.00076) MIN. SELECT GOLD AND .000100/(0.00254) MIN. SELECT MATTE TIN OVER .000050/(0.00127) MIN. NICKEL OVERALL
 - PRODUCT SPECIFICATION: PS-5556-001
 - PACKAGING: BULK PACKAGED PER PK-5569-002
TRAY PACKAGED PER PK-5569-005
 - PART MATES WITH MINI-FIT JR. RECEPTACLE #5557.
 - MOUNTING OPTIONS:
 - 1 - PEGS
 - 2 - FLANGES
 - LOCK RAMP STYLES:
 - 1 - POSITIVE LOCK
 - 2- PASSIVE LOCK
 - PARTS ARE NOT TO BE MATED OR UNMATED WHILE CIRCUITS ARE LIVE.
 - PART IS NOT DESIGNED FOR CURRENT SHARING.
 - PART CONFORMS TO CLASS "B" REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.
 - FORMING MARKS ARE ACCEPTABLE
 - DISCOLORATION IN THE BANDOLIER CARRIER AREA OF THE PIN IS INHERENT TO THE PLATING PROCESS AND IS DUE TO THE MASKING EFFECT OF THE CARRIER. THIS DISCOLORATION IS IN A NON-FUNCTIONAL AREA OF THE PIN AND WILL NOT AFFECT THE PERFORMANCE OF THE HEADER ASSEMBLY.
 - FOR 3 CKT PART NUMBERS, THIS DIMENSION IS .37/9.35
 - FOR 3 CKT PART NUMBERS, THIS DIMENSION IS .49/12.45
 - CORNER CORE-OUTS ARE OPTIONAL AND MAY OR MAY NOT BE PRESENT
 - TEXT ON PART IS FOR REFERENCE ONLY. TEXT AND TEXT LOCATION MAY VARY DEPENDING ON PART NUMBER AND/OR TOOL.


| | | | | | | |
|--|--|--|--------------------------|--|--------------|------------------------|
| ADD 2 CKT VIEW EC NO: UCP2017-2789 DRWN: BAPPELDORN 2017/06/26 CHKD: J.BELL 2017/06/26 APPR: FSMITH 2017/06/28 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| | ▽=0 | mm INCH | IN/MM | 4:1 | METRIC | |
| | ▽=0 | 4 PLACES ± --- ± --- | DRAWN BY DATE | TITLE | | |
| | ▽=0 | 3 PLACES ± --- ± .015 | CHECKED BY DATE | MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | |
| ▽=0 | 2 PLACES ± 0.38 ± --- | APPROVED BY DATE | MOLEX MOLEX INCORPORATED | | | |
| | 1 PLACE ± --- ± --- | MATERIAL NO. | DOCUMENT NO. | | | |
| | ANGULAR ± 1/2° | SEE SHEET 3 | SDA-43232-* | | | |
| | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | |




2 CIRCUIT

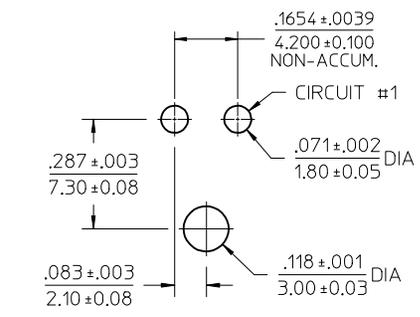

RECOMMENDED HOLE LAYOUT FOR
.070/ 1.78 MAX. THICK P.C. BOARD
VIEWED FROM COMPONENT SIDE
2 CIRCUIT PART

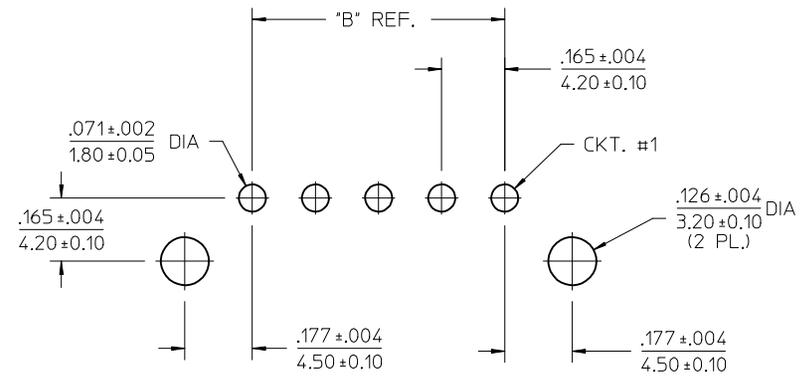

RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(FLANGE MOUNT)

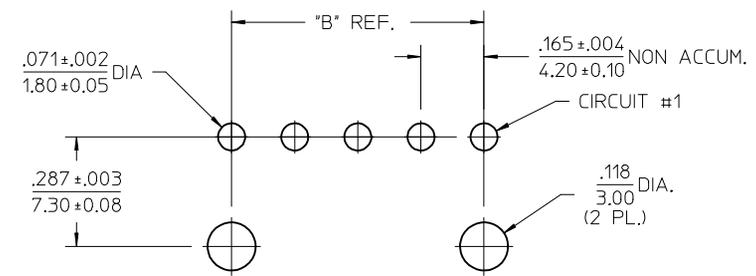


RECOMMENDED HOLE LAYOUT FOR
.070/(1.78) MAX. THICK P.C. BOARD.
VIEWED FROM COMPONENT SIDE
(PEG MOUNT 3-12 CIRCUIT)

| | | | | | | | | | | | | |
|--|------------|---|--|-----------------------|--------------------------|---------------------|-----------------------|------------------------|---|--|-----------------------------|---------------------|
| SEE SHEET 1 EC NO: UCP2017-2789 DRWN:APPELDORN 2017/06/26 CHKD:JBELL 2017/06/26 APPR:FSMITH 2017/06/28 | REV C13 | DESCRIPTION QUALITY SYMBOLS ▽=0 ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE IN/MM | | SCALE 4:1 | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | | | |
| | | | 4 PLACES ± --- ± --- | 3 PLACES ± --- ± .015 | 2 PLACES ± 0.38 ± --- | 1 PLACE ± --- ± --- | DRAWN BY POLGAR | DATE 1993/02/01 | TITLE MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | | |
| | | | ANGULAR ± 1/2° | | | | CHECKED BY FRY | DATE 1993/02/01 | | | | |
| | | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | APPROVED BY FSMITH | DATE 2011/06/21 | MATERIAL NO. SEE SHEET 3 | | DOCUMENT NO. SDA-43232-* | SHEET NO. 2 OF 3 |

| ITEM NO. | CKT. SIZE | CHARACTERISTIC DESCRIPTION | HOUSING OPTION | PLATING | LETTER INDICATES PIN OPTION AT EACH CKT.,. SEE NOTE 2 | | | | | | | | | | | | DIM P REF | PACKAGING |
|-----------|-----------|----------------------------|----------------|---------|---|----|----|----|----|---|---|---|---|----|----|----|-----------|-----------|
| | | | | | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | | |
| 432320001 | 05 | 05A IA I | PEG | A | SA | SA | V | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320002 | 05 | 05A IA I | PEG | A | MA | SA | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320003 | 05 | 05B IA I | PEG | A | MA | SA | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320004 | 05 | 05B IA I | PEG | A | SA | V | SA | V | MA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320005 | 05 | 05A IA I | PEG | A | SA | V | SA | SA | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320006 | 05 | 05B IA I | PEG | A | SA | SA | SA | V | MA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320007 | 04 | 04B1A1 | PEG | A | SA | MA | MA | SA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320008 | 04 | 04B1A1 | PEG | A | MA | SA | SA | MA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320009 | 03 | 03B1A1 | PEG | A | SA | V | SA | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320010 | 03 | 03B1B1 | PEG | B | SB | V | SB | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320011 | 05 | 05B1B1 | PEG | B | SB | SB | V | SB | SB | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320012 | 05 | 05A1A1 | PEG | A | SA | SA | SA | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320013 | 03 | 03B1A1 | PEG | A | SA | SA | SA | - | - | - | - | - | - | - | - | - | .31/8.0 | TRAY |
| 432320014 | 05 | 05B1A1 | PEG | A | SA | SA | SA | SA | SA | - | - | - | - | - | - | - | .31/8.0 | TRAY |
| 432320016 | 05 | 05A1A1 | PEG | A | SA | V | V | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320017 | 04 | 04B1A1 | PEG | A | SA | V | V | SA | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320018 | 04 | 04B1B1 | PEG | B | SB | V | V | SB | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320019 | 05 | 05B1A1 | PEG | A | SA | V | SA | V | SA | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320020 | 03 | 03D1A1 | PEG | A | SA | V | SA | - | - | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320021 | 05 | 05B1A1 | PEG | A | SA | V | V | SA | V | - | - | - | - | - | - | - | .138/3.50 | BULK |
| 432320022 | 03 | 03B1A1 | PEG | A | SA | SA | SA | - | - | - | - | - | - | - | - | - | .18/4.5 | BULK |

| CODE | PIN TYPE | PLATING |
|------|----------|-------------|
| SA | STANDARD | MATTE TIN |
| MA | MF/BL | MATTE TIN |
| SB | STANDARD | SELECT GOLD |
| MB | MF/BL | SELECT GOLD |
| V | VOID | |

CHARACTERISTICS LEGEND:

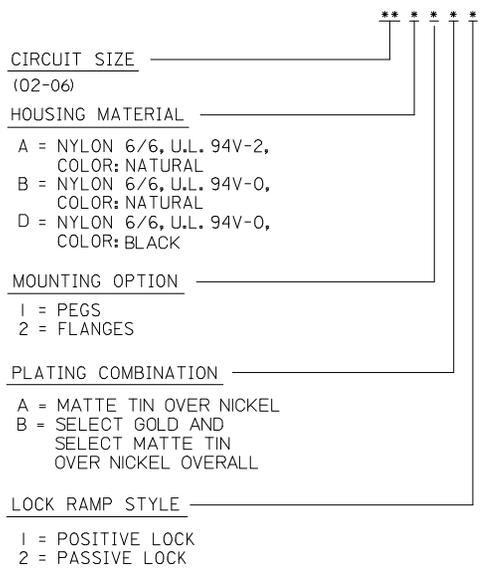

| | | | | | | |
|---|-----------------------|---------------------------------------|--|--|--------------|------------------------|
| SEE SHEET 1 EC NO: UCP2017-2789 DRWN:APPELDORN 2017/06/26 CHKD:JBELL 2017/06/26 APPR:FSMITH 2017/06/28 | QUALITY SYMBOLS | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE | SCALE | DESIGN UNITS | THIRD ANGLE PROJECTION |
| | ▽=0 | mm INCH | IN/MM | 4:1 | METRIC | |
| | ▽=0 | 4 PLACES ± --- ± --- | DRAWN BY DATE | TITLE | | |
| | ▽=0 | 3 PLACES ± --- ±.015 | POLGAR 1993/02/01 | MINI-FIT JR. SINGLE ROW HEADER WITH MF/BL AND VOIDED CIRCUITS OPTION | | |
| | 2 PLACES ± 0.38 ± --- | CHECKED BY DATE | <div style="text-align: center;">molex</div> | | | |
| | 1 PLACE ± --- ± --- | FRY 1993/02/01 | | | | |
| | 0 PLACE ± ± | APPROVED BY DATE | MATERIAL NO. DOCUMENT NO. SHEET NO. SEE CHART SDA-43232-* 3 OF 3 | | | |
| | | FSMITH 2011/06/21 | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[43232-0006](#)