

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

Type 418P Orange Drop[®] Round Profile Polyester Film/Foil Capacitors

Features

- Radial-lead. Round profile.
- Non-inductively wound, extended foil construction.
- Ratings up to 1000 Volts DC.



Specifications

Capacitance Range:

.001 to 1.0 μF

Capacitance Tolerance:

$\pm 5\%$, $\pm 10\%$, $\pm 20\%$

Voltage Ratings:

100 to 1000 Volts DC

Operating Temperature Range:

-55°C to $+85^{\circ}\text{C}$ (at full voltage)

Voltage Derating:

At $+105^{\circ}\text{C}$, 70% of $+85^{\circ}\text{C}$ rating.

At $+125^{\circ}\text{C}$, 50% of $+85^{\circ}\text{C}$ rating.

Lead Wire:

Tinned copper-clad steel,
.032 (0.8) diameter, #20 AWG

Insulation Resistance:

At $+25^{\circ}\text{C}$: 100,000 $\text{M}\Omega$ for $C \leq .25 \mu\text{F}$

25,000 $\text{M}\Omega\text{-}\mu\text{F}$ for $C > .25 \mu\text{F}$

At $+85^{\circ}\text{C}$: 10,000 $\text{M}\Omega$ for $C \leq .15 \mu\text{F}$

1,500 $\text{M}\Omega\text{-}\mu\text{F}$ for $C > .15 \mu\text{F}$

At $+105^{\circ}\text{C}$: 1,500 $\text{M}\Omega$ for $C \leq .17 \mu\text{F}$

250 $\text{M}\Omega\text{-}\mu\text{F}$ for $C > .17 \mu\text{F}$

At $+125^{\circ}\text{C}$: 200 $\text{M}\Omega$ for $C \leq .13 \mu\text{F}$

25 $\text{M}\Omega\text{-}\mu\text{F}$ for $C > .13 \mu\text{F}$

Dissipation Factor:

0.75% Maximum @ 1 KHz, $+25^{\circ}\text{C}$

Encapsulation:

Conformal coating of orange, flame retardant epoxy. Meets UL94V-0 specifications.

Dielectric/Construction:

Polyester film, single section design.
Non-inductively wound with extended aluminum foil.

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

General Specifications

The Type 418P Orange Drop[®] is designed and manufactured for operation in a wide range of demanding environments and applications. Type 418P capacitors are wound from the most reliable polyester film and aluminum foil available and are protected by a rugged conformal coating of orange epoxy. They may be operated up to +125°C with proper derating.

The 418P series finds use in many commercial and industrial applications, from power supplies and audio amplifiers to welding equipment and ultrasonics.

Operating Temperature Range:

The standard operating temperature range for polyester film is -55°C to +85°C. The 418P may be operated at full voltage within this temperature range.

The 418P may be operated up to +105°C provided the DC working voltage is reduced to 70% of the +85°C rating (full rating), and up to +125°C with a 50% reduction from the +85°C rating (full rating).

For more specific details regarding operation above +85°C please contact our design engineering department.

The maximum operating temperature for the 418P polyester film capacitor is +125°C.

Dielectric Withstanding Voltage:

Units rated below 1000 VDC shall withstand a DC potential of 250% of rated voltage applied between terminals for not more than 5 seconds. Units rated at 1000 VDC shall withstand a DC potential of 200% of rated voltage applied between terminals for not more than 5 seconds.

Lead Bend Test:

After 3 consecutive 180° bends. No damage.


Humidity Testing:

Units subjected to 95% relative humidity for 72 hours with no voltage applied at +75°C. After 4 hours of drying minimum product of insulation resistance and capacitance shall be 5,000 MΩ-μF

DC Voltage Life Test:


500 hours at +85°C at 150% of rated voltage. After test; capacitance shall not have changed by more than ±5% of initial value, insulation resistance shall not have decreased by more than 50% of initial value and dissipation factor shall not have increased to more than 1.0%. In addition, there should be no open or short circuits, and no sign of visible damage.

Typical Temperature Characteristics:

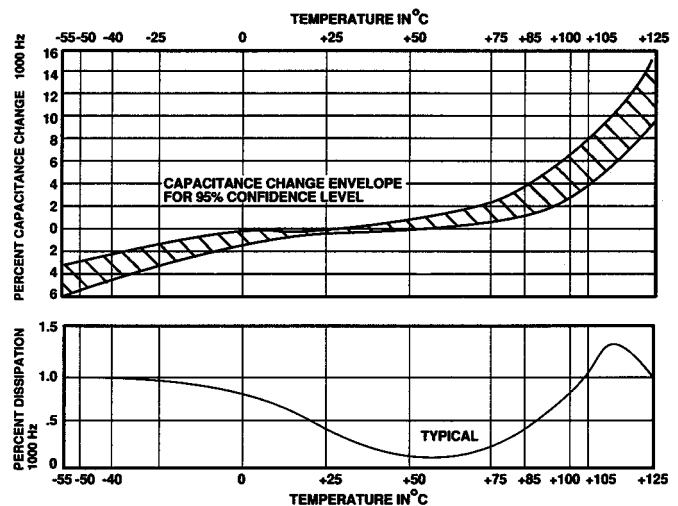

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

Ordering/Part Number Information

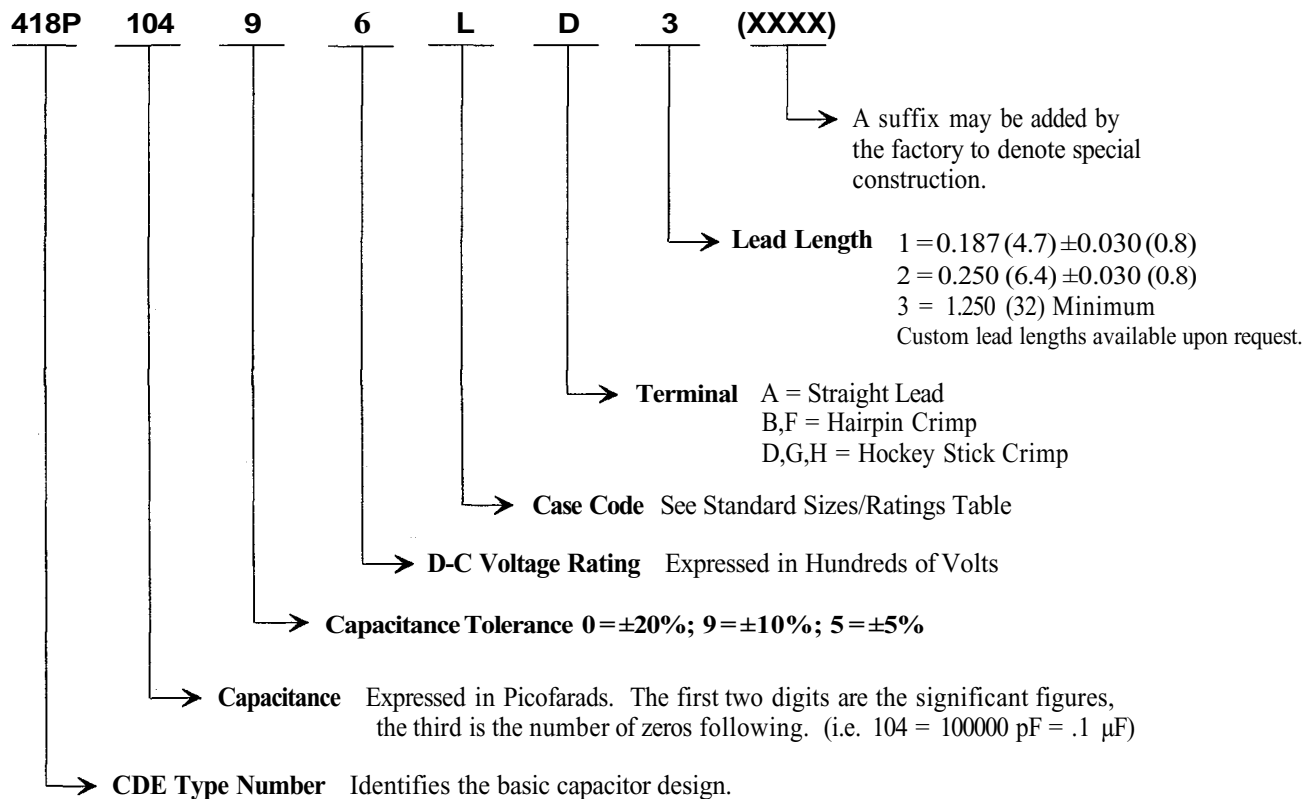

Standard Marking Format

Sample Marking on unit

CDE418P600V
104K 9810

Description


CDE - CDE Electronics identification
418P - Type number
600V - D-C Voltage rating, Volts
104K - Capacitance and tolerance code
9810 - Weekly date code
(i.e. 10th week of 1998)

Tolerance codes per EIA Standards

J $\pm 5\%$
K $\pm 10\%$
M $\pm 20\%$

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

Standard Lead Styles

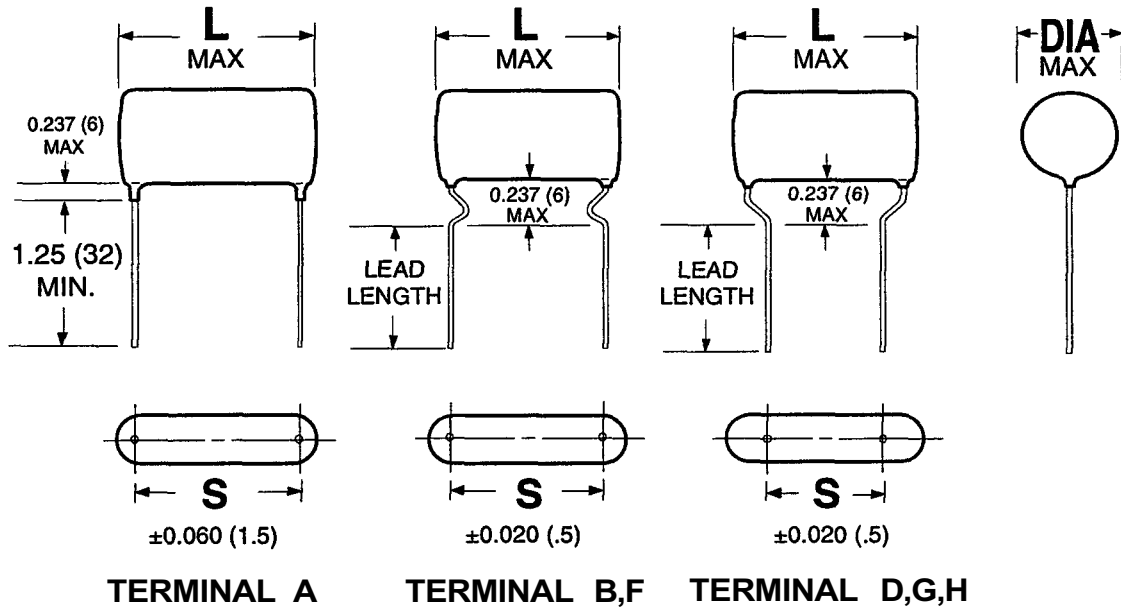

Standard Lead Spacings

| CASE CODE | S | | | | | |
|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| | Term. A | Term. B | Term. D | Term. F | Term. G | Term. H |
| J | 0.500 (12.7) | 0.500 (12.7) | 0.375 (9.5) | 0.394 (10) | 0.295 (7.5) | 0.197 (5) |
| K | 0.688 (17.5) | 0.688 (17.5) | 0.375 (9.5) | 0.590 (15) | 0.394 (10) | 0.295 (7.5) |
| L | 0.969 (24.6) | 0.969 (24.6) | 0.719 (18.3) | 0.886 (22.5) | 0.590 (15) | --- |
| M | 1.344 (34.1) | 1.344 (34.1) | 1.094 (27.8) | --- | 1.083 (27.5) | --- |

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

Type 418P Standard Sizes/Ratings²

| Value, μ F | Part Number ¹ | LMAX | DIA MAX | Value, μ F | Part Number ¹ | L MAX | DIA MAX |
|----------------|--------------------------|-------------|------------|----------------|--------------------------|-------------|------------|
| 100 VDC | | | | 400 VDC | | | |
| .027 | 418P27391J | .70 (17.8) | .35 (8.9) | .001 | 418P10294J | .70 (17.8) | .30 (7.6) |
| .033 | 418P33391J | .70 (17.8) | .35 (8.9) | .0012 | 418P12294J | .70 (17.8) | .30 (7.6) |
| .039 | 418P39391J | .70 (17.8) | .35 (8.9) | .0015 | 418P15294J | .70 (17.8) | .30 (7.6) |
| .047 | 418P47391J | .70 (17.8) | .35 (8.9) | .0018 | 418P18294J | .70 (17.8) | .30 (7.6) |
| .056 | 418P56391J | .70 (17.8) | .35 (8.9) | .0022 | 418P22294J | .70 (17.8) | .30 (7.6) |
| .068 | 418P68391J | .70 (17.8) | .35 (8.9) | .0027 | 418P27294J | .70 (17.8) | .30 (7.6) |
| .082 | 418P82391K | .90 (22.9) | .40 (10.2) | .0033 | 418P33294J | .70 (17.8) | .30 (7.6) |
| .1 | 418P10491K | .90 (22.9) | .40 (10.2) | .0039 | 418P39294J | .70 (17.8) | .30 (7.6) |
| .12 | 418P12491K | .90 (22.9) | .45 (11.4) | .0047 | 418P47294J | .70 (17.8) | .30 (7.6) |
| .15 | 418P15491K | .90 (22.9) | .45 (11.4) | .0056 | 418P56294J | .70 (17.8) | .33 (8.4) |
| .18 | 418P18491L | 1.20 (30.5) | .45 (11.4) | .0068 | 418P68294J | .70 (17.8) | .33 (8.4) |
| .22 | 418P22491L | 1.20 (30.5) | .45 (11.4) | .0082 | 418P82294J | .70 (17.8) | .35 (8.9) |
| .27 | 418P27491L | 1.20 (30.5) | .50 (12.7) | .01 | 418P10394J | .70 (17.8) | .35 (8.9) |
| .33 | 418P33491L | 1.20 (30.5) | .50 (12.7) | .012 | 418P12394J | .70 (17.8) | .35 (8.9) |
| .39 | 418P39491M | 1.60 (40.6) | .50 (12.7) | .015 | 418P15394J | .70 (17.8) | .38 (9.7) |
| .47 | 418P47491M | 1.60 (40.6) | .50 (12.7) | .018 | 418P18394K | .90 (22.9) | .38 (9.7) |
| .56 | 418P56491M | 1.60 (40.6) | .60 (15.2) | .022 | 418P22394K | .90 (22.9) | .38 (9.7) |
| .68 | 418P68491M | 1.60 (40.6) | .60 (15.2) | .027 | 418P27394K | .90 (22.9) | .40 (10.2) |
| .82 | 418P82491M | 1.60 (40.6) | .65 (16.5) | .033 | 418P33394K | .90 (22.9) | .40 (10.2) |
| 1.0 | 418P10591M | 1.60 (40.6) | .70 (17.8) | .039 | 418P39394L | 1.20 (30.5) | .40 (10.2) |
| 200 VDC | | | | .047 | 418P47394L | 1.20 (30.5) | .40 (10.2) |
| .0056 | 418P56292J | .70 (17.8) | .33 (8.4) | .056 | 418P56394L | 1.20 (30.5) | .45 (11.4) |
| .0068 | 418P68292J | .70 (17.8) | .33 (8.4) | .068 | 418P68394L | 1.20 (30.5) | .45 (11.4) |
| .0082 | 418P82292J | .70 (17.8) | .33 (8.4) | .082 | 418P82394L | 1.20 (30.5) | .52 (13.2) |
| .01 | 418P10392J | .70 (17.8) | .33 (8.4) | .1 | 418P10494L | 1.20 (30.5) | .52 (13.2) |
| .012 | 418P12392J | .70 (17.8) | .33 (8.4) | .12 | 418P12494L | 1.20 (30.5) | .55 (14.0) |
| .015 | 418P15392J | .70 (17.8) | .33 (8.4) | .15 | 418P15494L | 1.20 (30.5) | .57 (14.5) |
| .018 | 418P18392J | .70 (17.8) | .33 (8.4) | .18 | 418P18494M | 1.60 (40.6) | .60 (15.2) |
| .022 | 418P22392J | .70 (17.8) | .33 (8.4) | .22 | 418P22494M | 1.60 (40.6) | .60 (15.2) |
| .027 | 418P27392J | .70 (17.8) | .35 (8.9) | .27 | 418P27494M | 1.60 (40.6) | .65 (16.5) |
| .033 | 418P33392K | .90 (22.9) | .38 (9.7) | .33 | 418P33494M | 1.60 (40.6) | .65 (16.5) |
| .039 | 418P39392K | .90 (22.9) | .38 (9.7) | .39 | 418P39494M | 1.60 (40.6) | .72 (18.3) |
| .047 | 418P47392K | .90 (22.9) | .38 (9.7) | .47 | 418P47494M | 1.60 (40.6) | .80 (20.3) |
| .056 | 418P56392L | 1.20 (30.5) | .38 (9.7) | | | | |
| .068 | 418P68392L | 1.20 (30.5) | .38 (9.7) | | | | |
| .082 | 418P82392L | 1.20 (30.5) | .40 (10.2) | | | | |
| .1 | 418P10492L | 1.20 (30.5) | .40 (10.2) | | | | |
| .12 | 418P12492L | 1.20 (30.5) | .45 (11.4) | | | | |
| .15 | 418P15492L | 1.20 (30.5) | .45 (11.4) | | | | |
| .18 | 418P18492L | 1.20 (30.5) | .50 (12.7) | | | | |
| .22 | 418P22492L | 1.20 (30.5) | .50 (12.7) | | | | |
| .27 | 418P27492M | 1.60 (40.6) | .47 (11.9) | | | | |
| .33 | 418P33492M | 1.60 (40.6) | .47 (11.9) | | | | |
| .39 | 418P39492M | 1.60 (40.6) | .50 (12.7) | | | | |
| .47 | 418P47492M | 1.60 (40.6) | .55 (14.0) | | | | |

1. To complete part number for specific tolerance, terminal style and lead length please refer to Ordering/Part Number Information

² page. The 418P series is available through the CDE Distribution Network on special order.

Dimensions in inches, metric (mm) in parenthesis.

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

Type 418P Standard Sizes/Ratings²

| Value, μ F | Part Number ¹ | LMAX | DIA MAX | Value, μ F | Part Number ¹ | L MAX | DIA MAX |
|----------------|--------------------------|-------------|------------|-----------------|--------------------------|-------------|------------|
| 600 VDC | | | | 1000 VDC | | | |
| .001 | 418P10296J | .70 (17.8) | .30 (7.6) | .001 | 418P102910J | .70 (17.8) | .33 (8.4) |
| .0012 | 418P12296J | .70 (17.8) | .33 (8.4) | .0012 | 418P122910J | .70 (17.8) | .33 (8.4) |
| .0015 | 418P15296J | .70 (17.8) | .33 (8.4) | .0015 | 418P152910J | .70 (17.8) | .33 (8.4) |
| .0018 | 418P18296J | .70 (17.8) | .33 (8.4) | .0018 | 418P182910J | .70 (17.8) | .35 (8.9) |
| .0022 | 418P22296J | .70 (17.8) | .33 (8.4) | .0022 | 418P222910J | .70 (17.8) | .35 (8.9) |
| .0027 | 418P27296J | .70 (17.8) | .35 (8.9) | .0027 | 418P272910K | .90 (22.9) | .35 (8.9) |
| .0033 | 418P33296J | .70 (17.8) | .35 (8.9) | .0033 | 418P332910K | .90 (22.9) | .35 (8.9) |
| .0039 | 418P39296J | .70 (17.8) | .38 (9.7) | .0039 | 418P392910K | .90 (22.9) | .38 (9.7) |
| .0047 | 418P47296J | .70 (17.8) | .38 (9.7) | .0047 | 418P472910K | .90 (22.9) | .40 (10.2) |
| .0056 | 418P56296J | .70 (17.8) | .40 (10.2) | .0056 | 418P562910K | .90 (22.9) | .43 (10.9) |
| .0068 | 418P68296J | .70 (17.8) | .40 (10.2) | .0068 | 418P682910K | .90 (22.9) | .43 (10.9) |
| .0082 | 418P82296K | .90 (22.9) | .40 (10.2) | .0082 | 418P822910K | .90 (22.9) | .48 (12.2) |
| .01 | 418P10396K | .90 (22.9) | .40 (10.2) | .01 | 418P103910K | .90 (22.9) | .48 (12.2) |
| .012 | 418P12396K | .90 (22.9) | .40 (10.2) | .012 | 418P123910L | 1.20 (30.5) | .48 (12.2) |
| .015 | 418P15396K | .90 (22.9) | .40 (10.2) | .015 | 418P153910L | 1.20 (30.5) | .48 (12.2) |
| .018 | 418P18396K | .90 (22.9) | .45 (11.4) | .018 | 418P183910L | 1.20 (30.5) | .58 (14.7) |
| .022 | 418P22396K | .90 (22.9) | .45 (11.4) | .022 | 418P223910L | 1.20 (30.5) | .58 (14.7) |
| .027 | 418P27396L | 1.20 (30.5) | .45 (11.4) | .027 | 418P273910L | 1.20 (30.5) | .65 (16.5) |
| .033 | 418P33396L | 1.20 (30.5) | .45 (11.4) | .033 | 418P333910L | 1.20 (30.5) | .65 (16.5) |
| .039 | 418P39396L | 1.20 (30.5) | .55 (14.0) | .039 | 418P393910M | 1.60 (40.6) | .65 (16.5) |
| .047 | 418P47396L | 1.20 (30.5) | .55 (14.0) | .047 | 418P473910M | 1.60 (40.6) | .65 (16.5) |
| .056 | 418P56396L | 1.20 (30.5) | .60 (15.2) | .056 | 418P563910M | 1.60 (40.6) | .75 (19.1) |
| .068 | 418P68396L | 1.20 (30.5) | .60 (15.2) | .068 | 418P683910M | 1.60 (40.6) | .75 (19.1) |
| .082 | 418P82396L | 1.20 (30.5) | .65 (16.5) | .082 | 418P823910M | 1.60 (40.6) | .85 (21.6) |
| .1 | 418P10496L | 1.20 (30.5) | .65 (16.5) | .1 | 418P104910M | 1.60 (40.6) | .85 (21.6) |
| .12 | 418P12496M | 1.60 (40.6) | .70 (17.8) | | | | |
| .15 | 418P15496M | 1.60 (40.6) | .70 (17.8) | | | | |
| .18 | 418P18496M | 1.60 (40.6) | .80 (20.3) | | | | |
| .22 | 418P22496M | 1.60 (40.6) | .80 (20.3) | | | | |
| .25 | 418P25496M | 1.60 (40.6) | .80 (20.3) | | | | |

¹ To complete part number for specific tolerance, terminal style and lead length please refer to Ordering/Part Number Information page.

² The 418P series is available through the CDE Distribution Network on special order.

Dimensions in inches, metric (mm) in parenthesis.

Type 418P, Orange Drop[®], Polyester Film/Foil Capacitors

dV/dt Specifications

Maximum Pulse Rise Time (dV/dt) in Volts/μsec

| Cap Value (μF) | 100V | 200V | 400V | 600V | 1000V |
|----------------|------|------|-------|-------|-------|
| .001 | | | | 22100 | 22700 |
| .0012 | | | | 20200 | 20800 |
| .0015 | | | | 18100 | 18600 |
| .0018 | | | | 16500 | 17000 |
| .0022 | | | | 14900 | 15300 |
| .0027 | | | | 13500 | 13800 |
| .0033 | | | 11000 | 12200 | 12500 |
| .0039 | | | 10100 | 11200 | 11500 |
| .0047 | | | 9200 | 10200 | 10500 |
| .0056 | | 5900 | 8400 | 9300 | 9000 |
| .0068 | | 5400 | 7600 | 8500 | 8200 |
| .0082 | | 4900 | 6900 | 7200 | 7400 |
| .01 | | 4500 | 6300 | 6600 | 6700 |
| .012 | | 4100 | 5700 | 6000 | 5700 |
| .015 | | 3600 | 5100 | 5400 | 5100 |
| .018 | | 3300 | 4400 | 4900 | 4700 |
| .022 | | 3000 | 4000 | 4400 | 4200 |
| .027 | 2000 | 2700 | 3600 | 3700 | 3800 |
| .033 | 1800 | 2400 | 3200 | 3300 | 3400 |
| .039 | 1700 | 2100 | 2800 | 3100 | 2900 |
| .047 | 1500 | 1900 | 2500 | 2800 | 2700 |
| .056 | 1400 | 1800 | 2300 | 2600 | 2400 |
| .068 | 1300 | 1500 | 2100 | 2300 | 2200 |
| .082 | 1100 | 1400 | 1900 | 2100 | 2000 |
| .1 | 1000 | 1200 | 1700 | 1900 | 1800 |
| .12 | 900 | 1100 | 1600 | 1600 | |
| .15 | 800 | 1000 | 1400 | 1500 | |
| .18 | 700 | 900 | 1200 | 1300 | |
| .22 | 600 | 800 | 1100 | 1200 | |
| .25 | 600 | 800 | 1000 | 1100 | |
| .27 | 600 | 700 | 1000 | 1100 | |
| .33 | 500 | 600 | 900 | | |
| .39 | 400 | 600 | 800 | | |
| .47 | 400 | 500 | 700 | | |
| .56 | 400 | | | | |
| .68 | 300 | | | | |
| .82 | 300 | | | | |
| 1.0 | 300 | | | | |

Note: dV/dt ratings based on measurements made at the junction of the wire leads and capacitor body

Dimensions in inches, metric (mm) in parenthesis.

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cornell Dubilier:

[418P25496MB3](#) [418P27492MA3](#) [418P47492MB2](#) [418P47494MB2](#) [418P22492LD3](#) [418P22296JB2](#)
[418P104910MA2](#) [418P10496LB3](#) [418P10496LBM105](#) [418P50396LBM105](#) [418P47394LB2](#) [418P15392JA3](#)
[418P10492LB2](#) [418P10396KB2](#) [418P102910JB2](#) [418P10496LB2](#) [418P33396LB2](#) [418P33492MD3](#)