

THIS COPY IS PROVIDED ON	A RESTRICTED BASIS AND IS NOT TO BE U	JSED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.			
Material	High Conductivity Seamless Copper Tube				
Plating	Electro-Tin	.60 R Ref			
Wire Size	1/0 AWG] / /			
Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric				
Wire Strip Length	1.0 in.	PANDUIT PANDUI			
Stud Size	1/2 in.	80±.04 Z + + + + + + + + + + + + + + + + + +			
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.47±.04 .53±.02 DIA			
UL Temperature Rating	90°C	2.31±.06			
C.S.A Certified Wire Connector	Yes	2.51±.00			
Panduit Color Code on Barrel	PINK				
Panduit Die Index No. on Barrel	P42	.94			
Alternate Industry Die Index No. () on Barrel	(12)	Wire inspection window—			





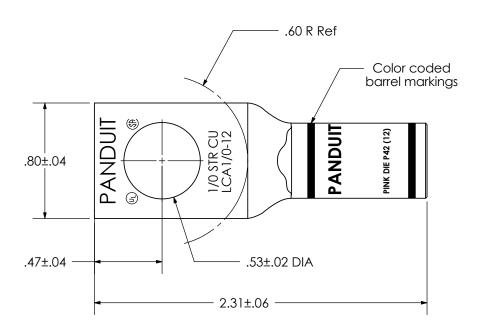

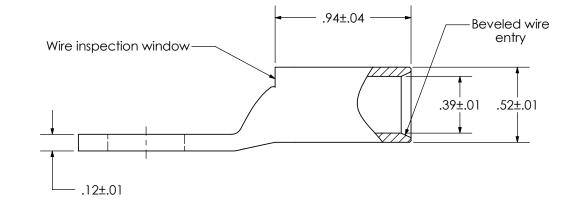

Wire Connector

						PANDUIT CORP. TINLEY PARK, ILLINOIS
						LCA1/0-12-X Copper Lug - One-Hole, Standard Barrel
01	1/08	DRL	DRL	removed navy number from Stamp		Copper Lug - One-Hole, Standard Barrel
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A DRAWING NO / CAD FILE LCA1_0-12-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit: LCA1/0-12-X