


## CMD91-21/TR7, TR9, TR10 Series SMT LEDs

### Description and Features

All dimensions in mm.

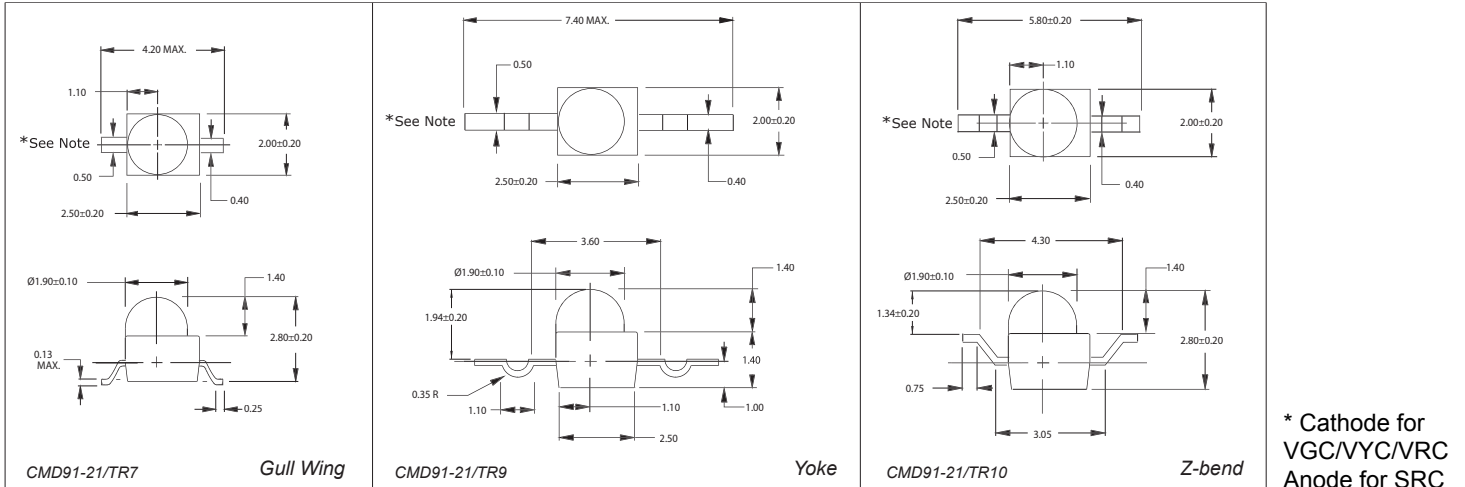

#### Surface Mount Technology

- Tape and reel packaged for high-speed autoinsertion.
- Convection and vapor-phase reflow compatible.
- Compact form enables high density placement.
- RoHS Compliant

#### Leading Edge LED Optoelectronic Performance

- Consistent high brightness.
- Gull wing, Yoke or Z-bend lead configuration.

#### Exceptional Reliability

- Stringent process controls assure quality.
- Extensive qualification testing to meet strictest requirements.
- Designed to permit easy post-reflow solder joint inspection.

## Electro-Optical Characteristics

Part Number	Emitted Color	Lens Color	Luminous Intensity@20Ma		Forward Voltage		Viewing Angle (degrees)	Peak Wavelength (nm)
			Min. (mcd)	Typ. (mcd)	Typ. (V)	Max. (V)		
CMD91-21VGC/TR7/TR9/TR10	Green	Clear	30.0	50.0	2.1	2.8	25	565
CMD91-21VYC/TR7/-/TR10	Yellow	Clear	18.0	30.0	2.0	2.8	25	585
CMD91-21VRC/TR7/-/TR10	H.E. Red	Clear	48.0	80.0	2.0	2.8	25	640
CMD91-21SRC/TR7	Red	Clear	113.0	170.0	1.7	2.4	25	660

## Absolute Maximum Ratings

	Green	H.E.Red	Yellow	Red	Units
Power Dissipation.....	105.....	105.....	105.....	100.....	mW
Storage/Operating Temperature.....	-40 to +85.....	-40 to +85.....	-40 to +85.....	-40 to +85.....	°C
Peak Forward Current (1µs @ 10% duty cycle).....	150.....	150.....	150.....	150.....	mA
Reverse Voltage (IR=100µA).....	4.0.....	4.0.....	4.0.....	4.0.....	V
Lead Solder Time @ 260°C.....	5.....	5.....	5.....	5.....	Seconds
Average Forward Current.....	25.....	30.....	30.....	30.....	mA

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

VCC:

[CMD91-21SRC/TR7](#) [CMD91-21VGC/TR7](#) [CMD91-21VYC/TR7](#) [CMD9121VGCTR10](#) [CMD9121VRC/TR10](#)  
[CMD9121VYC/TR10](#)