

Glass Passivated Bridge Rectifiers

MB05M-G thru MB10M-G

"-G" : RoHS Device

REVERSE VOLTAGE - 50 to 1000 V


FORWARD CURRENT - 0.8 A

FEATURES

- Rating to 1000V PRV
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- Lead tin plated copper

MECHANICAL DATA

- Polarity: Symbol molded on body
- Weight: 0.0044 ounces, 0.125 grams
- Mounting position :Any

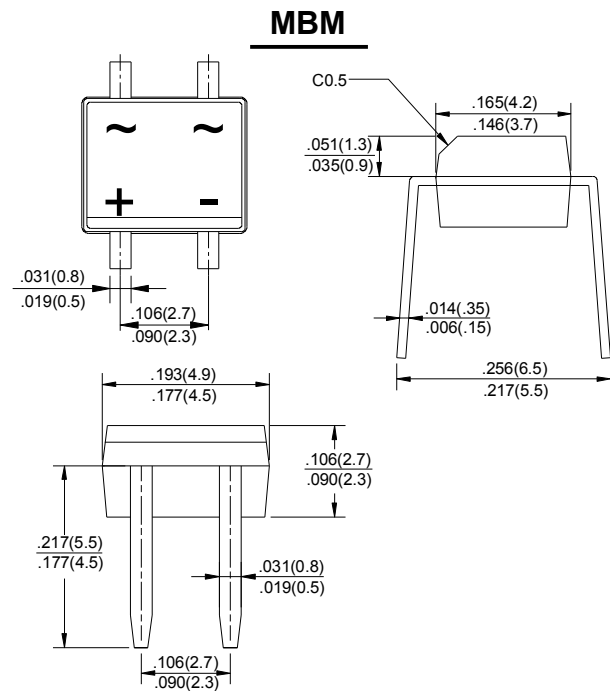

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	MB05M	MB1M	MB2M	MB4M	MB6M	MB8M	MB10M	UNIT
Maximum Recurrent Peak Reverse Voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	VDC	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current (Note 1) @TA=40 °C	I(AV)	0.8							A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load(JEDEC Method)	IFSM	30							A
Peak Forward Voltage at 0.8A DC	VF	1.1							V
Maximum DC Reverse Current @TJ=25°C at Rated DC Bolcking Voltage @TJ=125°C	IR	5.0 500							µA
Typical Junction Capacitance Per Element (Note2)	CJ	15							pF
Typical Thermal Resistance (Note3)	RθJC	75							°C/W
Operating Temperature Range	TJ	-55 to +150							°C
Storage Temperature Range	TSTG	-55 to +150							°C

NOTES:1.Mounted on P.C. board.

2.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3.Thermal resistance junction to case.

RATINGS AND CHARACTERISTIC CURVES MB05M-G thru MB10M-G

FIG.1-FORWARD CURRENT DERATING CURVE

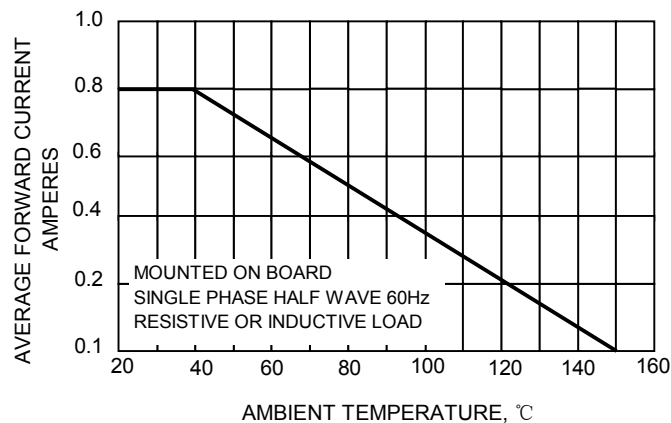


FIG.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

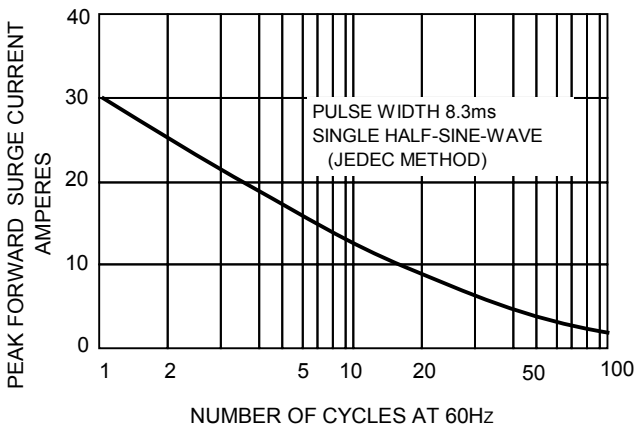


FIG.3-TYPICAL REVERSE CHARACTERISTICS

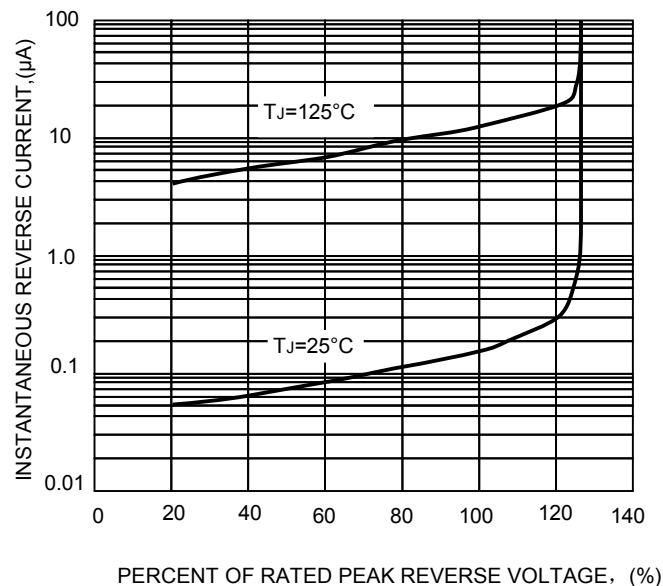


FIG.4-TYPICAL FORWARD CHARACTERISTICS


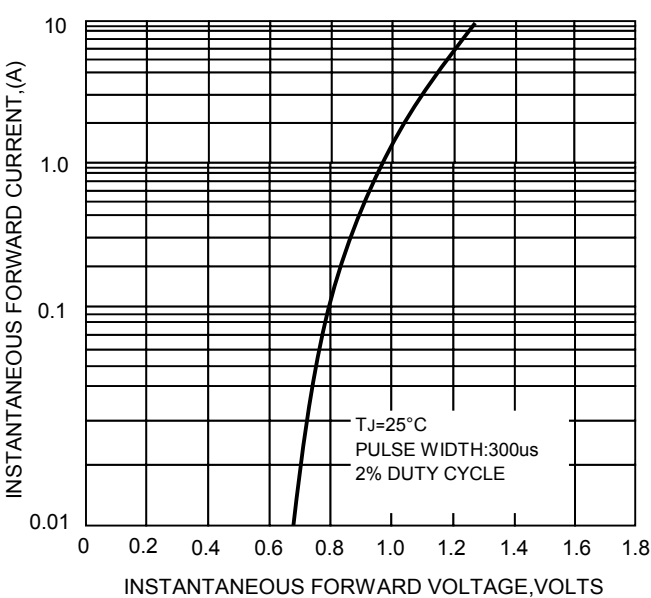


FIG.5-TYPICAL JUNCTION CAPACITANCE

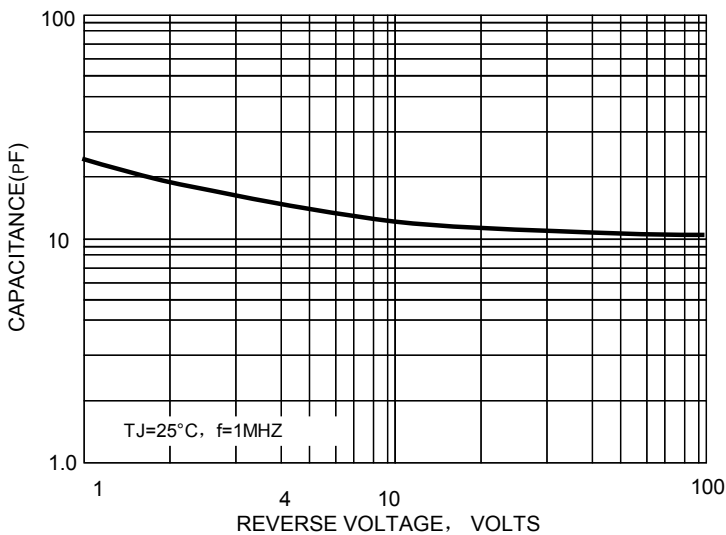

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[MB05M-G](#) [MB10M-G](#) [MB4M-G](#) [MB6M-G](#)