




SIZE	A DIM	B DIM	C DIM	D DIM	E DIM ±.002	(L DIM)
05	.470	.233	.310	.620	.315	(.100)
09	.570	.333	.410	.720	.415	(.200)
15	.720	.483	.560	.870	.565	(.350)
25	.970	.733	.810	1.120	.815	(.600)
37	1.270	1.033	1.110	1.420	1.115	(.900)
51	1.620	1.383	1.460	1.770	1.465	(1.250)

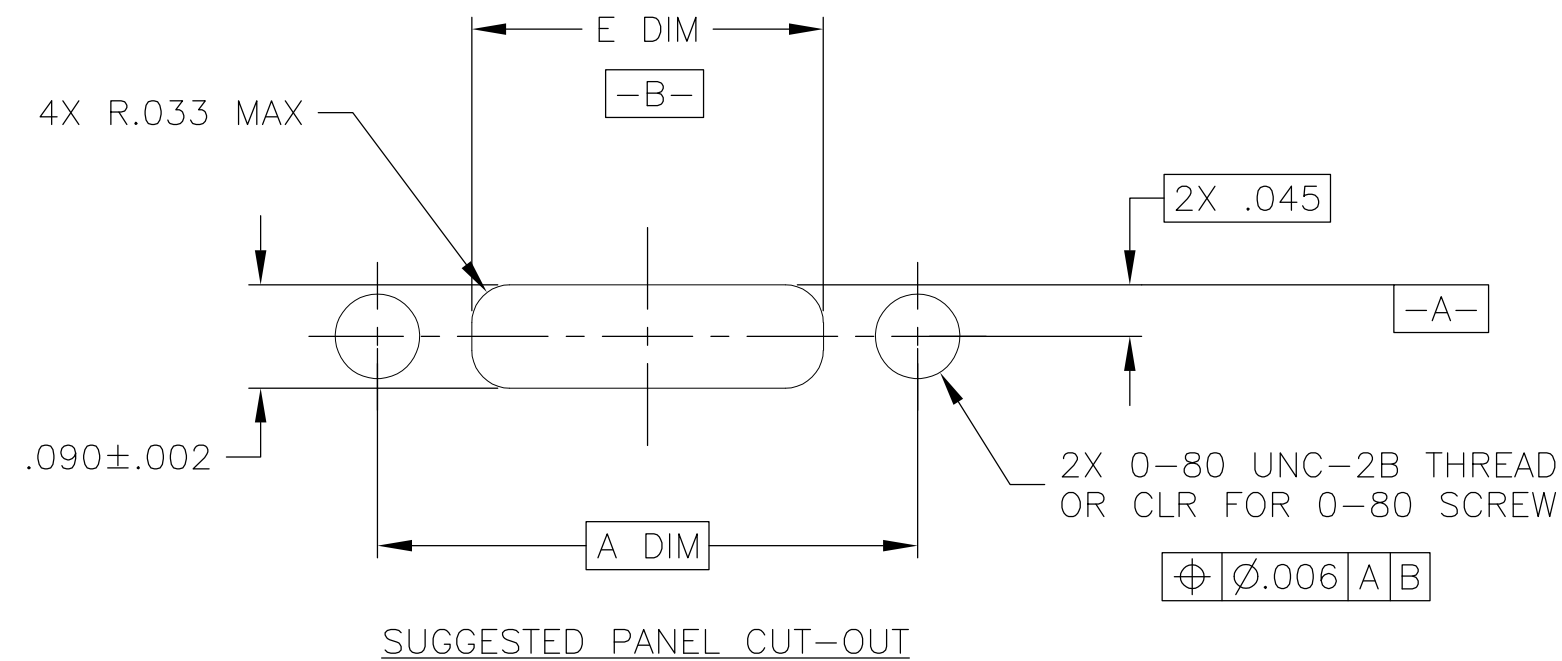

- 1 SHELL OPTIONS (TO BE SPECIFIED IN NANONICS PART NUMBER):  
6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 (STANDARD) OR GOLD PLATED PER ASTM B488;  
OR 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-2700  
INSULATOR MATERIAL IS LIQUID CRYSTAL POLYMER (LCP) PER MIL-M-24519 OR PER ASTM D5138
- 2 STANDARD 1.0 X 0.25mm JACKSCREW THREADS ARE SHOWN FOR REFERENCE ONLY AND MUST BE SPECIFIED IN THE  
NANONICS PART NUMBER WHEN REQUIRED. 1.2 X 0.25mm THREADS ALSO AVAILABLE.
- 3 THIS CONFIGURATION MAY BE TERMINATED WITH 28 AWG SOLID, 30 AWG STRANDED OR SMALLER WIRE, OR RIBBON CABLE.  
CONDUCTOR TYPE AND LENGTH MUST BE SPECIFIED IN NANONICS PART NUMBER.
- 4 THIS DRAWING PREVIOUSLY IDENTIFIED AS NANONICS 303-0010-XX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. SCHOLL 14 APR 04		 Tyco Electronics Corporation Harrisburg, PA 17105-3608					
		CHK M. STORRY 14 APR 04							
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME  RECEPTACLE ASSEMBLY, PANEL MOUNT, SINGLE ROW DUALOBE, FLYING LEAD, METAL SHELL					
		APVD —				SIZE A2			
		PRODUCT SPEC —						CAGE CODE 0PJN9	
		APPLICATION SPEC —							
MATERIAL		FINISH		RESTRICTED TO					
SEE NOTES		SEE NOTES		—					
CUSTOMER DRAWING				SCALE 6:1 SHEET 1 OF 1 REV B					

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[PSM009SC2DC024N](#)