

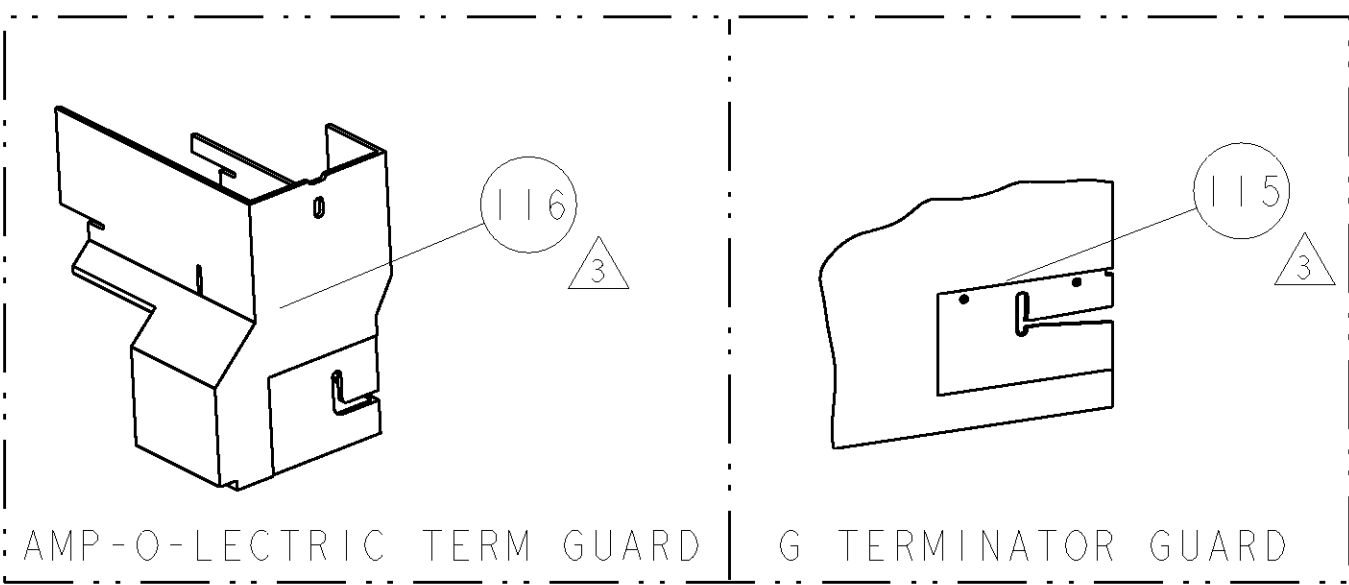


8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
20				20			
(C) COPYRIGHT 20				BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.			
PART NUMBER		REV	FIRST USED	POWER UNIT		FEED TYPE	DESCRIPTION
1852045-1		B	122500-1	LEADMAKER		POST FEED	CUTS CARRIER
1852045-2		B	565435-5	BENCH MODEL K		PRE FEED	CUTS CARRIER
1852045-3		B	354500-1	BENCH MODEL G		PRE FEED	CUTS CARRIER
1852045-6		B	122500-1	LEADMAKER		POST FEED	CONTINUOUS CARRIER
7-1852045-7		A	-	-		-	SPARE PARTS


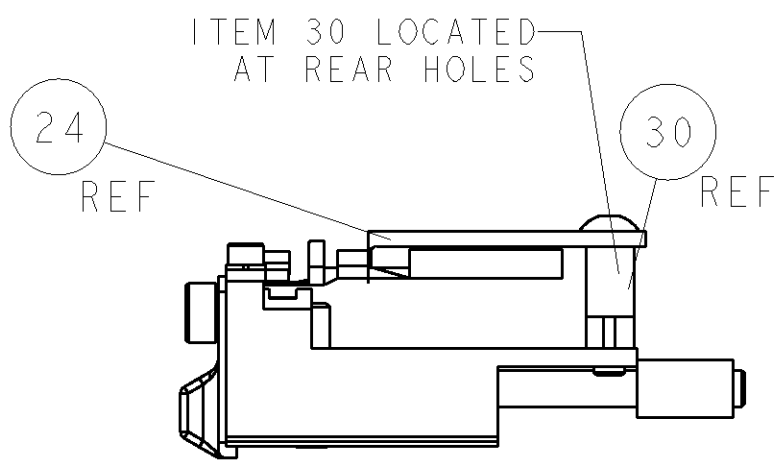


TERMINAL NAME: MALE METRI-PACK 280						
TE PN	MFG PN	DELPHI TERMINAL - DELPHI CRIMP SPECS				
286945	12129497					
-	-	PAD LTR	CRIMP HEIGHT		WIRE SIZE	
-	-	A	1.90±0.05mm [.075±.002]		3mm2	
-	-	B	1.65±0.05mm [.065±.002]		2mm2	
-	-	C	-		-	
-	-	D	-		-	
SEAL PN.	-					
1572716-1	12010293	CRIMP	SIZE		TYPE	RANGE
1572716-2	12015359					
1572716-3	15324980	WIRE	3.25mm [.128]		F	2-3mm2
-	-	INSUL	4.32mm [.170]		O	Ø2.80-3.49mm
WIRE STRIP LENGTH	TERM APPL SPEC	FEED	APPL INSTRUCTIONS		SET UP GAGE	
4.90-5.28mm	NONE	15.88mm	408-8040		458637-	

- △ RECOMMENDED SPARE PARTS
- △ GREASE LIGHTLY
- △ GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
- △ APPLY TORQ-SEAL IN ALLEN SOCKET TO FILL HOLE AFTER FLAT HD HAS BEEN ADJUSTED TO CORRECT HEIGHT AT QUALIFICATION. APPLY PN 1-23419-5 LOC-TITE TO THREADS.

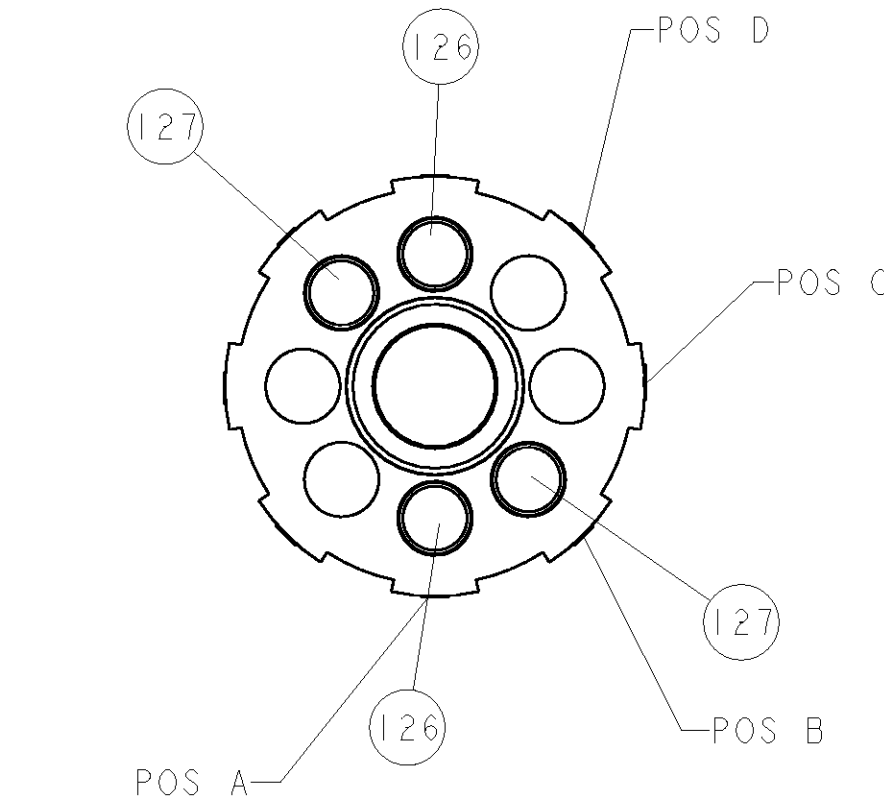

FEED TRACK POSITION

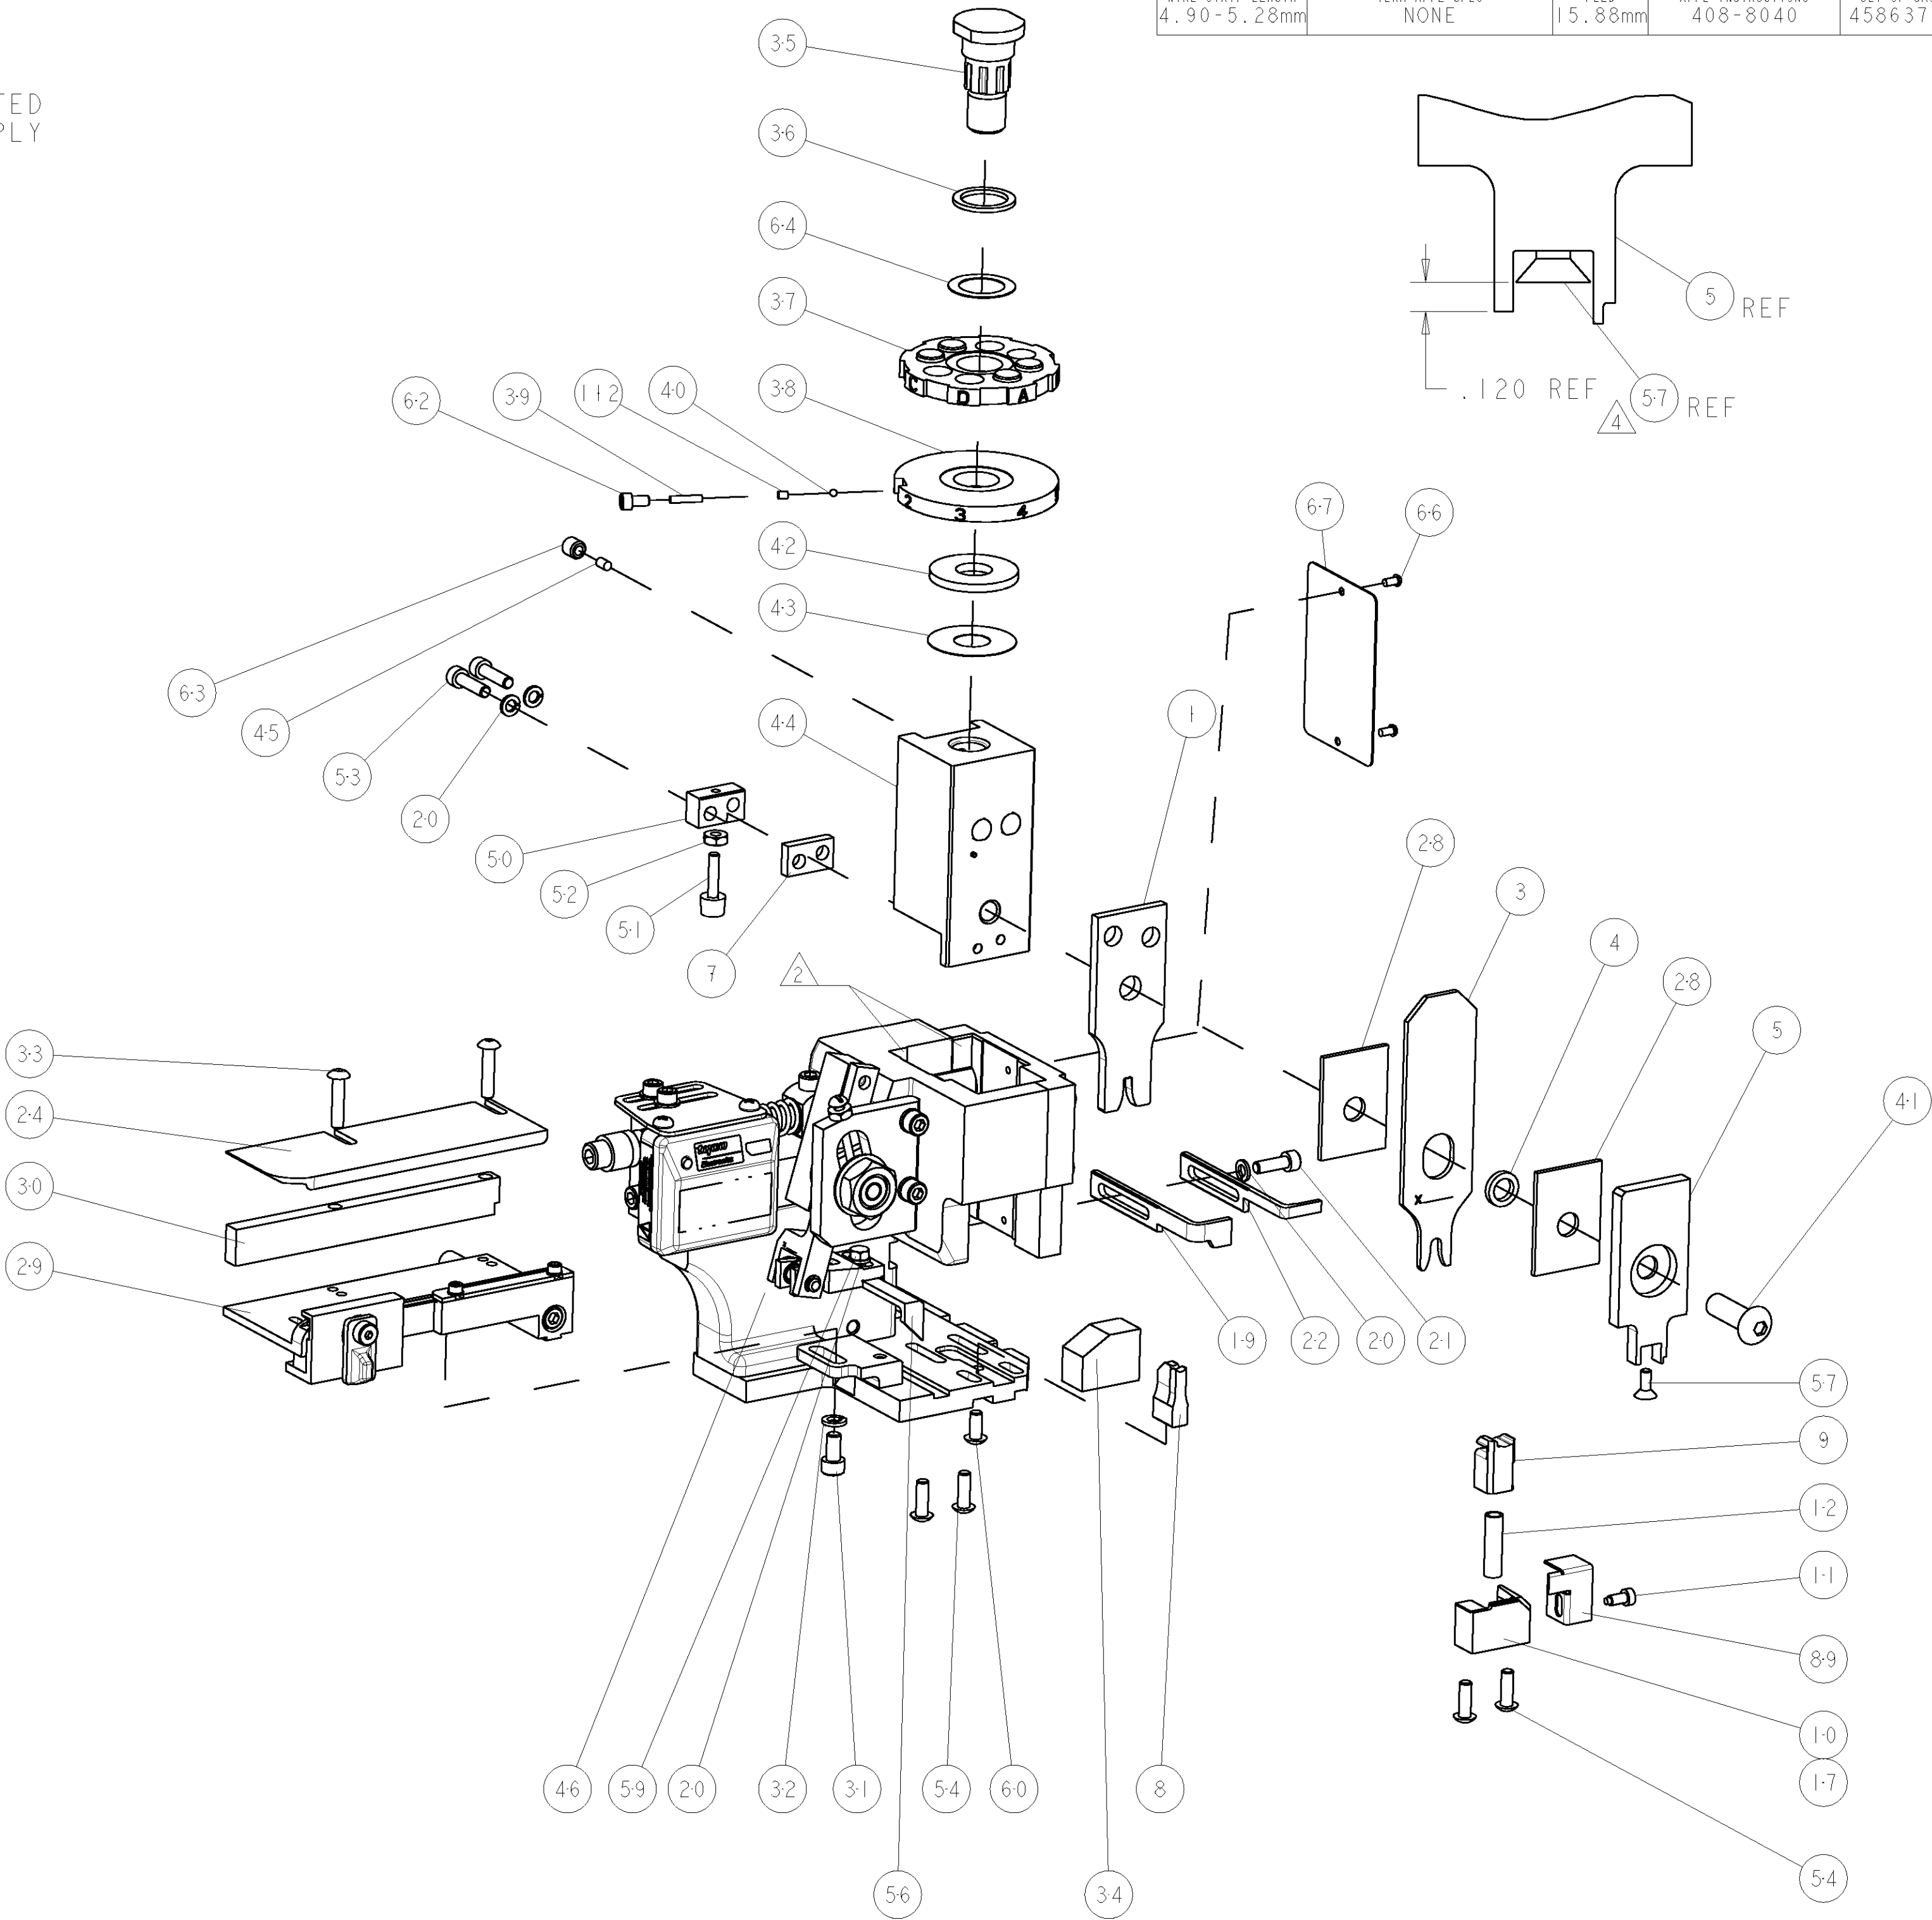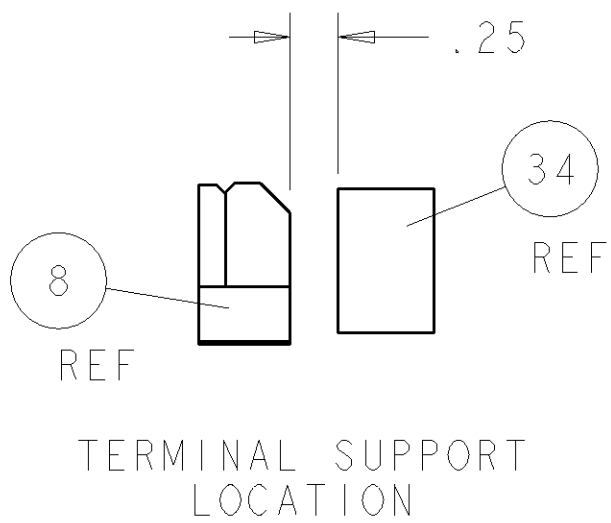

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1852045-3](#)