
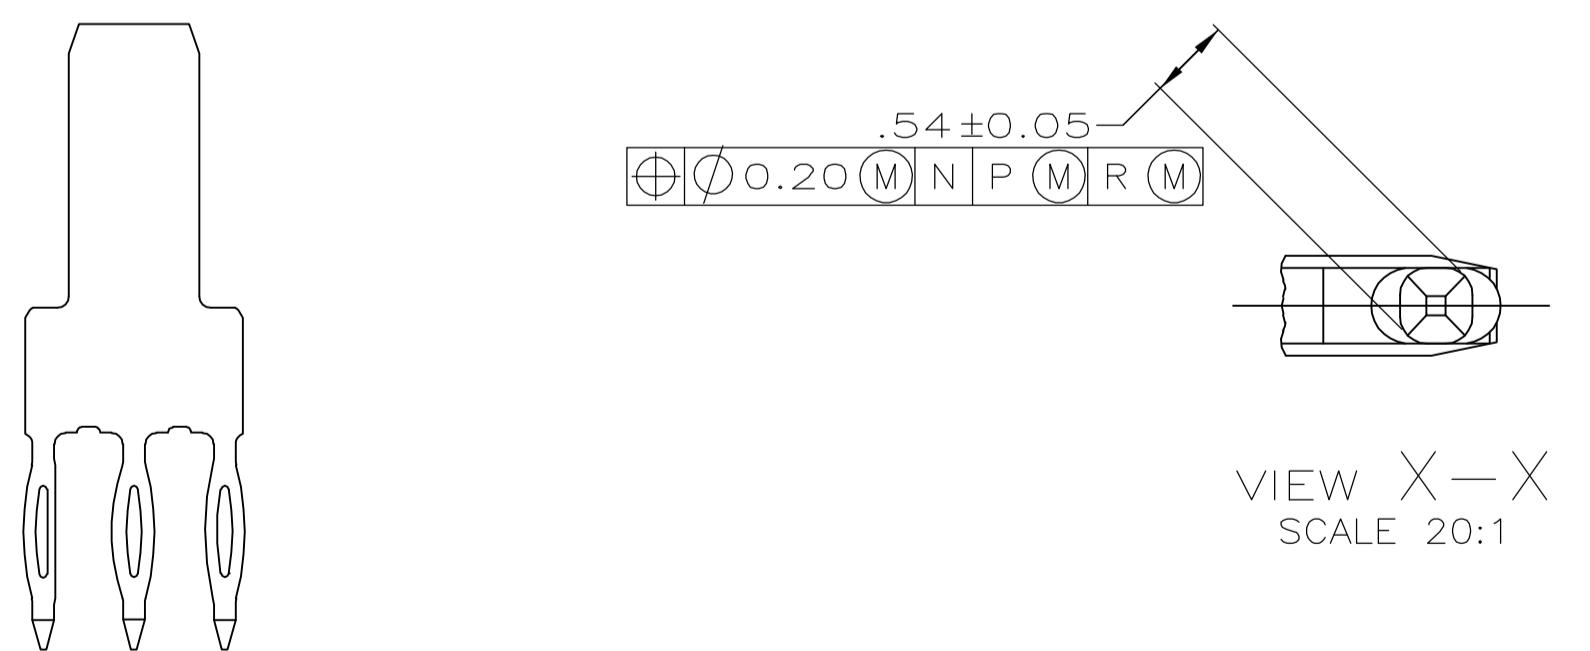


RECOMMENDED CIRCUIT PATTERN  
PER IPC-D300 TYPE II, CLASS C  
(COMPONENT SIDE)

▲ HOUSING MATERIAL: LIQUID CRYSTAL POLYMER.  
COLOR: NATURAL.  
▲ CONTACT MATERIAL: PHOSPHOR BRONZE.  
▲ CONTACT FINISH:  
UNDERPLATE (ENTIRE CONTACT):  
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290  
ON MATING SURFACES:  
FLASH GOLD PER ASTM B 488, OVER  
0.00076 MIN PALLADIUM-NICKEL OVER UNDERPLATE, OR  
0.00076 MIN GOLD PER ASTM B 488 OVER UNDERPLATE.  
ON LEADS:  
0.00127 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.  
LUBRICATION (MIN MATING SURFACES):  
SURFACE CONDITIONER AFTER PLATING.  
▲ PART MARKING, LOCATED APPROXIMATELY AS SHOWN.  
APPROXIMATELY AS SHOWN.

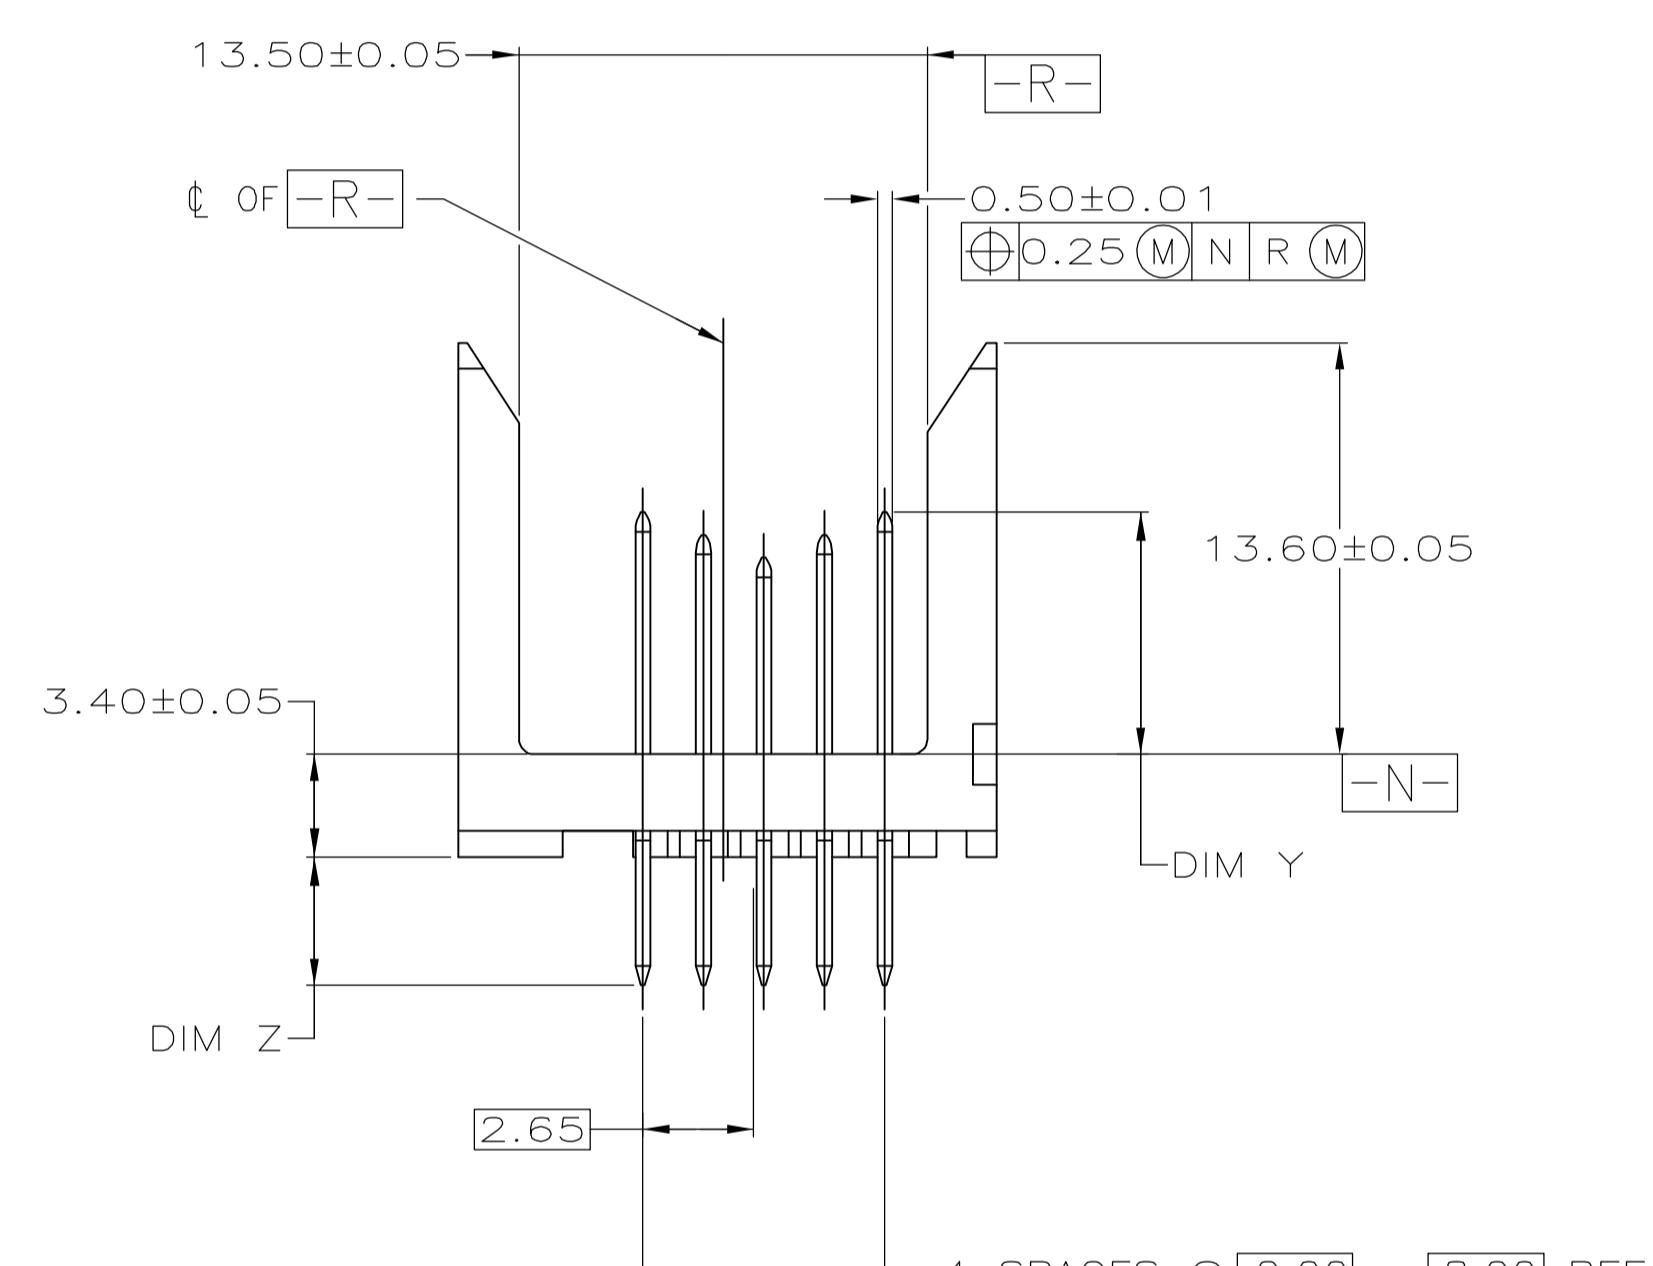

SECTION A-A  
SCALE 6:1

THIS DRAWING IS A CONTROLLED DOCUMENT.		4-21-98	5536673-1
4-23-98		D. KOVALICK	Tyco Electronics Corporation
4-23-98		D. KOVALICK	Harrisburg, PA 17105-3608
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
0 PLC		± -	
1 PLC		± 0.13	
2 PLC		± -	
3 PLC		± -	
4 PLC		± -	
MATERIAL		FINISH	
1 2		3	
CAGE CODE		DRAWING NO	
A1 00779		C 5536673	
CUSTOMER DRAWING		RESTRICTED TO	
A		—	
WEIGHT		SCALE 4:1	
A1		SHEET 1 OF 1	
REV A		APV	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5536673-1](#)