
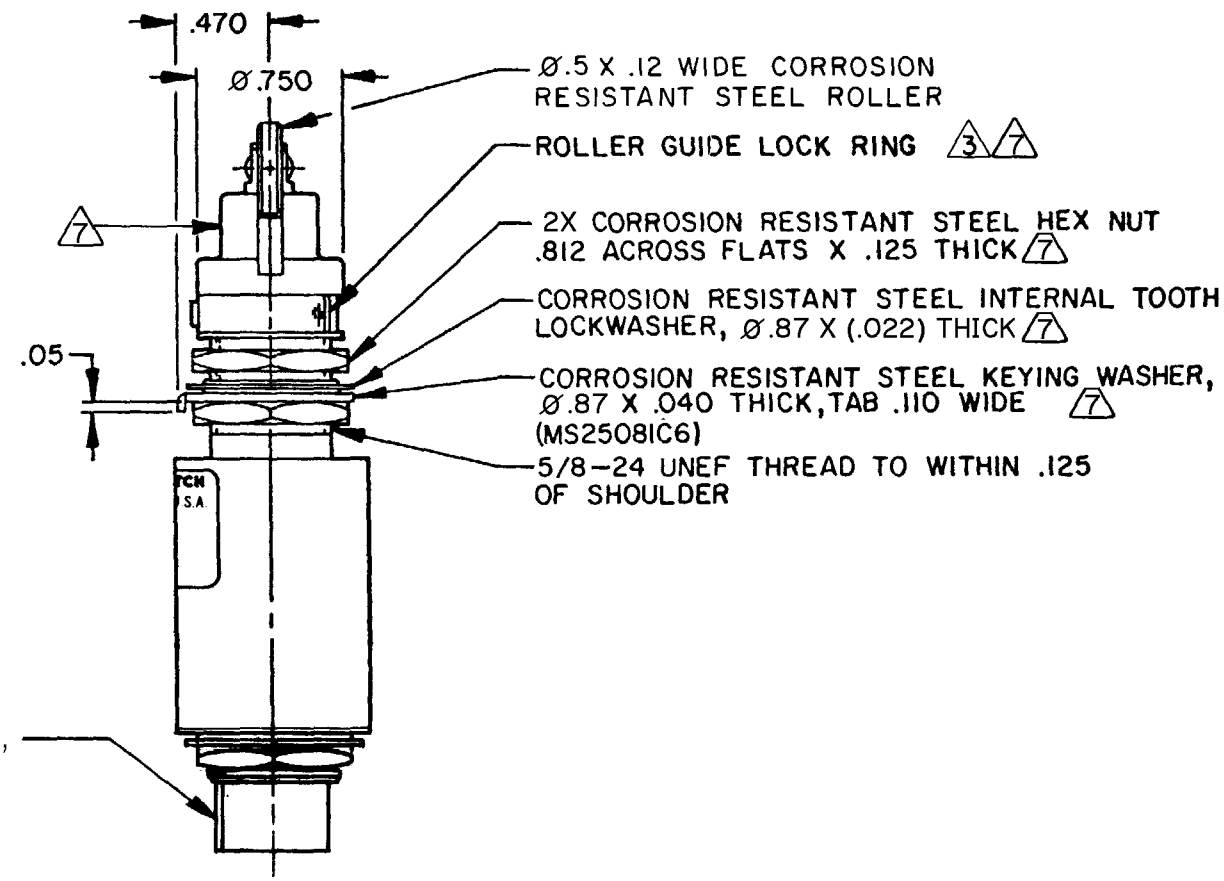
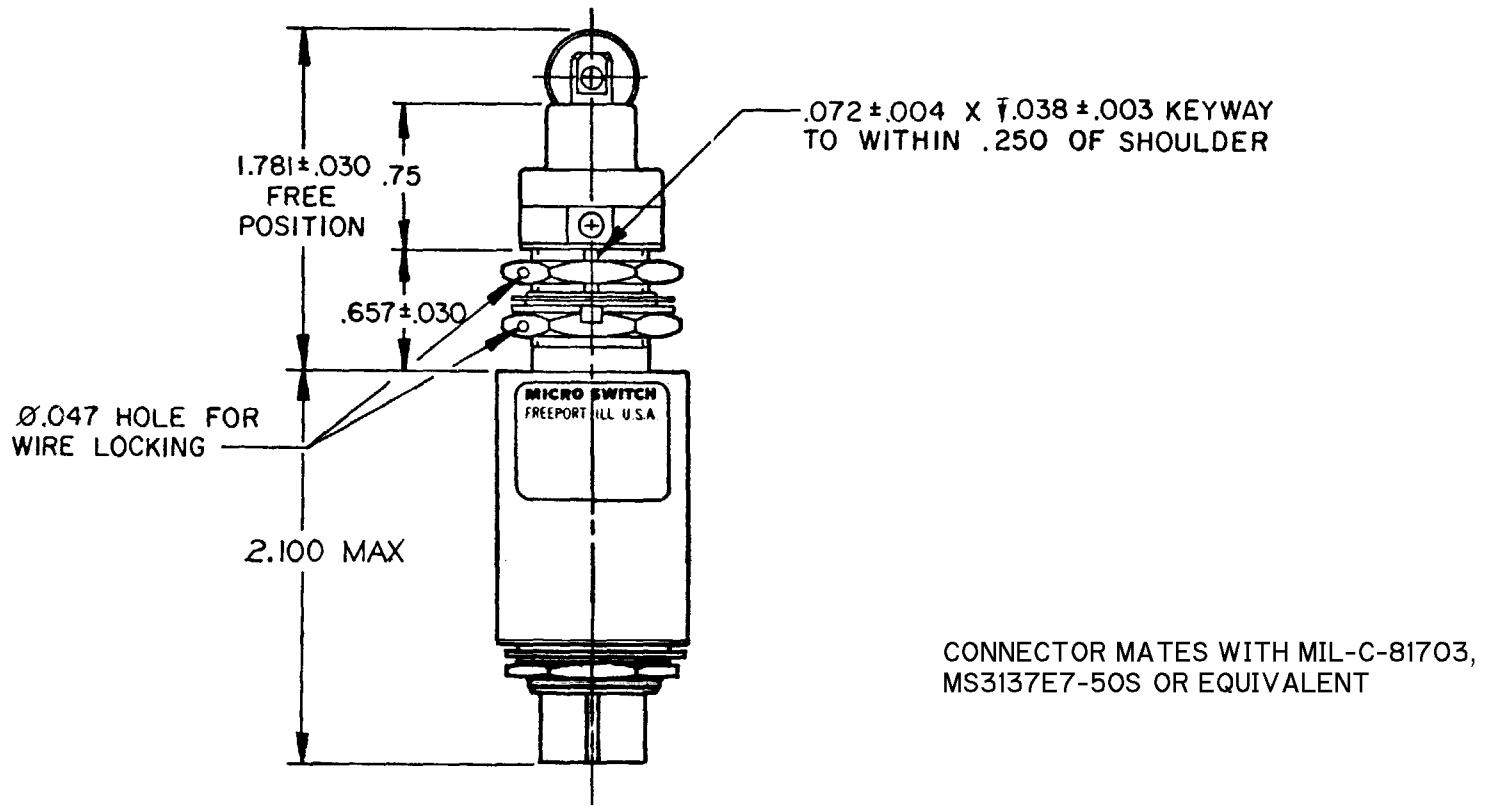
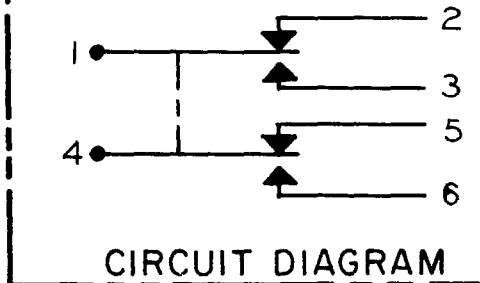


CATALOG LISTING
21EN9-R
PAGE 1 OF 1
REPLACES
RELEASE NO.
CHECK
JEF 7 SEPT 79
DRAWN
FORMTEK

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
21EN9-R

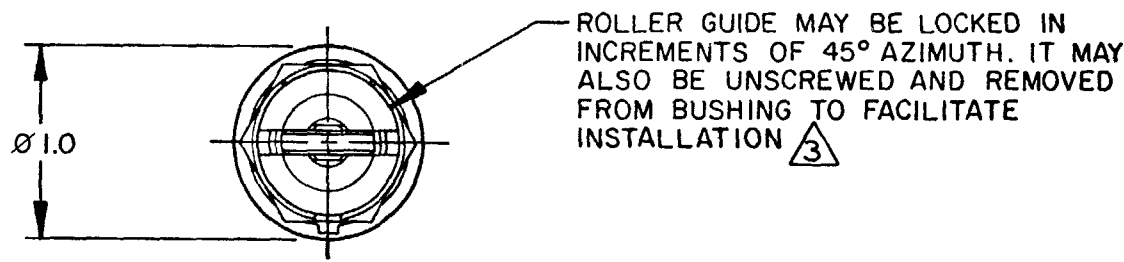

REVISIONS	
A	CO44351 JEF 7 SEPT 79
B	CO47573 PART 4 R J H 7 AUG 80
C	CO80689 J A S 25 JUN 98
D	200913 D L T 04 AUG 00

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.		THIRD ANGLE PROJECTION	SCALE FULL
DO NOT SCALE PRINT		TOLERANCES	
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±		DIM. TOL. DIM. TOL.	
NO PLACES X 1/34		X X 0.07/03	
ONE PLACE X, XX 0.07/016		X X X 0.38/015	
TWO PLACES X, XX 0.15/006		X X X 0.13/005	
THREE PLACES X, XXX 0.15/006		X X X X 0.13/005	
ANGLES		SI METRIC US CUSTOMARY	
DESIGN UNITS		RAW MATERIAL-COMMERCIAL STANDARD	
MICRO SWITCH STANDARDS APPLY		DIMENSIONS ARE TO BE MET BEFORE	
PROTECTIVE COATINGS ARE APPLIED		WEIGHT 5.25 OZ MAX	

- NOTES
- 1 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 4
 - 2 - CORROSION RESISTANT STEEL ENCLOSURE
 - 3 - TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
 - 4 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 5 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
 - 6 - KEYWAY IN MOUNTING BUSHING AND RECEPTACLE POLARIZING KEY ARE NOT NECESSARILY ALIGNED
 - 7 - HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[21EN9-R](#)