

CATALOG LISTING

1EN415-RB

PAGE 1 OF 1

RELEASE NO. PR-21754

REPLACES

ISSUE

3

CHECK

REVISIONS

A PR 21754

JJA

30 AUG 95

B CO-

93970

S A V

14 JAN 99

CHECK

1 SEP 95

CHECK

T S M

1 SEP 95





CHECK

DDM/CAD

DRAWN

J J A

30AUG95

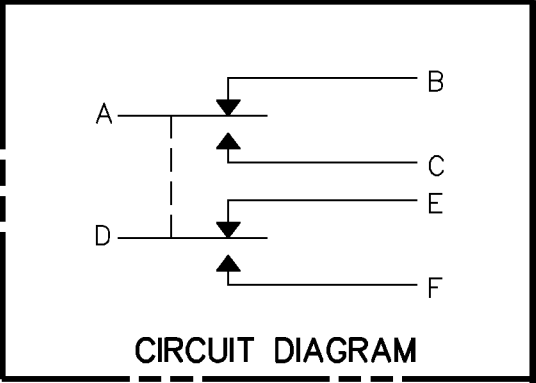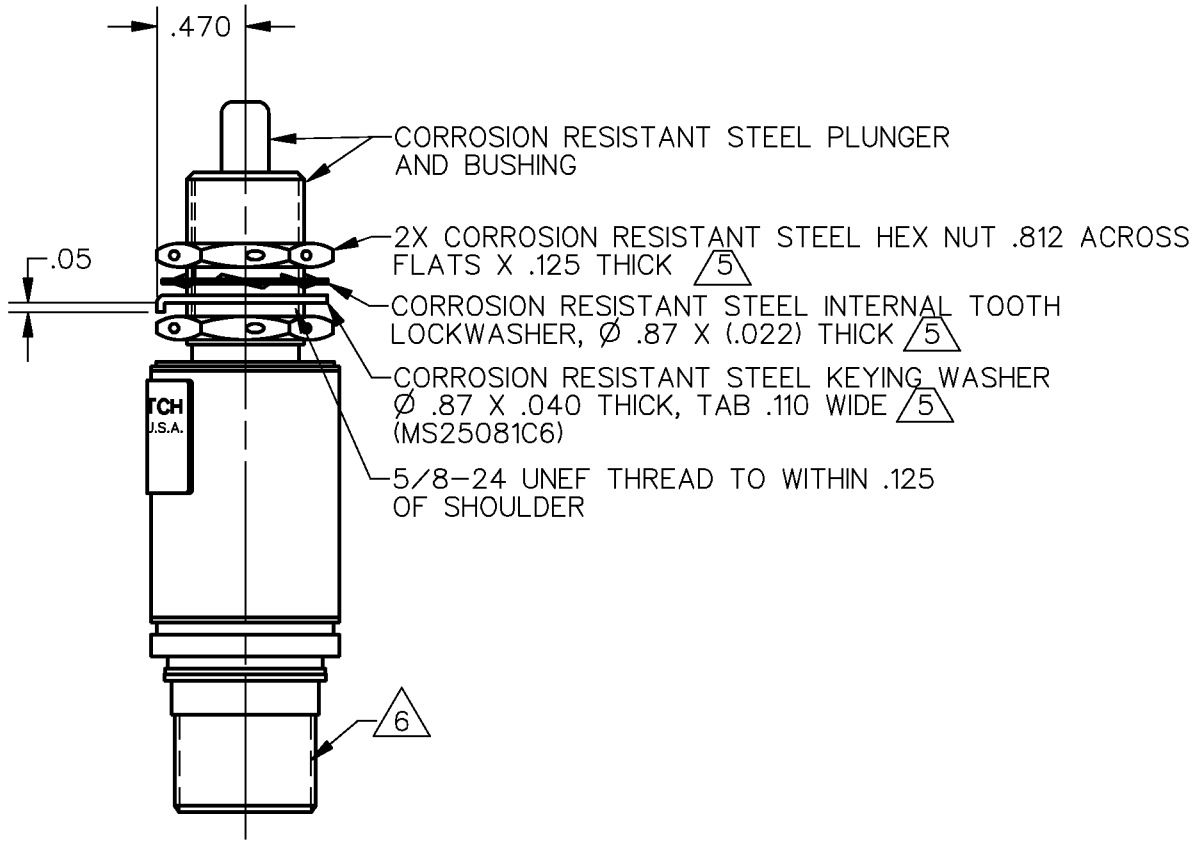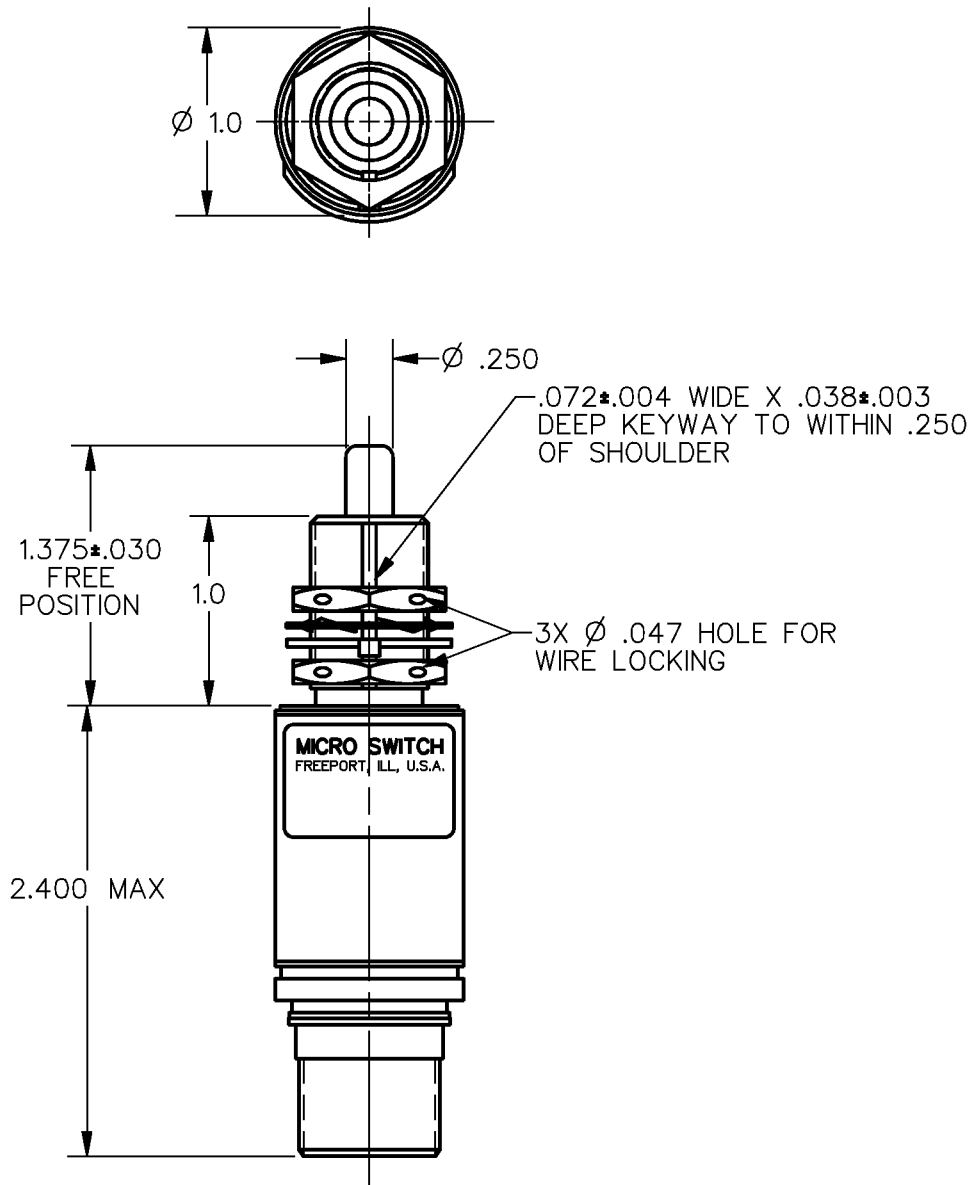

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH			THIRD ANGLE PROJECTION	
CHARACTERISTICS	ELECTRICAL DATA		SCALE	FULL
	CONTACT ARRANGEMENT 2X S P D T		DO NOT SCALE PRINT	
OPERATING FORCE ——— 4 LB NOM	LOAD	28 VDC		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
FULL OVERTRAVEL FORCE --- 17 LB MAX		SEA LEVEL	50,000 FT.	ONE PLACE (.) ±.030
RELEASE FORCE ——— 2 LB MIN	RES	1	1	TWO PLACE (.) ±.015
PRETRAVEL ——— .040 MAX	IND	.5	.5	THREE PLACE (.) ±.005
DIFFERENTIAL TRAVEL — .020 MAX			ANGLES	±
OVERTRAVEL ——— .250 MIN			WEIGHT	5.0 OZ MAX

- NOTES
- 1 — CORROSION RESISTANT STEEL ENCLOSURE
 - 2 — SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - 3 — COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 OF PLUNGER TRAVEL
 - 4 — CIRCUIT DIAGRAM, DATE CODE, FED. MFG. CODE AND CATALOG LISTING
ARE SHOWN ON NAMEPLATE
 - (5) HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805
 - (6) D38999/25YB98PN
 - (7) GOLD CONTACT BASIC SWITCHES

ANSI Y14.5M-1982 APPLIES

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[1EN415-RB](#)