

## Bus system cable - SAC-2P-MSB/ 2,0-910 SCO - 1518025

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Bus system cable, PROFIBUS (12 Mbps), 2-position, PUR halogen-free, violet RAL 4001, shielded, Plug straight M12 SPEEDCON, B-coded, on free cable end, Cable length: 2 m



### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 pc                                                                                                    |
| GTIN                                 | <br>4 017918 968144 |
| Weight per Piece (excluding packing) | 155.6 g                                                                                                 |
| Custom tariff number                 | 85444290                                                                                                |
| Country of origin                    | Poland                                                                                                  |

### Technical data

#### Dimensions

|                                            |       |
|--------------------------------------------|-------|
| Length of cable                            | 2 m   |
| Stripping length of the free conductor end | 50 mm |

#### Ambient conditions

|                                 |                                  |
|---------------------------------|----------------------------------|
| Ambient temperature (operation) | -25 °C ... 90 °C (Plug / socket) |
| Degree of protection            | IP65                             |
|                                 | IP67                             |

#### General

|                       |             |
|-----------------------|-------------|
| Rated current at 40°C | 4 A         |
| Rated voltage         | 250 V       |
| Number of positions   | 2           |
| Insulation resistance | ≥ 100 MΩ    |
| Coding                | B - inverse |

# Bus system cable - SAC-2P-MSB/ 2,0-910 SCO - 1518025

## Technical data

### General

|                      |                                |
|----------------------|--------------------------------|
| Signal type/category | PROFIBUS, 12 Mbps (max. 100 m) |
| Status display       | No                             |
| Overvoltage category | II                             |
| Degree of pollution  | 3                              |
| Torque               | 0.4 Nm (M12 connector)         |

### Material

|                          |                                             |
|--------------------------|---------------------------------------------|
| Contact material         | CuSn                                        |
| Contact surface material | Ni/Au                                       |
| Contact carrier material | TPU GF                                      |
| Material of grip body    | TPU, hardly inflammable, self-extinguishing |
| Material, knurls         | Zinc die-cast, nickel-plated                |

### Pin assignment

|                                                      |                         |
|------------------------------------------------------|-------------------------|
| Position = wire color (signal) = position (optional) | 2 (Plug) = GN (A cable) |
|                                                      | 4 (Plug) = RD (B cable) |

### Cable

|                                               |                                                            |
|-----------------------------------------------|------------------------------------------------------------|
| Cable type                                    | PROFIBUS                                                   |
| Cable type (abbreviation)                     | 910                                                        |
| UL AWM style                                  | 21198 (80°C/300 V)                                         |
| Cable structure                               | 1x2xAWG24/19                                               |
| Conductor cross section                       | 2x 0.25 mm <sup>2</sup> (Signal line)                      |
| AWG signal line                               | 24                                                         |
| Conductor structure signal line               | 19x 0.13 mm                                                |
| Core diameter including insulation            | 2.55 mm ±0.07 mm                                           |
| Wire colors                                   | Red, green                                                 |
| Overall twist                                 | 2 cores with 2 fillers to the core                         |
| Shielding                                     | Plastic-coated aluminum foil, tinned copper braided shield |
| Optical shield covering                       | 85 %                                                       |
| External sheath, color                        | violet RAL 4001                                            |
| External cable diameter D                     | 7.8 mm ±0.2 mm                                             |
| Smallest bending radius, fixed installation   | 40 mm                                                      |
| Smallest bending radius, movable installation | 65 mm                                                      |
| Number of bending cycles                      | 4000000                                                    |
| Bending radius                                | 65 mm                                                      |
| Traversing path                               | 4.5 m                                                      |
| Traversing rate                               | 3 m/s                                                      |
| Acceleration                                  | 3 m/s <sup>2</sup>                                         |

## Bus system cable - SAC-2P-MSB/ 2,0-910 SCO - 1518025

### Technical data

#### Cable

|                                 |                                                 |
|---------------------------------|-------------------------------------------------|
| Number of bending cycles        | 5000000                                         |
| Bending radius                  | 80 mm                                           |
| Traversing path                 | 4.5 m                                           |
| Traversing rate                 | 3 m/s                                           |
| Acceleration                    | 3 m/s <sup>2</sup>                              |
| Outer sheath, material          | PUR                                             |
| Material, filler                | PP                                              |
| Material conductor insulation   | Foam-Skin PP                                    |
| Conductor material              | Tin-plated Cu litz wires                        |
| Insulation resistance           | ≥ 5 GΩ*km                                       |
| Conductor resistance            | ≤ 78.6 Ω/km                                     |
| Cable capacity                  | nom. 30 pF/m                                    |
| Wave impedance                  | 150 Ω ±10 % (3 MHz ... 20 MHz)                  |
| Wave attenuation                | ≤ 0.049 dB/m (at 16 MHz)                        |
| Nominal voltage, cable          | 30 V                                            |
| Test voltage Core/Core          | 1500 V (50 Hz, 1 min.)                          |
| Test voltage Core/Shield        | 1500 V (50 Hz, 1 min.)                          |
| Flame resistance                | UL 1581, Sec. 1060 (FT-1)                       |
|                                 | IEC 60332-1-2                                   |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815        |
|                                 | According to IEC 60754-1                        |
| Other resistance                | Low adhesion                                    |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation)    |
|                                 | -30 °C ... 80 °C (cable, flexible installation) |
|                                 | ≤ 70 °C (cable, drag chain applications)        |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |



# Bus system cable - SAC-2P-MSB/ 2,0-910 SCO - 1518025

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000830 |
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

## Approvals

### Approvals

### Approvals

### EAC

### Ex Approvals

### Approvals submitted


### Approval details

|     |
|-----|
| EAC |
|-----|

## Drawings


## Bus system cable - SAC-2P-MSB/ 2,0-910 SCO - 1518025

Schematic diagram




Pin assignment M12 male connector, 5-pos., B-coded, male side

Cable cross section




PROFIBUS [910]

Dimensional drawing

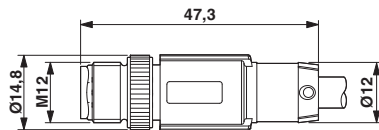

Plug, M12 x 1, straight, shielded

Circuit diagram

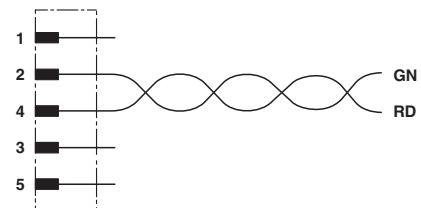

Contact assignment of the M12 plug

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phoenix Contact:](#)

[1518025](#)