


PANDUIT PART NO	PACKAGE QTY	MAX BUNDLE DIAMETER MTRT TOOL	MAX BUNDLE DIAMETER PTRT TOOL	"L" LENGTH $\pm .3"$ [7]
MRT1.5H-L4	50	1.5" [38]	2.3" [58]	10.6" (269)
MRT2H-L4	50	2.0" [51]	2.8" [71]	12.2" (310)
MRT4H-L4	50	4.0" [102]	4.8" [122]	18.5" (470)
MRT6H-L4	50	6.0" [152]	6.8" [172]	24.8" (630)

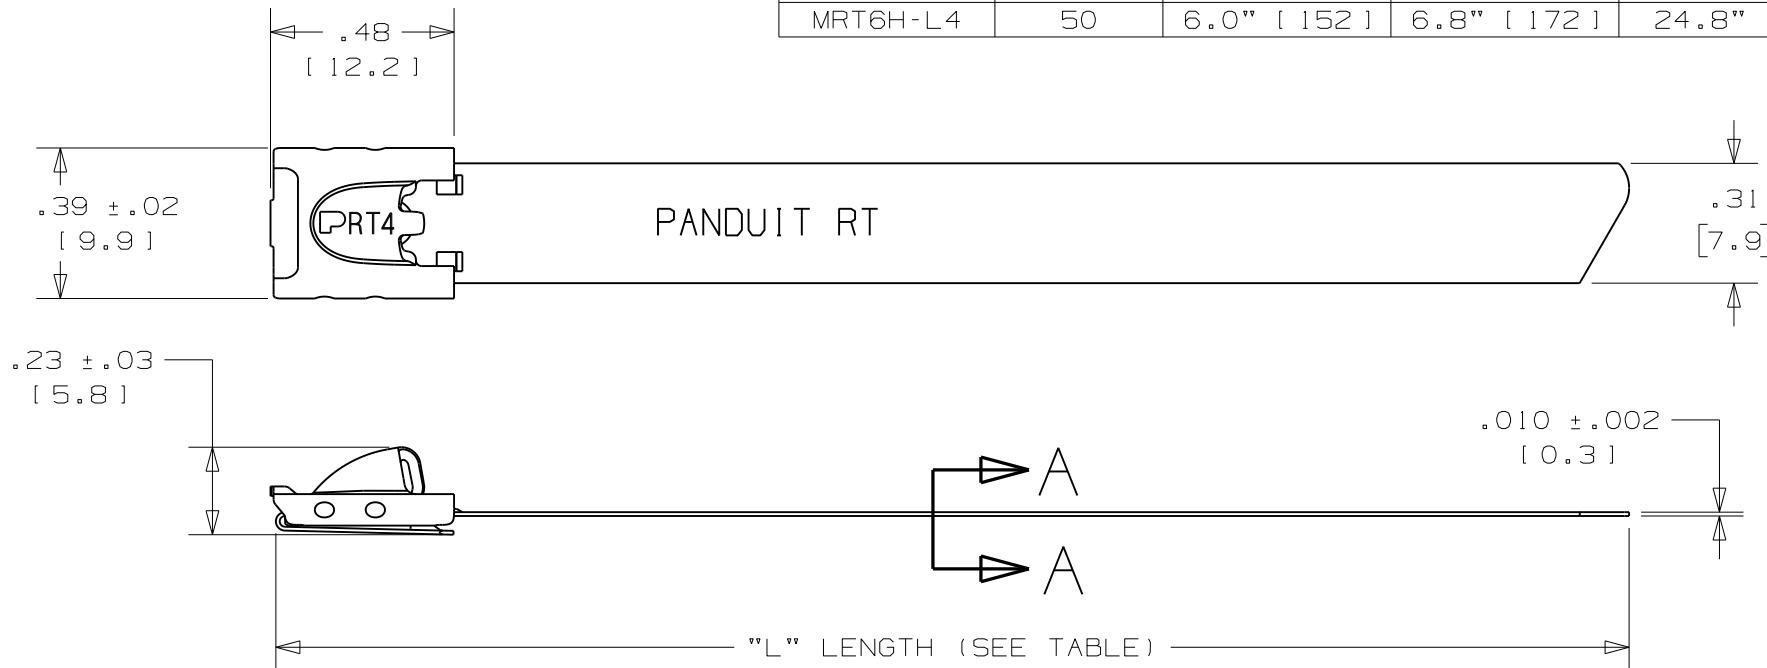

NOTES:

1. APPLICATION TOOLS - MTRTH & PTRT
2. MINIMUM LOOP TENSILE STRENGTH - 400 LBS. (1780 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:

XXX = $\pm .010$ [.25]	XX = $\pm .02$ [.5]
X = $\pm .03$ [.8]	ANGLES = $\pm 2^\circ$
5. MATERIAL: 304 STAINLESS STEEL

FULLY ROUNDED
EDGES ALONG
STRAP BODY

SECTION A-A
SCALE 8:1



TINLEY PARK, ILLINOIS

METAL TIE - HEAVY SERIES
RETAINED TENSION - 304 STAINLESS STEEL
CUSTOMER DRAWING

10A	3/12	MIMRGRO	NOTE #3 METRIC DIMENSIONS NOTED AS BEING SHOWN FOR REFERENCE ONLY
REV	DATE	BY	CHK

DESCRIPTION

DRAWN BY JAMB CHK'D EJD SCALE 2:1 DRAWING NO. N41235BS_DC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[MRT1.5H-L4](#) [MRT2H-L4](#) [MRT4H-L4](#) [MRT6H-L4](#)