
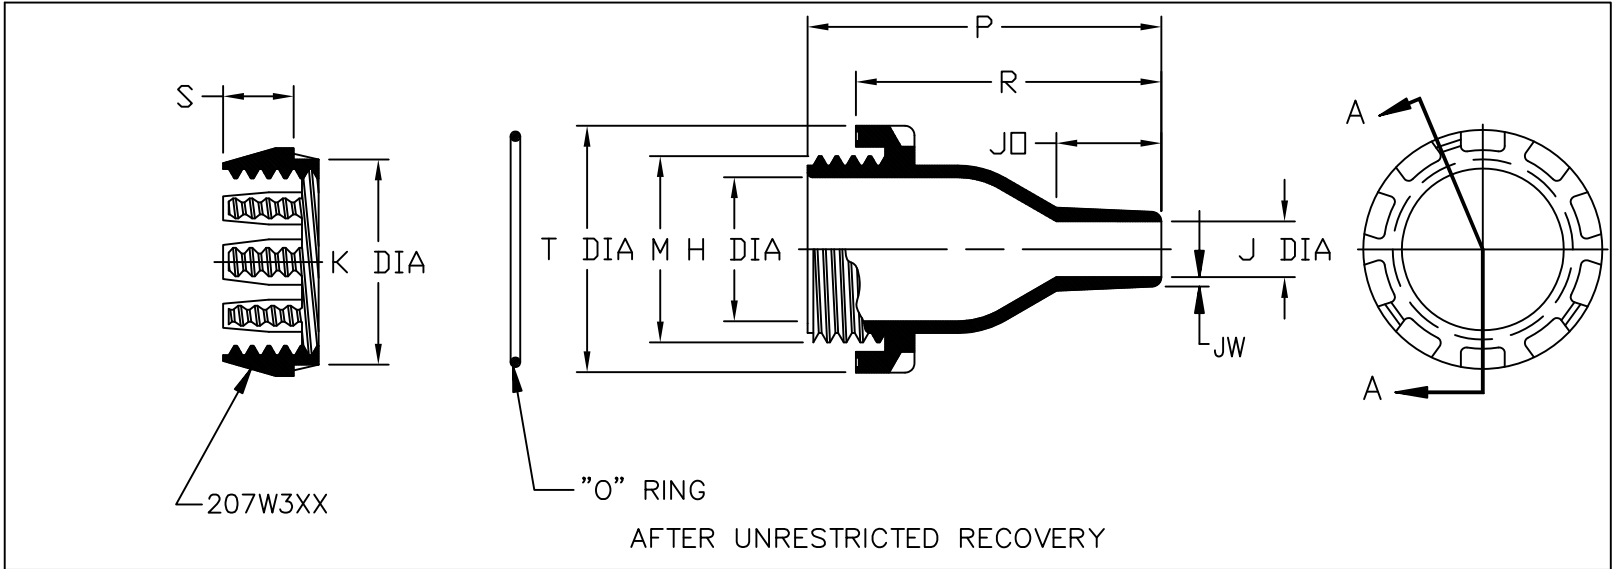


NOTES

1. ALL DIMENSIONS ARE IN $\frac{\text{INCHES}}{\text{[MILLIMETERS]}}$
2. DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
a - AS SUPPLIED
b - AFTER UNRESTRICTED RECOVERY
3. COATING IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS WHEN COATING IS ADDED, ENTRY DIAMETERS WILL BE REDUCED BY 0.06 MAX.
4. RECOMENDED MAXIMUM PANEL THICKNESS IS 8mm

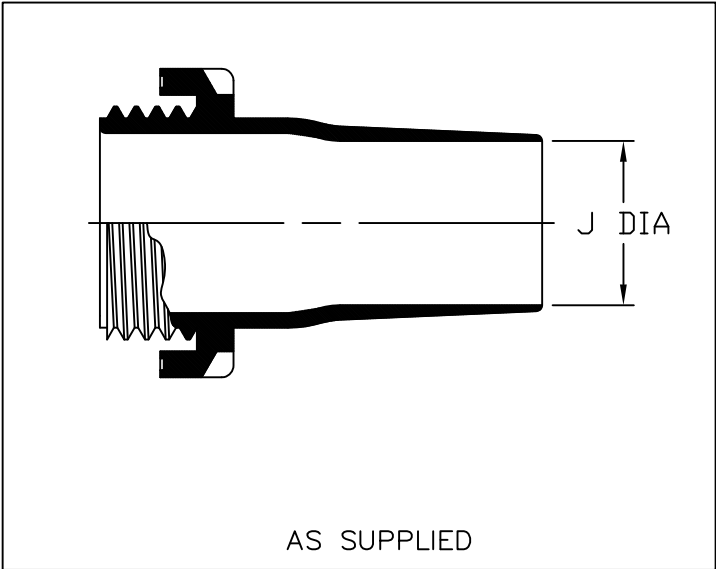

ORDERING INFORMATION

BASE PART NUMBER 207W2XX -X XX /XX -0

MATERIAL DASH NUMBER 207W2XX -X XX /XX -0

-3 POLYOLEFIN, SEMI RIGID (RT-301)
-4 POLYOLEFIN, FLEXIBLE (RT-1304)
-25 ELASTOMER, FLUID RESISTANT (RT-1325)
-100 POLYOLEFIN, SEMI FLEXIBLE, ZEROHAL (RT-1323)

MODIFICATION NUMBER 207W2XX -X XX /XX -0

ADHESIVE SLASH NUMBER 207W2XX -X XX /XX -0

SEE COMPATIBILITY CHART BELOW

COLOR DESIGNATOR 207W2XX -X XX /XX -0

TABLE OF DIMENSIONS

PART NUMBER	H	J		J0	K	M	P	R	S	T	JW	Hole DIA	Torque Nm
	Ref b	Min a	Max b	Max b	Ref b	THREAD b	$\pm 10\%$ b	$\pm 10\%$ b	$\pm 10\%$ b	Ref b	$\pm 20\%$ b	$\pm 0.02 \pm 0.5$ DIA	
207W213	.47 [12,0]	.39 [10,0]	.15 [4,0]	.60 [15,3]	.90 [23,0]	.78 [20,0]	2.44 [62,0]	1.93 [49,0]	.51 [13,0]	1.25 [32,0]	.04 [1,0]	.94 [24,0]	3
207W223	.78 [20,0]	.71 [18,0]	.27 [7,0]	.76 [19,5]	1.30 [33,0]	1.18 [30,0]	2.83 [72,0]	2.32 [59,0]	.63 [16,0]	1.65 [42,0]	.07 [1,8]	1.33 [34,0]	8
207W234	1.22 [31,0]	1.10 [28,0]	.47 [12,0]	1.06 [27,0]	1.81 [46,0]	1.65 [42,0]	3.42 [87,0]	2.91 [74,0]	.71 [18,0]	2.28 [58,0]	.10 [2,5]	1.85 [47,0]	11
207W245	1.77 [45,0]	1.65 [42,0]	.71 [18,0]	1.26 [32,2]	2.34 [59,5]	2.20 [56,0]	4.01 [102,0]	3.50 [89,0]	.71 [18,0]	2.79 [71,0]	.12 [3,0]	2.38 [60,5]	14
207W258	2.67 [68,0]	2.52 [64,0]	1.18 [30,0]	1.53 [39,0]	3.30 [84,0]	3.15 [80,0]	4.80 [122,0]	4.29 [109,0]	.71 [18,0]	3.82 [97,0]	.12 [3,0]	3.34 [85,0]	16
207W264	1.57 [40,0]	1.49 [38,0]	.59 [15,0]	1.11 [28,3]	2.12 [54,0]	1.97 [50,0]	3.74 [95,0]	3.22 [82,0]	.71 [18,0]	2.62 [66,5]	.10 [2,5]	2.16 [55,0]	11

If this document is printed it becomes uncontrolled. Check for the latest revision

COMPATIBILITY CHART

MATERIAL DASH NO.	ADHESIVE (COATING) SLASH NUMBER	ADHESIVE (COATING) S NUMBER
-3	/42; /86;	S-1017; S-1048
-4	/42; /86;	S-1017; S-1048
-25	/86; /225	S-1048; S-1206
-100	/86; /180	S-1048; S-1030

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC AND INCHES ARE IN BRACKETS. DECIMAL TOLERANCES
XXX ± 0.13 (.005)
XX ± 0.25 (.01)
X ± 0.50 (.10)
ANGLE TOLERANCE
.X ± 1 DEG.

DRAWN MMAZARIEGOS DATE 5/28/12
APPROVED D. HURRELL DATE 5/30/12
RPN
SEE TABLE
CAD FILE: 207W213THRU264CD

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.

THIRD ANGLE PROJECTION

© 2014 Tyco Electronics Corporation. All rights reserved.

Raychem Molded Parts
CUSTOMER DRAWING

TE Connectivity

TITLE
FEEDTHROUGH SEAL

SIZE B CODE IDENT. NO. 06090 DWG. NO. 207W213THRU264

SCALE: NTS DO NOT SCALE THIS DRAWING SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[207W245-25-0](#)