


D


C

B

A

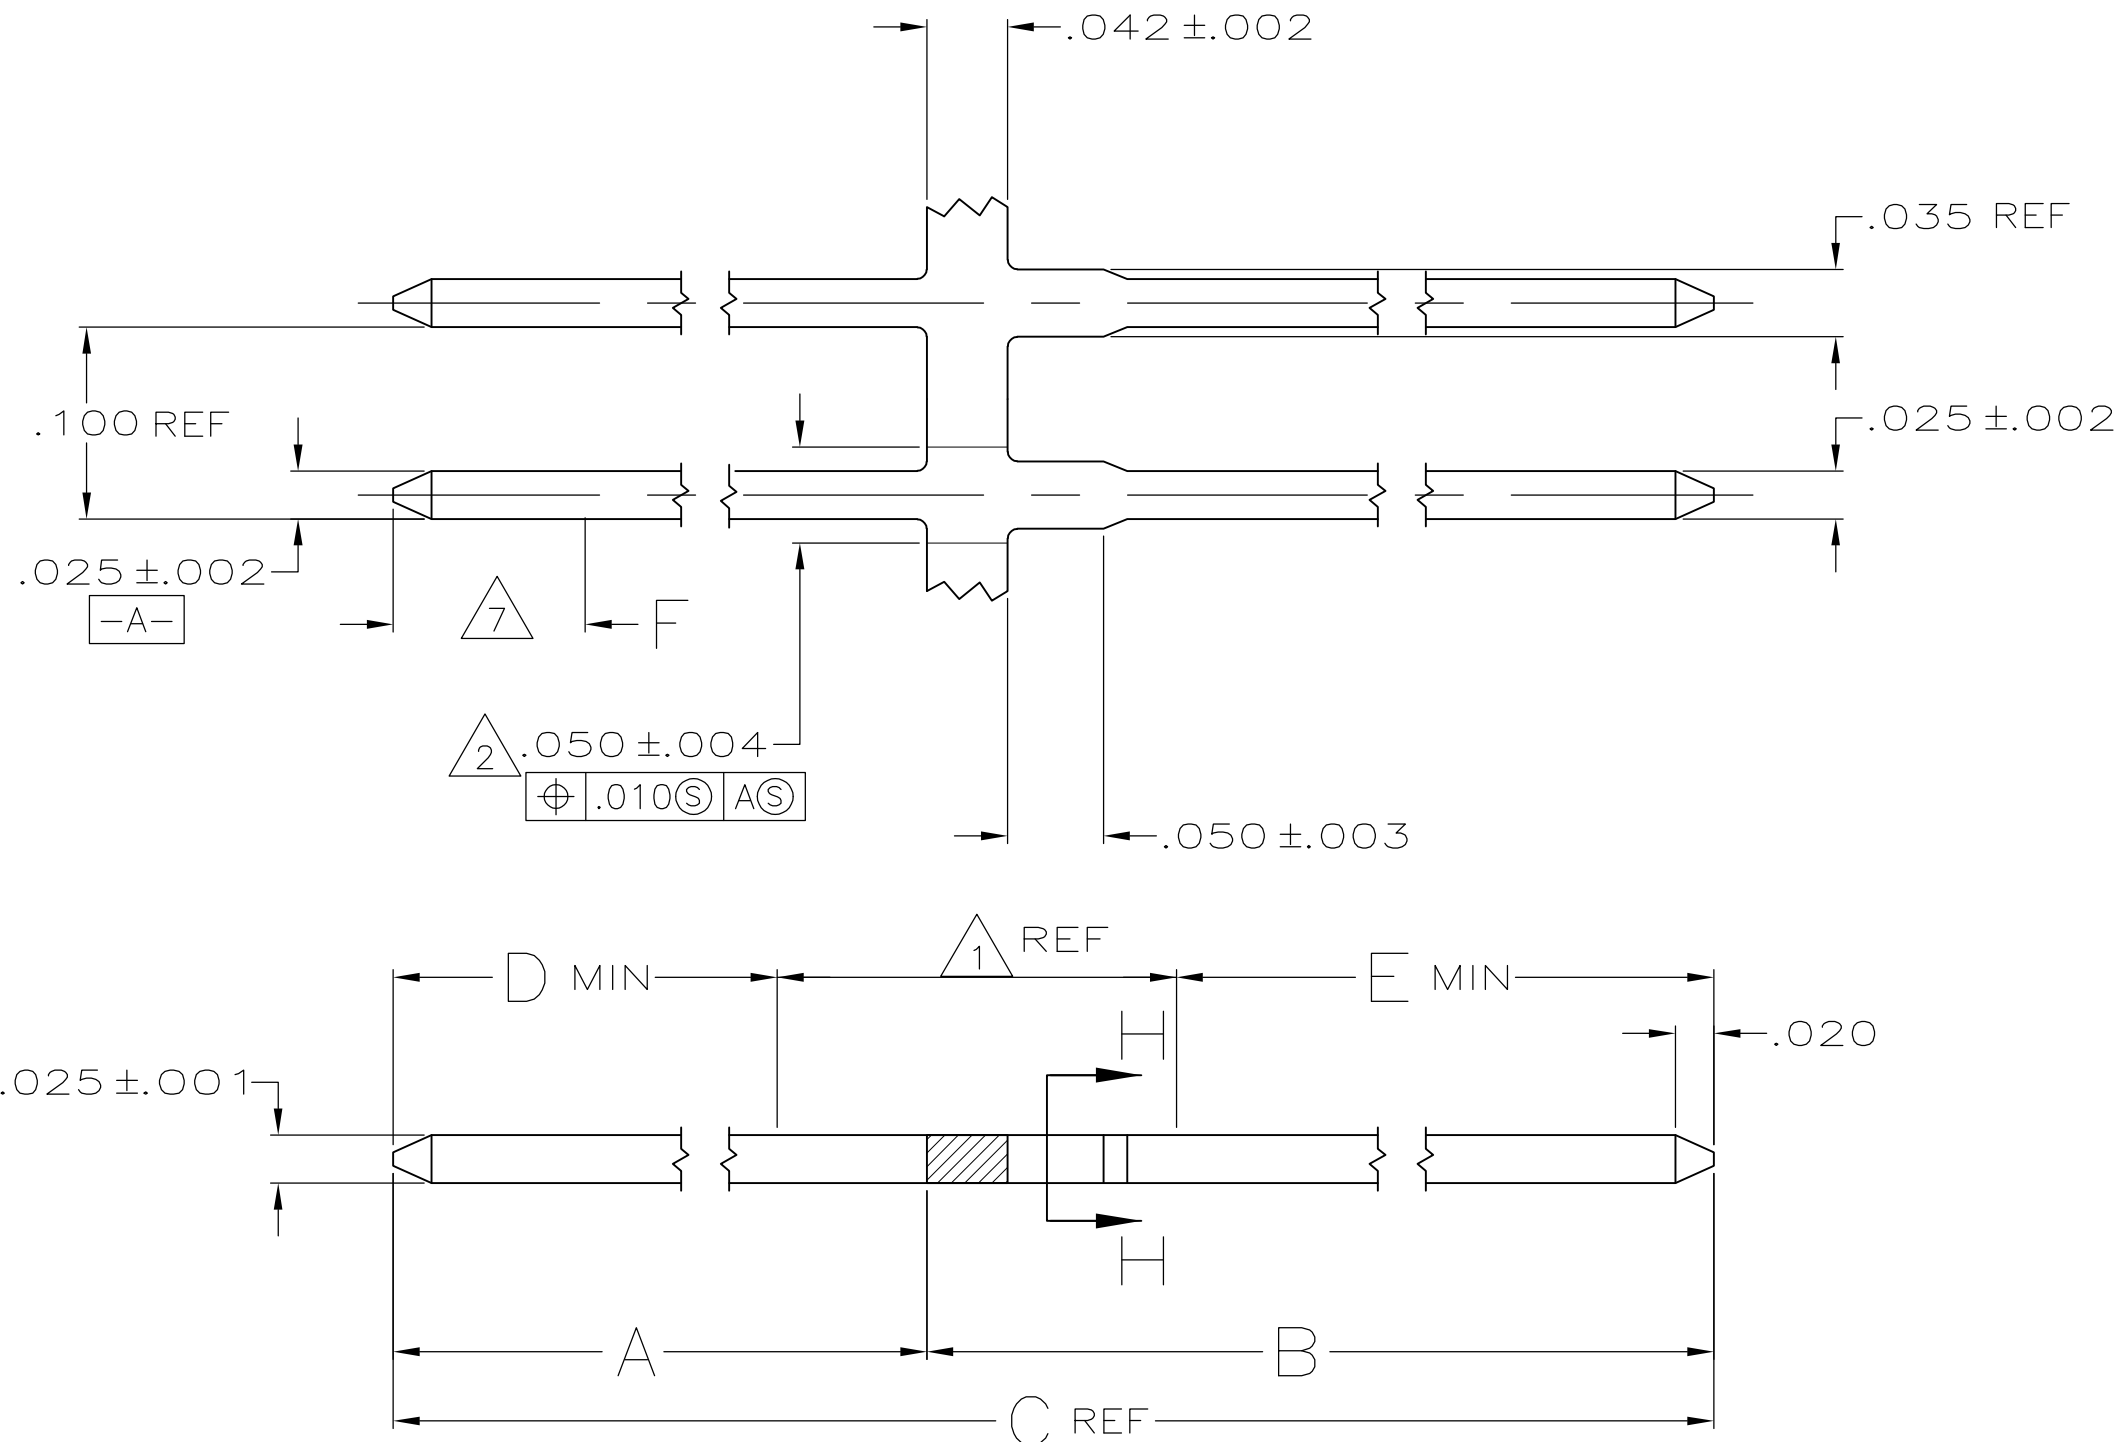

- 1 THE AREA BETWEEN D & E WILL BE PLATED WITH .000050 MIN NICKEL
- 2 APPLICATOR CUT-OFF DIMENSION.
- 3 .000030 MIN GOLD OVER .000050 MIN NICKEL
- 4 .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
- 5 .000015 MIN GOLD OVER .000050 MIN NICKEL.
- 6 .000050 MIN GOLD OVER .000050 MIN NICKEL.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 8 .000100-.000200 MATTE TIN OVER .000050 NICKEL.
- 9 ROHS 2002/95/EC COMPLIANT.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

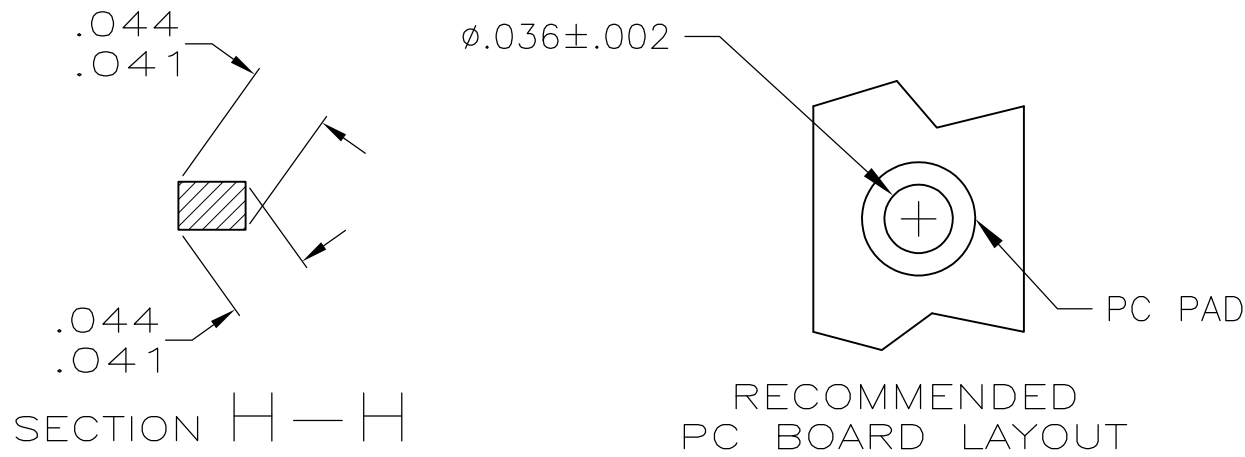

SUPERSEDED BY 4-87022-1

OBSOLETE	.100	8	6	.125	.200	.483	.165	.318	5-87623-8
	.100	8	6	.160	.200	.828	.550	.278	5-87623-7
	.100	8	6	.220	.200	.628	.350	.278	5-87623-6
	.100	8	6	.280	.200	.688	.410	.278	5-87623-5
	.100	8	5	.125	.200	.443	.165	.278	5-87623-4
OBSOLETE	.100	8	5	.160	.200	.828	.550	.278	5-87623-3
	.100	8	5	.160	.200	1.016	.738	.278	5-87623-2
	.100	8	3	.125	.200	.443	.165	.278	5-87623-1
	.100	4	6	.125	.200	.483	.165	.318	87623-8
	.100	4	6	.160	.200	.828	.550	.278	87623-7
OBSOLETE	.100	4	6	.220	.200	.628	.350	.278	87623-6
OBSOLETE	.100	4	6	.280	.200	.688	.410	.278	87623-5
	.100	4	5	.125	.200	.443	.165	.278	87623-4
OBSOLETE	.100	4	5	.160	.200	.828	.550	.278	87623-3
OBSOLETE	.100	4	5	.160	.200	1.016	.738	.278	87623-2
	.100	4	3	.125	.200	.443	.165	.278	87623-1
F	FINISH OVER AREA E	FINISH OVER AREA D	E	D	C	B	A	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. A. Shuey 11Dec96	TE Connectivity					
DIMENSIONS: INCHES		CHK -						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. A. Shuey 11Dec96		NAME		
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		PRODUCT SPEC		POST, MOD II		
MATERIAL PHOS BRONZE		FINISH SEE TABLE		APPLICATION SPEC		SIZE CAGE CODE DRAWING NO		RESTRICTED TO
				WEIGHT -		A2 00779 C=87623		-
CUSTOMER DRAWING				SCALE 10:1		SHEET 1 of 1		REV F3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[87623-1](#)