

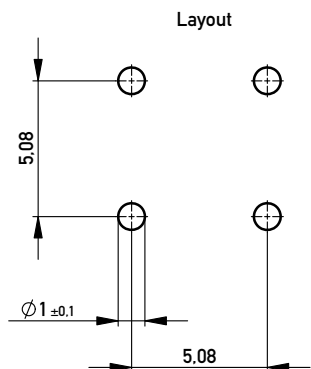
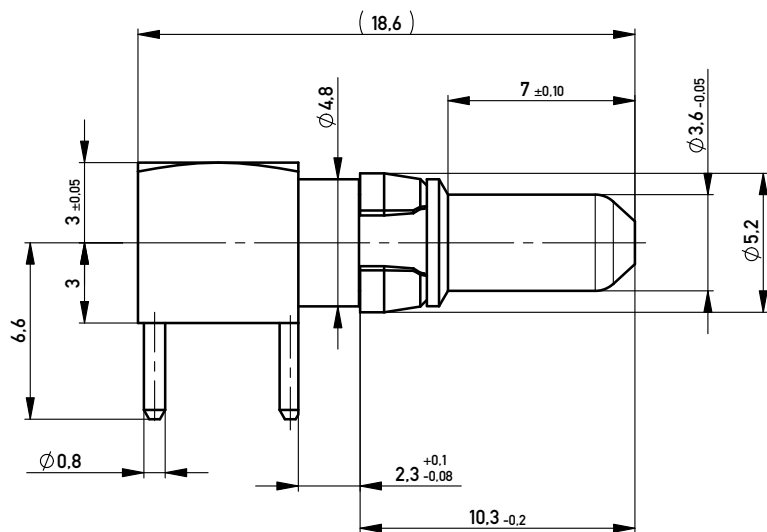


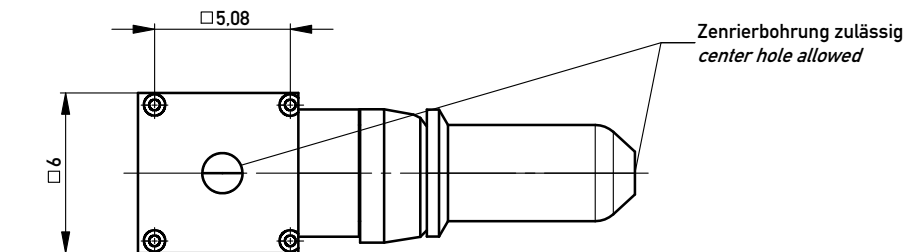

M 2:1



Masse nur informativ,
keine Prüfpläne erstellen.

Technical Data:

Insertion/withdrawal force per contact: $\leq 10\text{N} / \leq 1.6\text{N}$
 Mechanical operations: ≥ 500
 Contact resistance: $\leq 1\text{m}\Omega$

Operation Temperature: $-55^{\circ}\text{C} - +125^{\circ}\text{C}$

Solder temperature: according JEDEC 020C
 Suitable assembly process: leadfree wave / reflow soldering

RoHS compliance: yes (6/6)

Designed for use with: right angle male DIN connector

Packaging: antistatic plastic bag
 Packaging unit: 100 pieces per bag
 Marking of packaging: label or direct printed on bag
 required date see ERNI labeling spec. 254792

Current capacity: 40A

Missing informations
and dimensions
see at DIN 41626

104662	1	1.5-2.5 μm Cu, 2-3 μm NiP+, 0.15 μm Au	
294833	1	2-3 μm Ni min. 1.3 μm Au	2-3 μm Ni 0.4 μm Au max.
Part-No.	Class	Plating Mating Area	Plating Termination Area

Information:		Tolerances		Scale	5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation High Current Male Contact Right Angle Solder Termination	
h		29.07.2013		www.ERNI.com	
Index		Date		294832	
				I	
				A3	
				Class	
				STVSKO	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 9006 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[104662](#)