


CONNETTORE TIPO A (CON MOLLA DI RITEGNO ESTERNA)
CONNECTOR TYPE B (WITH INTERNAL SPRING)

SCALA NON IMPEGNATIVA
(DO NOT SCALE)
DIMENSIONI IN mm
(DIMENSIONS IN mm)

METRIC

PROIEZIONE EUROPEA
(EUROPEAN PROJECTION)

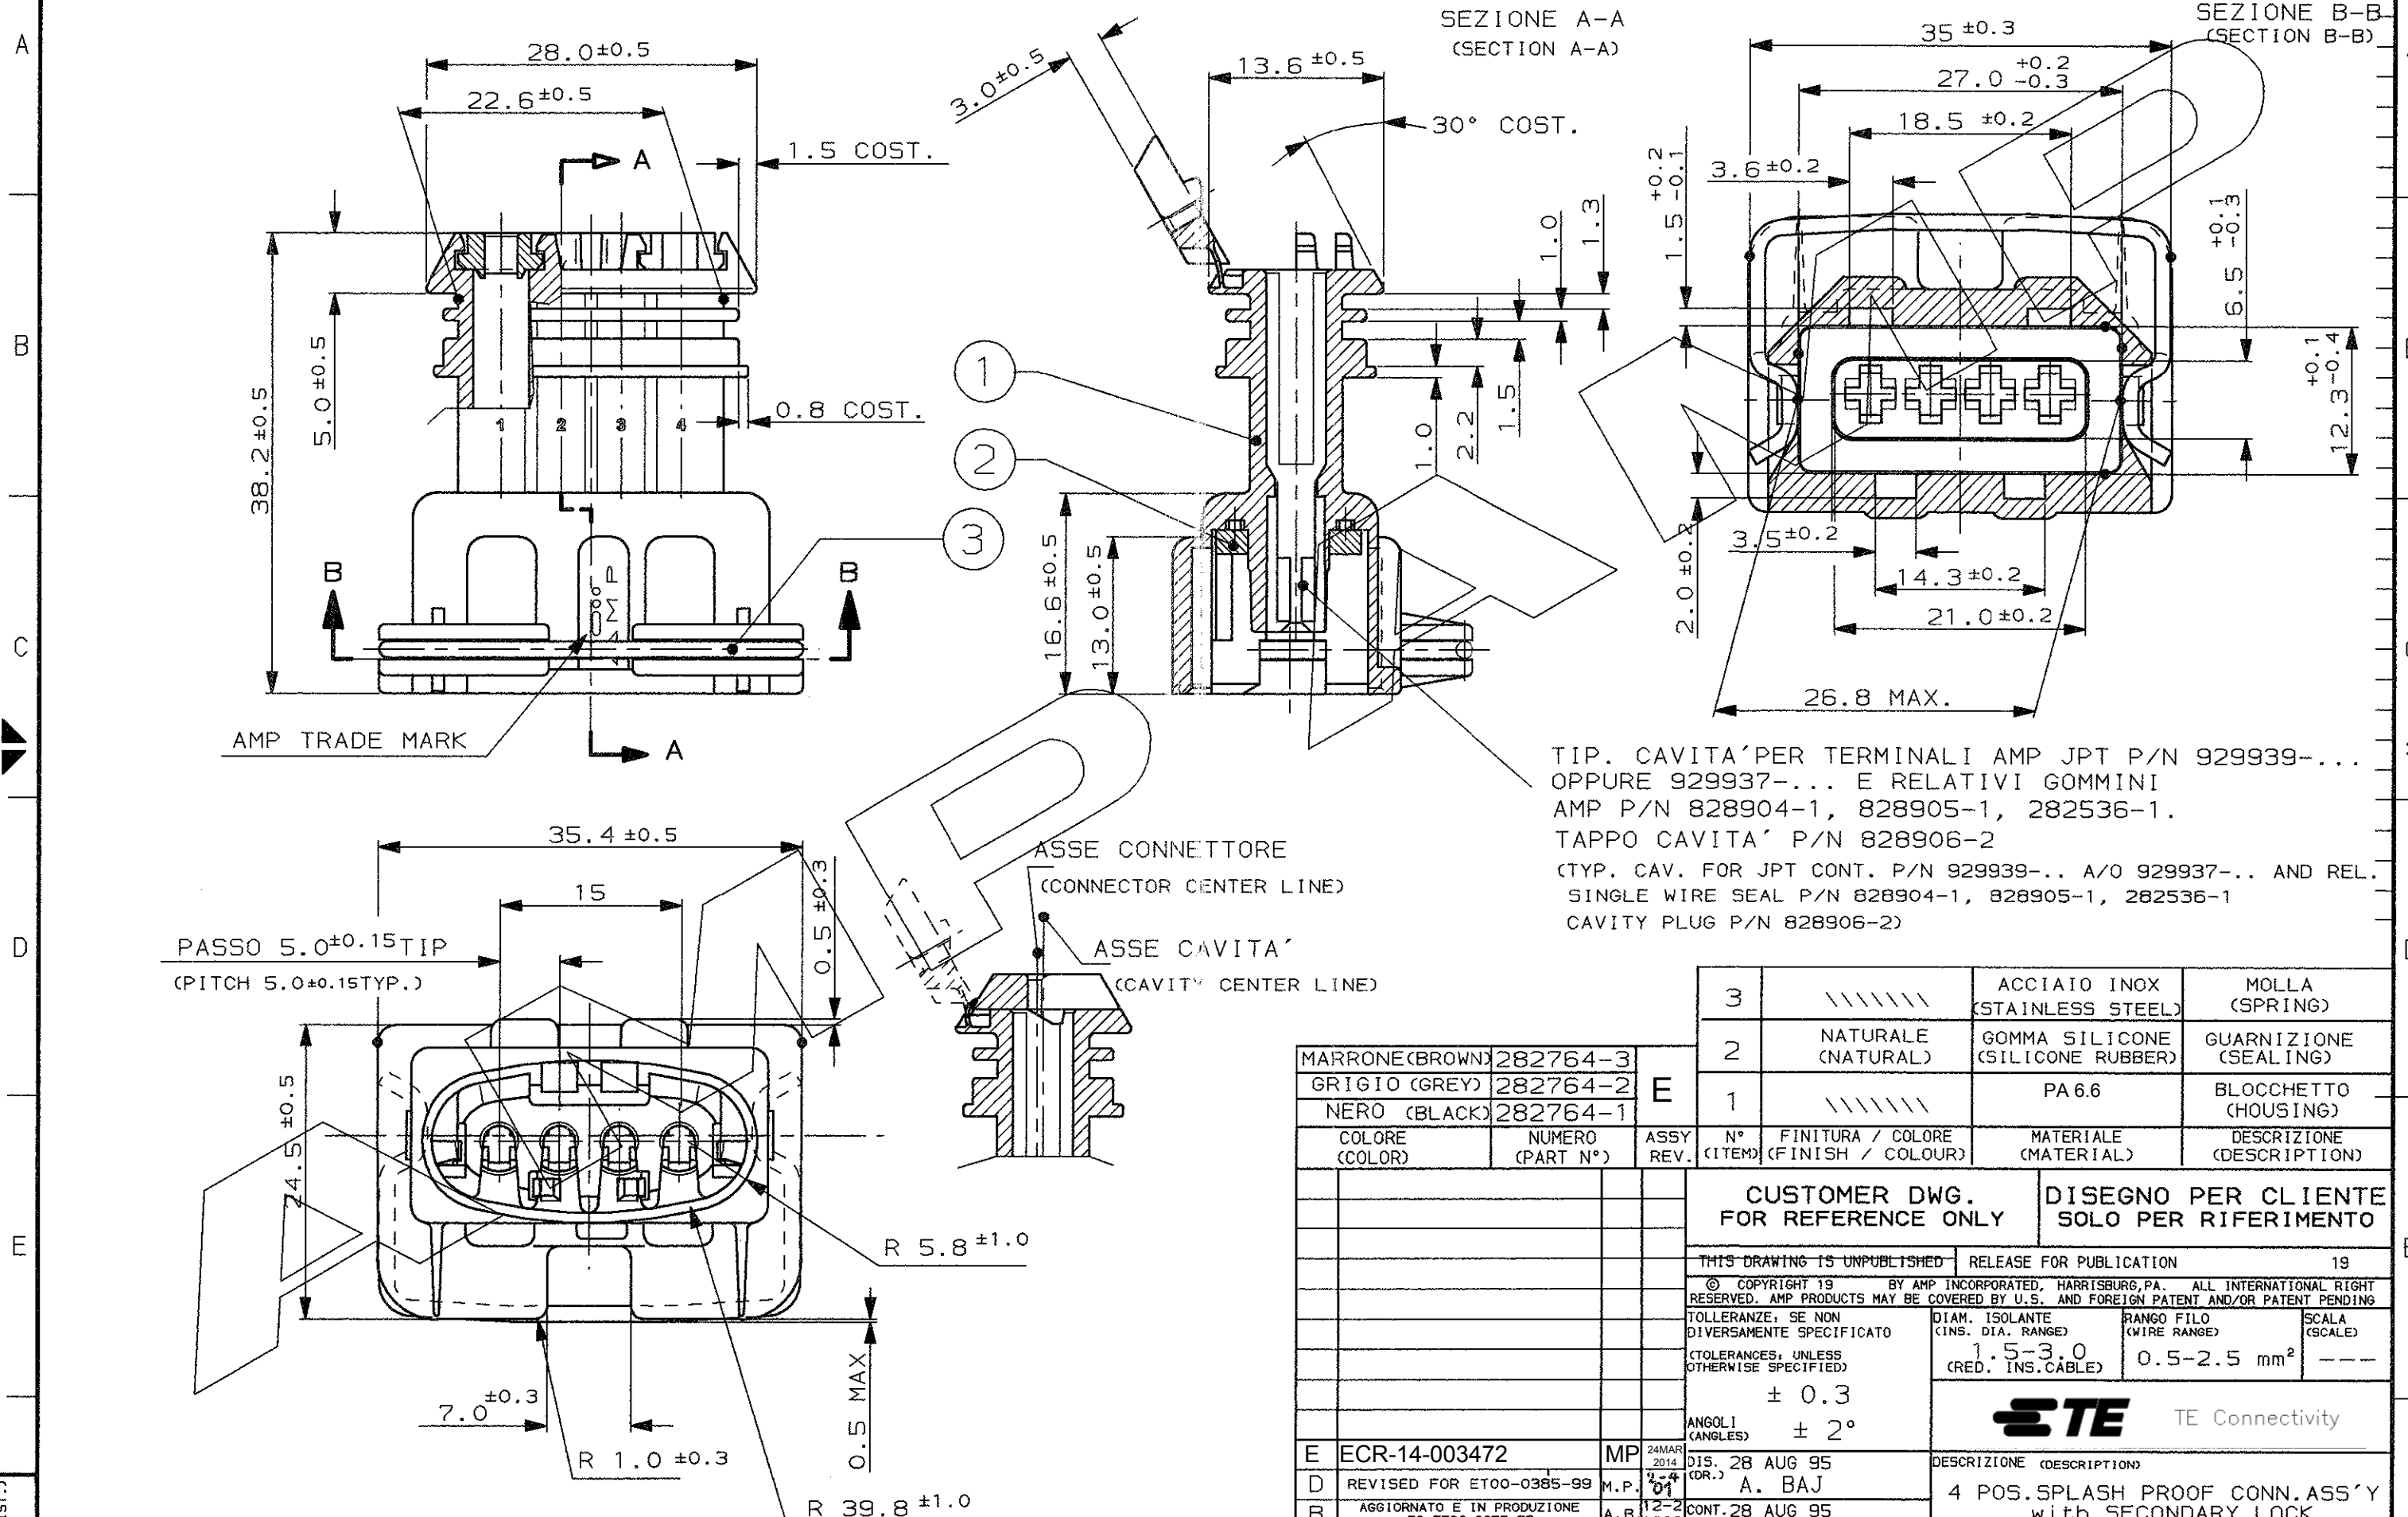

MARRONE (BROWN)	282764-3
GRIGIO (GREY)	282764-2
NERO (BLACK)	282764-1

COLORE (COLOR)	NUMERO (PART N°)	ASSY REV.
----------------	------------------	-----------

3	//////	ACCIAIO INOX (STAINLESS STEEL)	MOLLA (SPRING)
2	NATURALE (NATURAL)	GOMMA SILICONE (SILICONE RUBBER)	GUARNIZIONE (SEALING)
1	//////	PA 6.6	BLOCCHETTO (HOUSING)
N° (ITEM)	FINITURA / COLORE (FINISH / COLOUR)	MATERIALE (MATERIAL)	DESCRIZIONE (DESCRIPTION)

CUSTOMER DWG. FOR REFERENCE ONLY

DISEGNO PER CLIENTE SOLO PER RIFERIMENTO

THIS DRAWING IS UNPUBLISHED

RELEASE FOR PUBLICATION

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING

TOLLERANZE, SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)

DIAM. ISOLANTE (INS. DIA. RANGE) 1.5-3.0 (RED. INS. CABLE)

RANGO FILO (WIRE RANGE) 0.5-2.5 mm²

SCALA (SCALE) ---

± 0.3

ANGOLI (ANGLES) ± 2°

E ECR-14-003472

D REVISED FOR ET00-0385-99

B AGGIORNATO E IN PRODUZIONE EC ET00-0075-96

A PRIMA EMISSIONE CON ECN ET00-0217-95

REV. REVISIONI (REVISION RECORD)

MP 24MAR 2014

M.P. 01

A.B. 12-2 1996

A.B. 15-9 1995

DIS. DATA (DATE)

DIS. 28 AUG 95

A. BAJ

CONT. 28 AUG 95 (CHK)

C. TARTARI

APP. (APP.)

DESCRIZIONE (DESCRIPTION)

4 POS. SPLASH PROOF CONN. ASS'Y with SECONDARY LOCK



LOC. SIZE NUMERO (DWG NO)

I A3 C-282764



REV. E

FOGLIO (SHEET) 1 DI (OF) 2

DISTRIBUZIONE (PRINT DIST.)

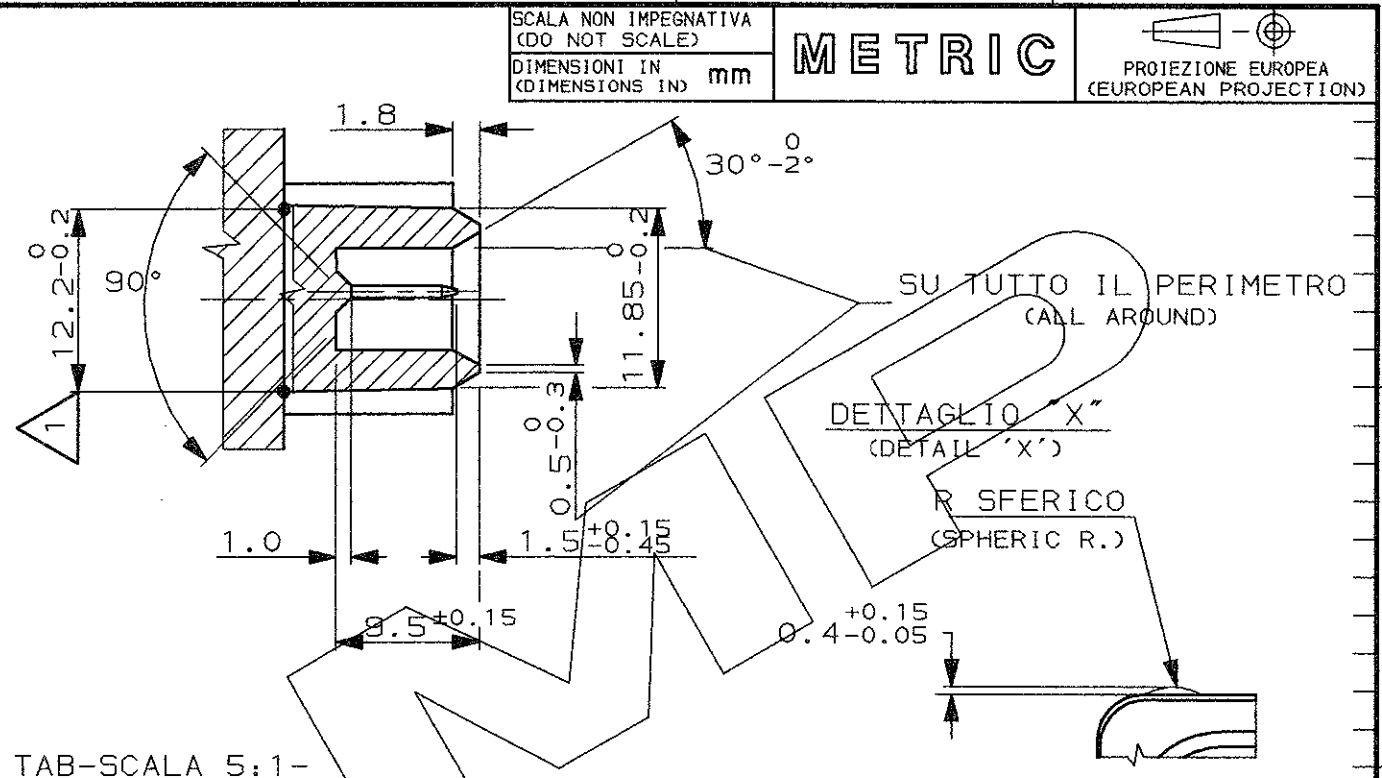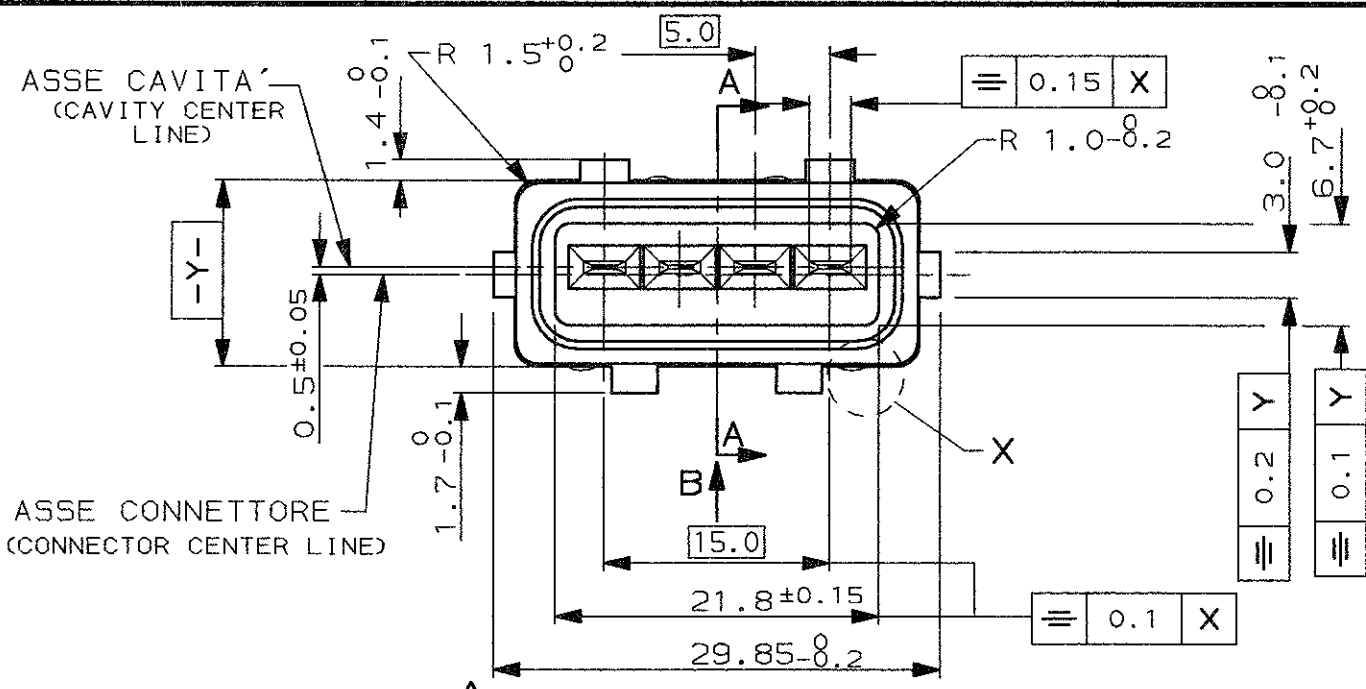

DETT. LINGUETTA TAB-SCALA 5:1-
(ALLOWED ALTERNATIVE PROFILE RADIUS)

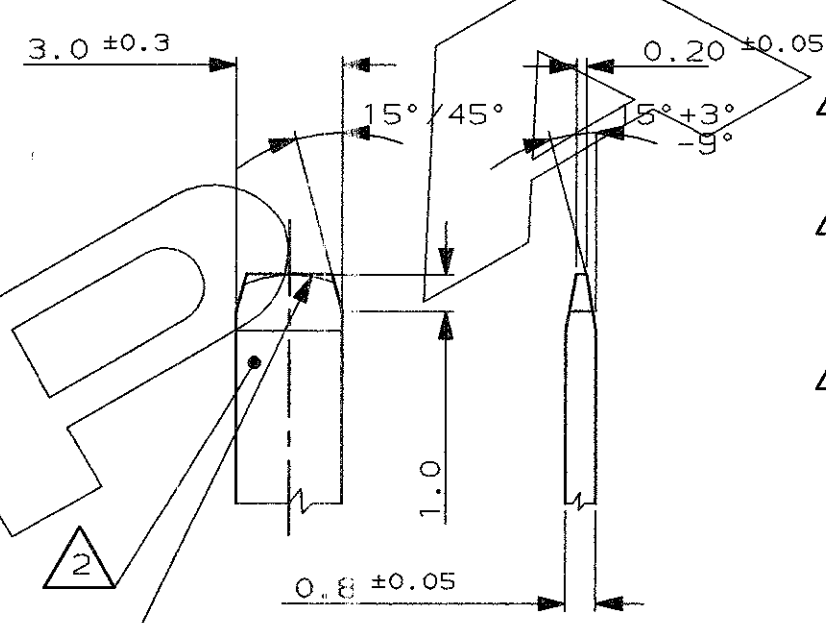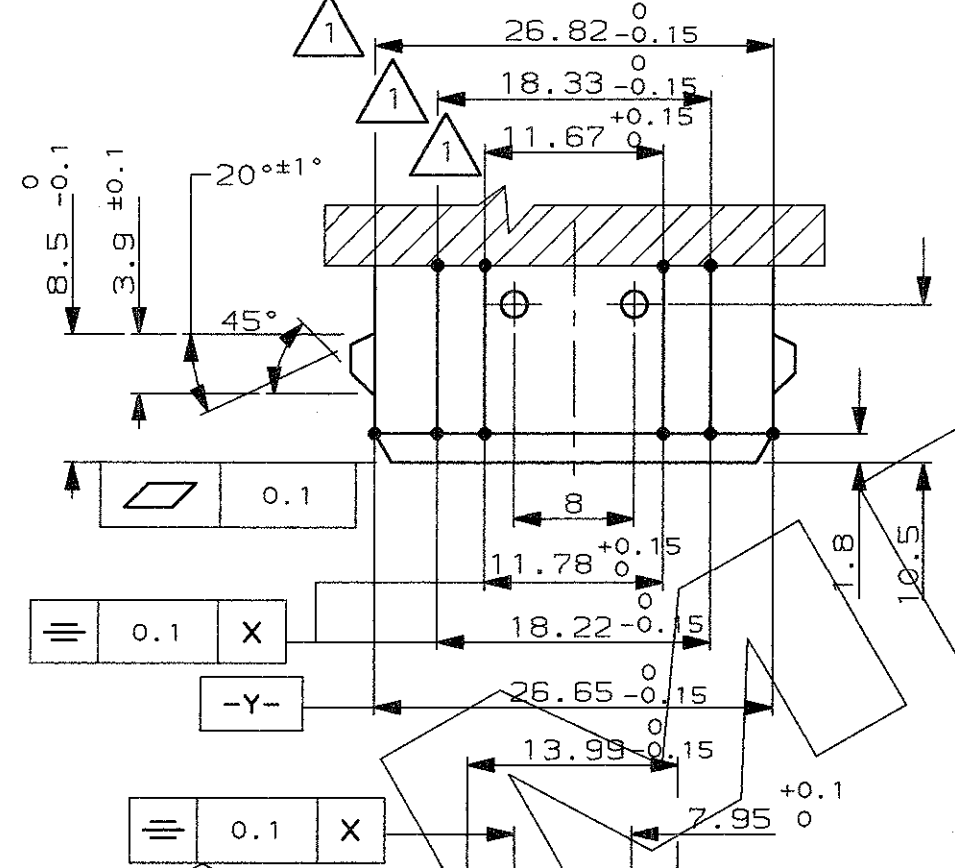


1 QUOTE APPLICABILI PER SFORMATURA PEZZO
(DRAFT PERMITTED TO FACILITATE REMOVAL OF PART FROM THE MOULD)

2 MATERIALE LINGUETTE: LEGA DI RAME STAGNATA, ES. OTTONE STAGNATO.
(TAB CONTACT MATERIAL: TIN PLATED COPPER ALLOY. E.G. BRASS TIN PLATED)

3 MATERIALE BLOCCHETTO: TERMOPLASTICO CARICATO FIBRA VETRO.
(HOUSING MATERIAL: THERMOPLASTIC, GLASS FIBER FILLED)

FORMA ALTERNATIVA PERMESSA CON RAGGIO
(ALLOWED ALTERNATIVE PROFILE WITH RADIUS)

VISTA DA "B"
(VIEW FROM "B")

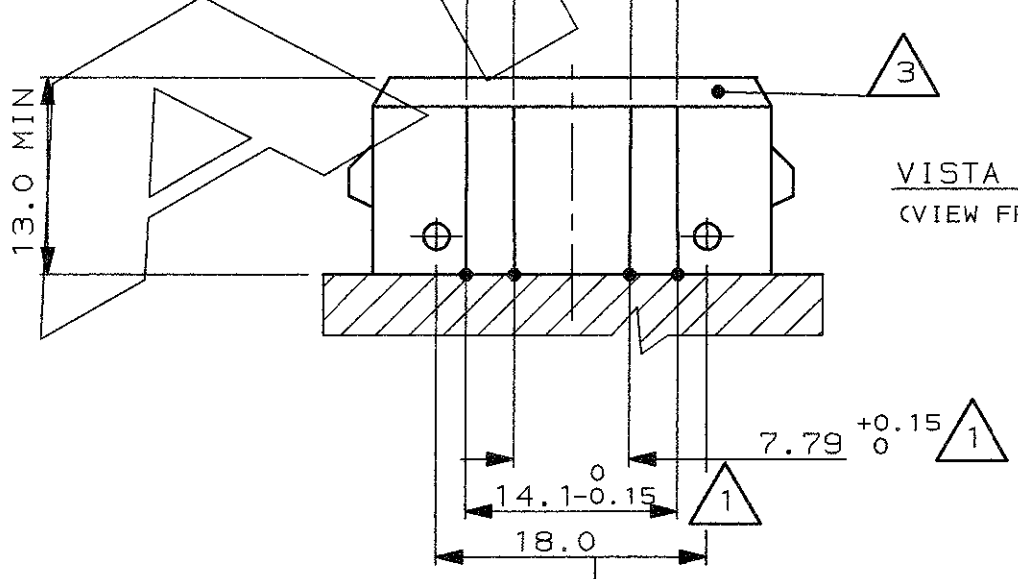

FINITURA / COLORE (FINISH / COLOUR)		MATERIALE (MATERIAL)		NUMERO (PART NUMBER)	
CUSTOMER DWG. FOR REFERENCE ONLY		DISEGNO PER CLIENTE SOLO PER RIFERIMENTO		19	
THIS DRAWING IS UNPUBLISHED		RELEASE FOR PUBLICATION		19	
© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHT RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENT AND/OR PATENT PENDING					
TOLLERANZE: SE NON DIVERSAMENTE SPECIFICATO (TOLERANCES, UNLESS OTHERWISE SPECIFIED)		DIAM. ISOLANTE (INS. DIA. RANGE)		RANGO FILO (WIRE RANGE)	
± 0.3		---		---	
ANGOLI (ANGLES)		± 2°		---	
DIS. (DR.)		---		---	
CONT. (CHK)		---		---	
APP. (CAP)		---		---	
REV. (REV.)		---		---	
REVISIONI (REVISION RECORD)		---		---	
DIS. (DR.)		---		---	
DATA (DATE)		---		---	
SEE SHEET 1 OF 2		DESCRIZIONE (DESCRIPTION)		Foglio (Sheet)	
---		4 POS. SPLASH PROOF CONN. ASS'Y with SECONDARY LOCK		2 OF 2	
---		LOC. SIZE (CONG NO)		REV.	
---		I A3		E	
---		C-282764		---	

DISTRIBUZIONE
(PRINT DIST.)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[282764-1](#)