



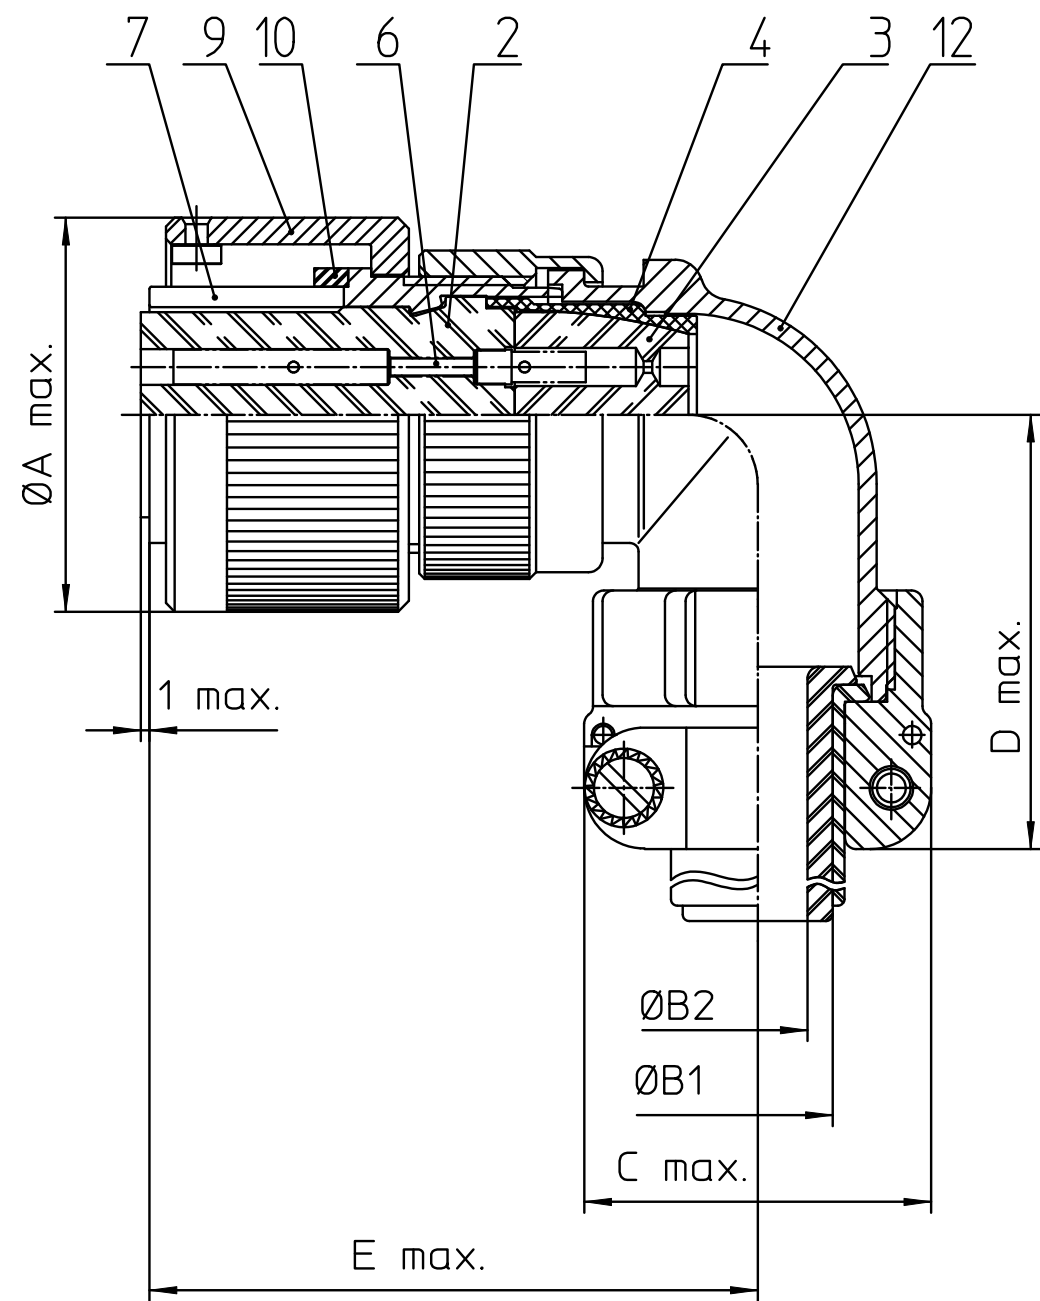

NO.	MASSE / DIMENSION
A	39.9
B1	15.9
B2	-
C	37.5
D	53
E	61



NO.	BESCHREIBUNG / DESCRIPTION
2	ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET
3	DICHTKÖRPER / GROMMET
4	ENDRING / ENDRING
6	KONTAKTBUCHSE / CONTACT SOCKET
7	ZYLINDERGHÄUSE / BARREL
9	ÜBERWURFMUTTER / COUPLING NUT
10	DICHTRING FRONT / FRONT SEALING RING
12	ENDGEHÄUSE / ENDBELL

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.
Specification and Dimensions subject to change
Drawings illustrate normal insulator positioning

Material Specification:
Shell Material: Aluminium alloy
Shell Plating: Zinc cobalt, black (conductive)
Insulator Material: CR-Elastomere
Contact Material: Copper alloy
Contact Plating: Gold 0,5 µm

all dimensions are in mm Dimensions without tolerance indications are general tolerances in acc. with DIN7168m	drawing for CUSTOMER
---	-------------------------

 ITT <i>Engineered for life</i> ITT CANNON GmbH D - 71384 Weinstadt/Germany	<table><tr><td>description</td><td>CA3108E20-33S-B-F80-A176-A232</td></tr><tr><td>Plug, 90°</td><td></td></tr><tr><td>Endbell with clamp and bushing</td><td></td></tr><tr><td>AWG Crimp / Socket / Layout: 20-33</td><td></td></tr></table>	description	CA3108E20-33S-B-F80-A176-A232	Plug, 90°		Endbell with clamp and bushing		AWG Crimp / Socket / Layout: 20-33	
description	CA3108E20-33S-B-F80-A176-A232								
Plug, 90°									
Endbell with clamp and bushing									
AWG Crimp / Socket / Layout: 20-33									
© All rights reserved. Reproduction or issue to third in any form whatever is only permitted with written authorization of ITT Cannon	<table><tr><td>page</td><td>revision</td></tr><tr><td>1/1</td><td>1818 9. Apr 20</td></tr></table>	page	revision	1/1	1818 9. Apr 20				
page	revision								
1/1	1818 9. Apr 20								