


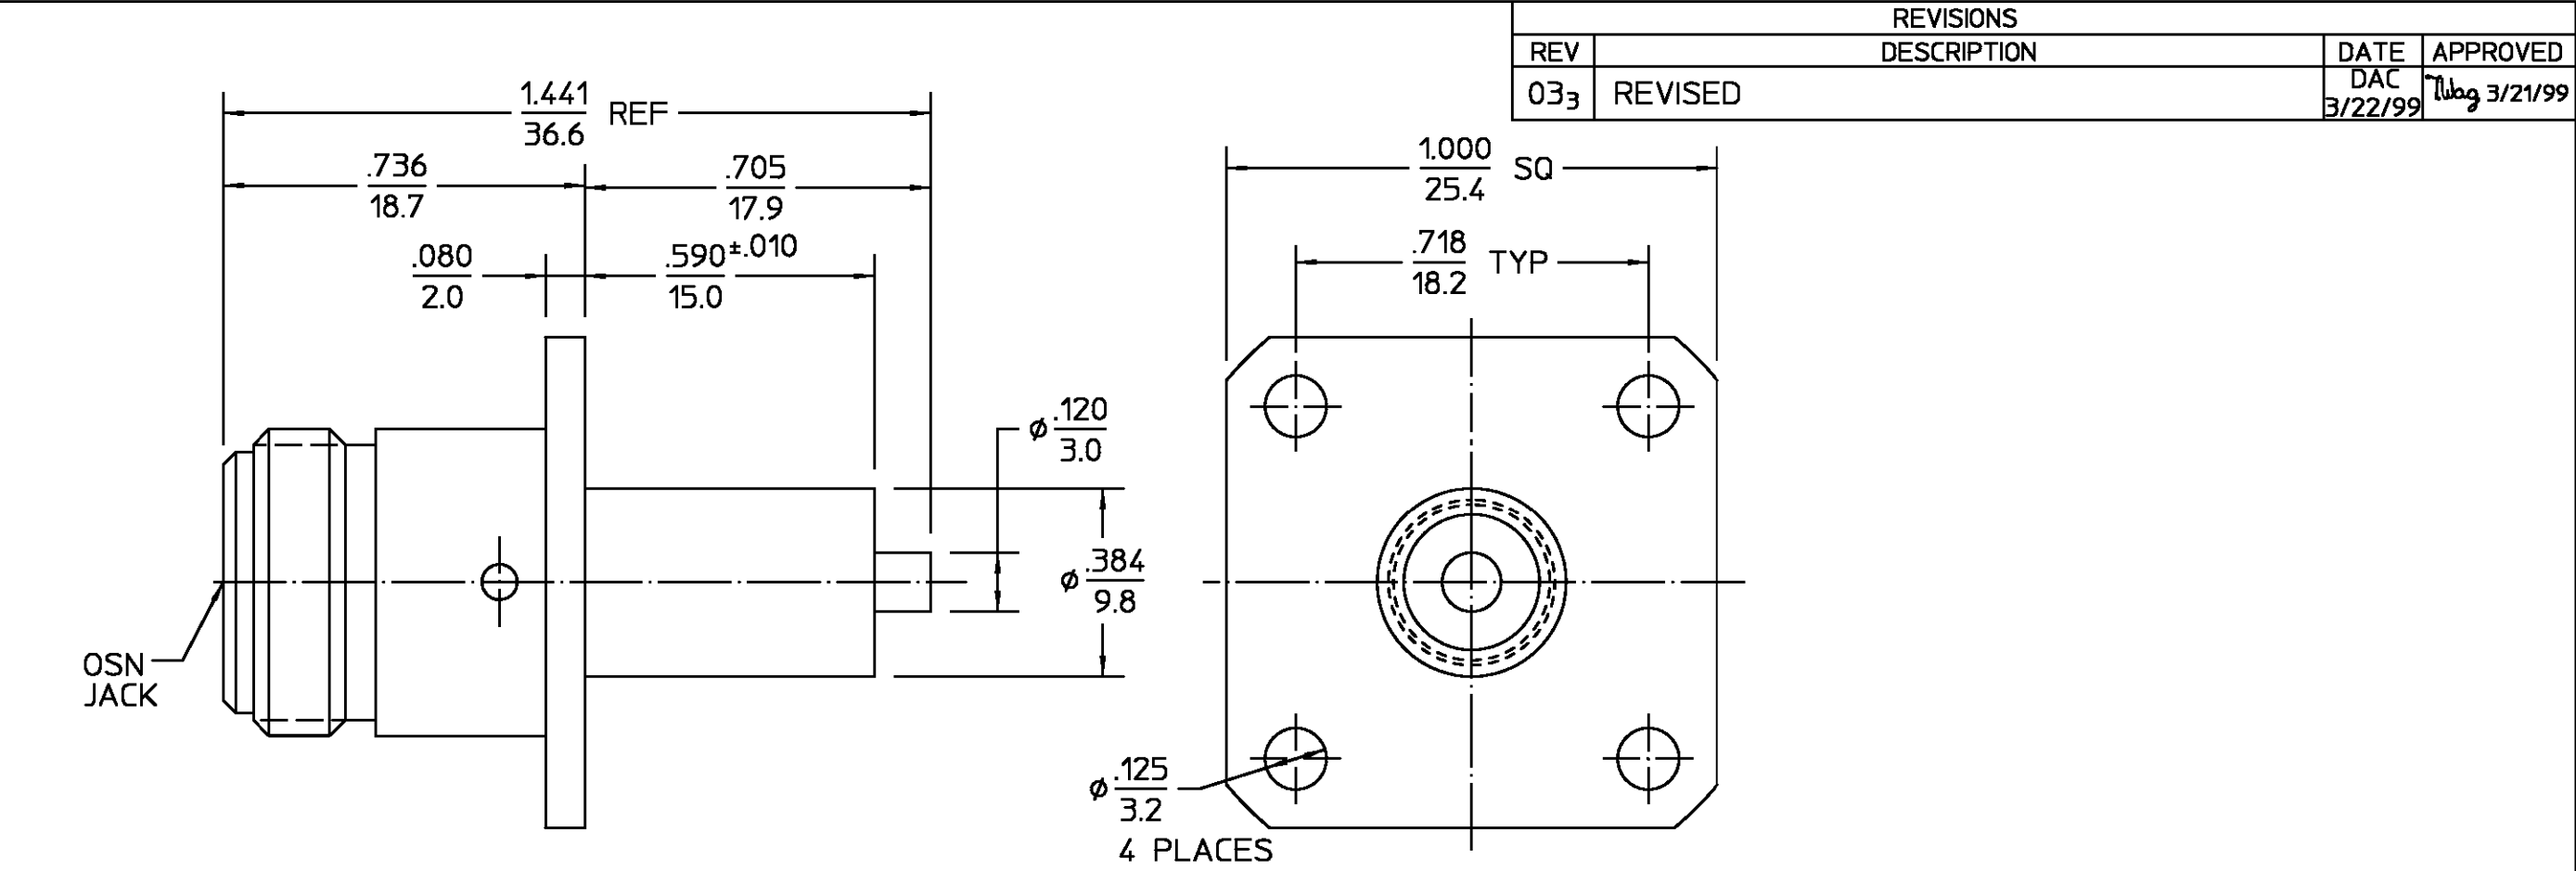

ELECTRICAL	MECHANICAL	ENVIRONMENTAL	HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		PASSIVATE PER ASTM-A380
Nominal Impedance (Ohms) 50	Interface Dimensions MIL-STD-348A, Fig. 304.2	Temperature Rating -65°C to +165°C	DIELECTRIC CENTER CONTACT	TFE FLUOROCARBON PER ASTM-D-1457		N/A
Frequency Range (GHz) DC to 11	Recommended Mating Torque 12 - 15 in-lbs	Vibration MIL-STD-202, Method 204, Condition B.		BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H		GOLD PLATE PER MIL-G-45204 OVER NICKEL PLATE PER QQ-N-290
Volt Rating (VRMS MAX) @ Sea Level 250	Mating Characteristics: Insertion (MAX Lbs) 2.0 Withdrawal (MIN Oz) 2.0	Shock MIL-STD-202, Method 213, Condition I.				
VSWR 1.10 + .01 f(GHz)	Force to Engage and Disengage (In-Lbs MAX) 6.0	Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 85°C	COMPONENT	MATERIAL	FINISH	
Insertion Loss (dB MAX) .07 √f(GHz)	Center Contact Captivation Axial (Lbs) 6.0 Radial (In-Oz) 4.0	Moisture Resistance MIL-STD-202, Method 106	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°	DRAWN BY E.S.C. DATE 12-4-70 CHECKED BY P.R.B. 12-7-70 APPROVED BY B.C. 12-7-70	AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599	
RF Leakage (dB MIN) -[60- f(GHz)]	Cable Retention Axial Force (Lbs) N/A Torque (In-Oz) N/A	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray	These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.	USE ASS'Y PROCEDURE NO. AP. N/A	TITLE OSN 4 HOLE FLANGE MOUNT JACK RECEPTACLE	
Corona, 70,000 Ft (VRMS MIN) 500	Weight (Grams) TBD	.XXX = in XX.X = mm	SIZE B CODE IDENT NO. 26805		3052-1201-02	REV 03 ₃
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 2,500			SCALE 3 : 1		SHEET 1 OF 1	
Contact Resistance (Milliohms MAX) Center Contact 4.0 Outer Contact 0.2 Cable to Housing N/A						
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 1,500						
I.R.(Megohms MIN) 5,000						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[3052-1201-02](#)