


- 1 STAMP AMP 18-16, APPROX AS SHOWN.
- 2 WIRE INSULATION DIA IS
 $\phi 1.4-2.8\text{mm}$ [$\phi .055-.110$].
- 3 TONGUE MATERIAL THICKNESS IS 0.79 ± 0.05
[$.031 \pm .002$].
- 4 APPLIES FROM EDGE OF WIRE BARREL TO
CENTER OF STUD HOLE.
- 5 MATERIAL: BODY - COPPER PER ASTM B-152
SLEEVE - NYLON.
- 6 FINISH: BODY - TIN PLATE PER ASTM B-545
SLEEVE - COLOR, ORANGE.

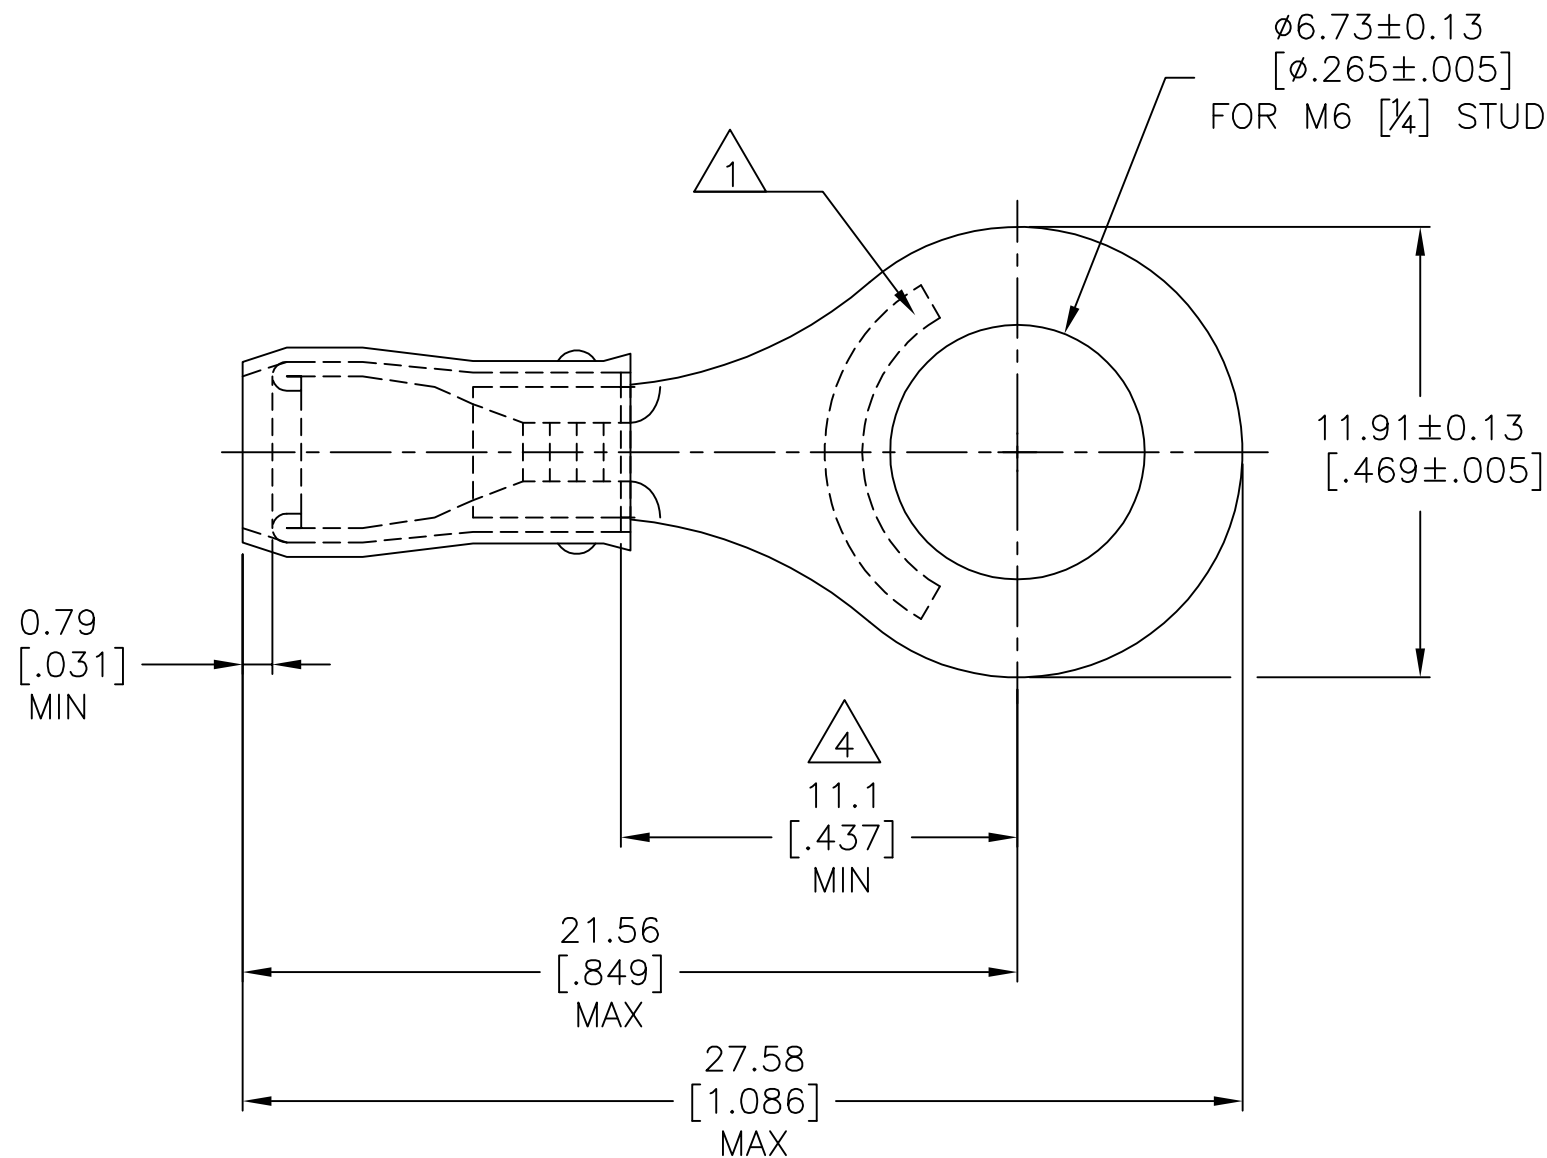

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN JR RUTH 19JUN07		 TE Connectivity				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752			VOLTAGE RATING: 300 V MAX	DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 [.008] 3 PLC ± - 4 PLC ± - ANGLES ± -	CHK T MICHIELUTTI 19JUN07	NAME TERMINAL, RING TONGUE, PIDG, WIRE SIZE: 18-16 AWG				
	FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111		CIRCULAR MIL AREA: 0.81-1.65mm² [1600-3260] SOLID OR STRANDED	MATERIAL 			FINISH 					
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.					PRODUCT SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C=152879	RESTRICTED TO —		
							APPLICATION SPEC —	WEIGHT —		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[152879](#)