


B2013FNL

○ ADSL CHOKE

NOTES: UNLESS OTHERWISE SPECIFIED





1. OPERATING TEMPERATURE: 0°C TO +70°C
2. STORAGE TEMPERATURE: -20°C TO +125°C
3. COMPLIANCE TO J-STD:
 - J-STD-002: SOLDERABILITY AT 245°C REFLOW PROFILE
 - J-STD-020: LEVEL 1, NO MOISTURE SENSITIVE
 - J-STD-075: R7, 245°C MAXIMUM THROUGH REFLOW SOLDER
4. DIMENSIONS ARE IN INCHES.
 - TOLERANCE:
 - .XX ±.01
 - .XXX ±.005
5. OPTIONAL TAPE & REEL PACKAGING CAN BE ORDERED BY ADDING A "T" SUFFIX TO THE PART NUMBER; ie: B2013FNLT.

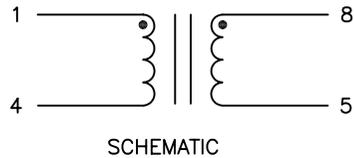

ELECTRICAL SPECIFICATIONS: @ 25°C

Part Number	Turns Ratio (1-4) : (8-5) 100KHz, 0.02Vrms (±1.5%)	Primary Inductance (1-4) 100KHz, 0.02Vrms (mH)	LL (1-4) WITH (8-5) Shorted 100KHz, 0.02Vrms (uH Max)
B2013FNL	1.0	6.3-11.7	1.0
Cww (1-4) to (8-5) 100KHz, 0.02Vrms (pF Max)	Distributed Capacitance (1-4) 1MHz, 0.02Vrms (pF Max)	DCR (1-4) or (8-5) (OHMS Max)	HIPOT (1-4) To (8-5) (Vrms,60s)
120	6.0	1.0	1500

MECHANICAL SPECIFICATIONS:

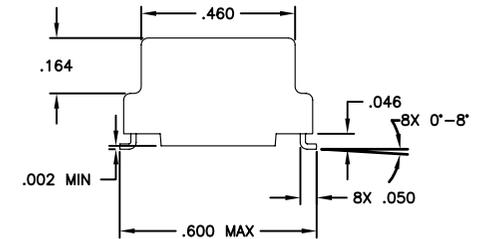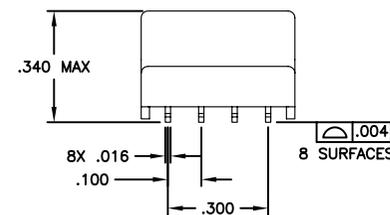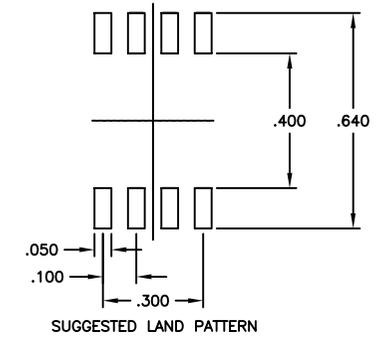

© Copyright, 2014. Pulse Electronics Corp. All rights reserved. Pulse confidential & proprietary. (06/11/2014)

PRODUCT DESCRIPTION:

CHK, SGL, ADSL, LA, SPL, 9mH

SHEET:

1 OF 1

PART NO.

B2013FNL

DATASHEET REV.

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Pulse:

[B2013FNLT](#) [B2013FNL](#)