

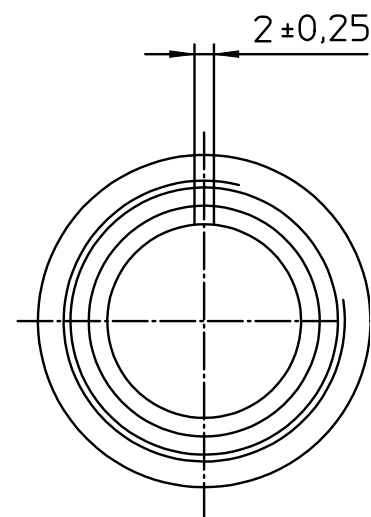


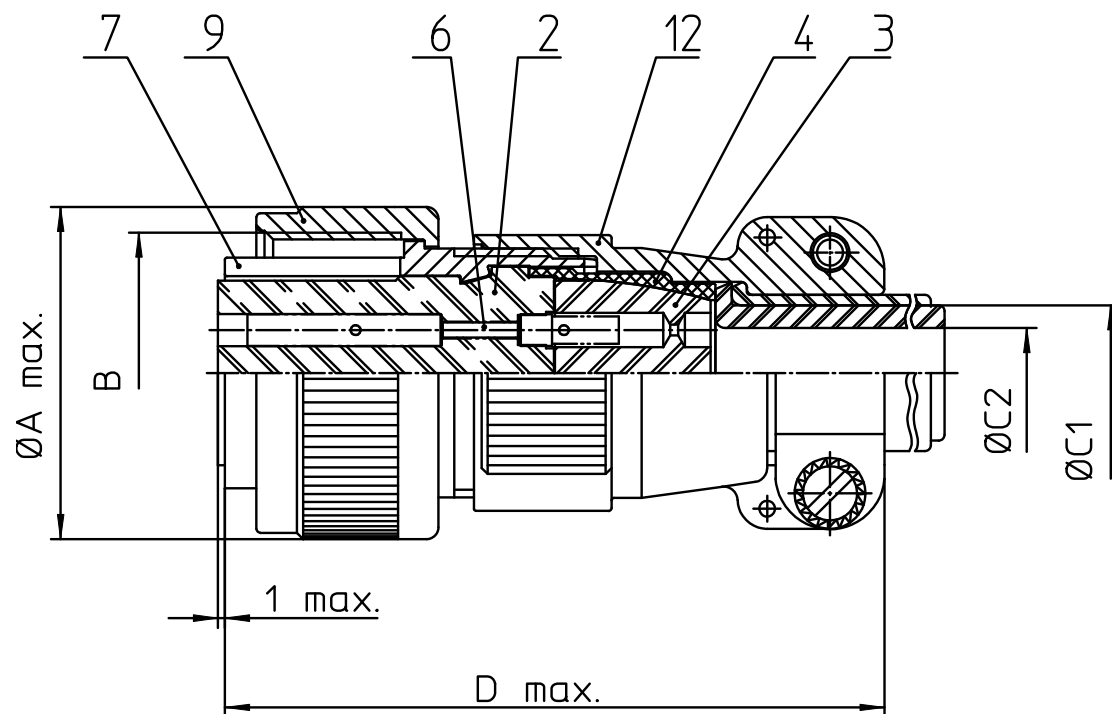

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 43.8              |
| B   | 1 1/2-18NEF-2B    |
| C1  | 21.5              |
| C2  | 16.6              |
| D   | 76                |

| NO. | BESCHREIBUNG / DESCRIPTION              |
|-----|-----------------------------------------|
| 2   | ISOLIERKÖRPER BUCHSE / INSULATOR SOCKET |
| 3   | DICHTKÖRPER / GROMMET                   |
| 4   | ENDRING / ENDRING                       |
| 6   | KONTAKTBUCHSE / CONTACT SOCKET          |
| 7   | ZYLINDERGHÄUSE / BARREL                 |
| 9   | ÜBERWURFMUTTER / COUPLING NUT           |
| 12  | ENDGEHÄUSE / ENDBELL                    |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                |
|---------------------|--------------------------------|
| Shell Material:     | Aluminium alloy                |
| Shell Plating:      | Black Zinc Cobalt (conductive) |
| Insulator Material: | Neoprene                       |
| Contact Material:   | Copper alloy                   |
| Contact Plating:    | Hard silver                    |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3106E24-9S-A206  
Plug, straight  
Endbell with clamp and bushing  
Solder Cup / Socket / Layout: 24-9

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 969 9. Apr 20