

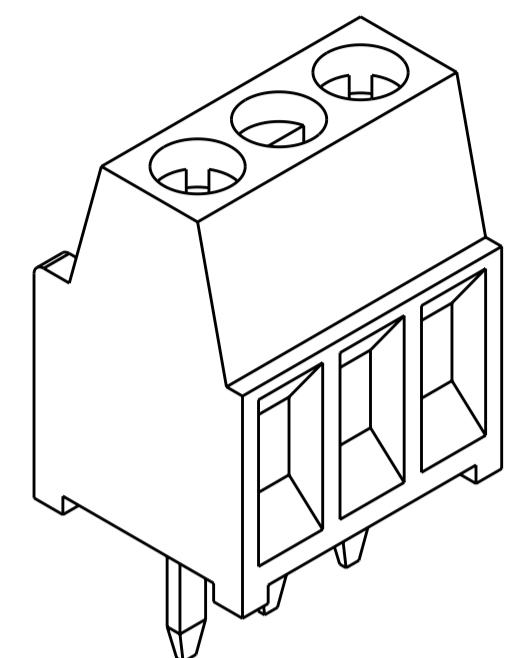


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	20
© COPYRIGHT 20	ALL RIGHTS RESERVED.	


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVD
FT	0	A1		REVISED PER ECO-11-007905	15APR2011	HMR	CR

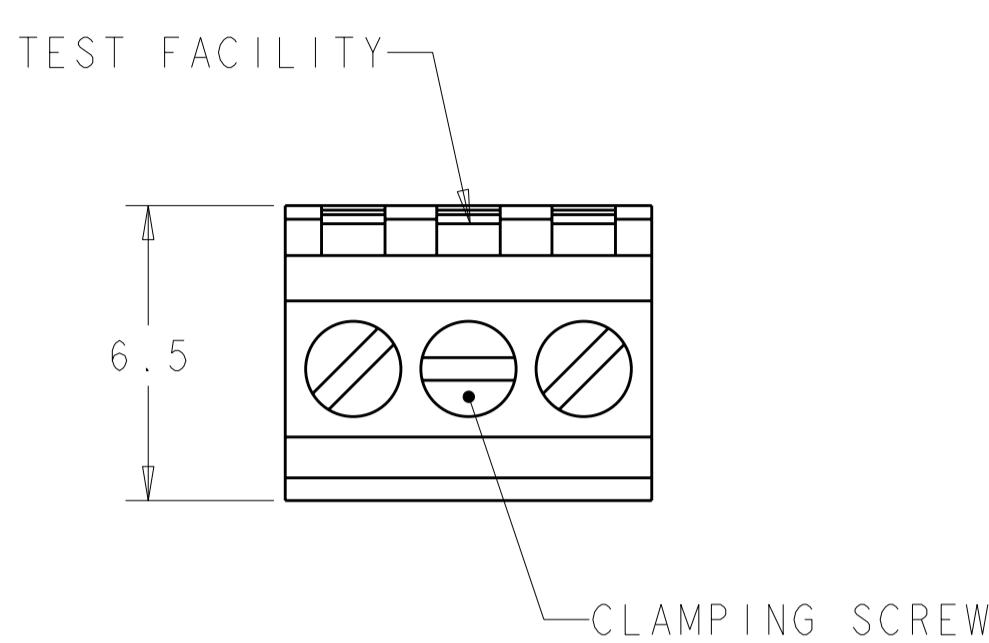

1546215-3 AS SHOWN

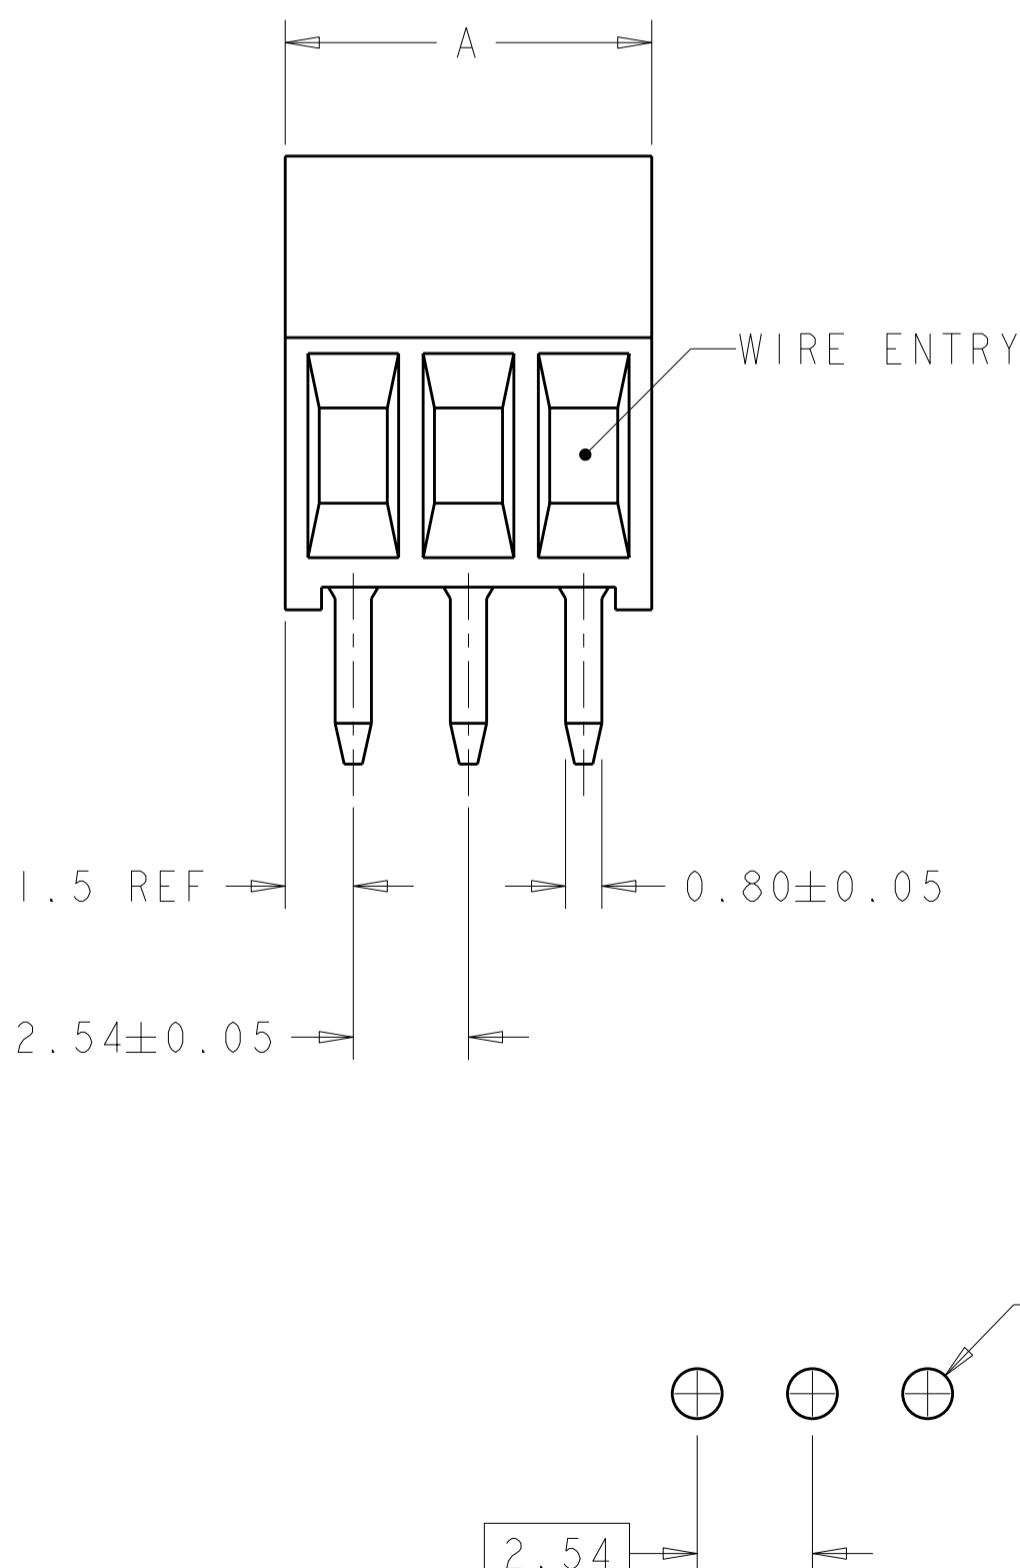

RECOMMENDED PC BOARD LAYOUT

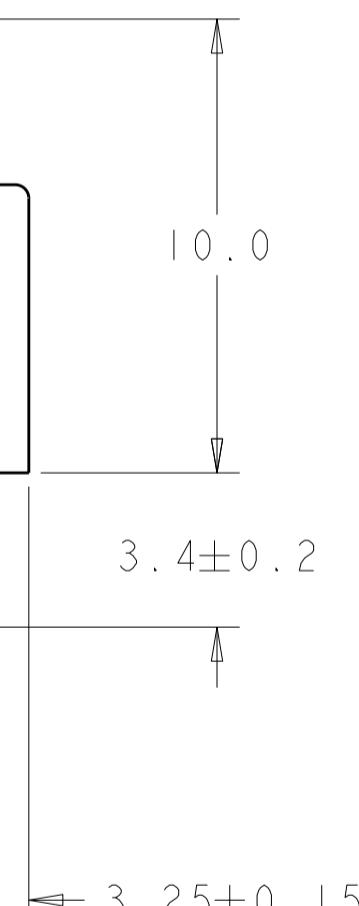

MATERIAL AND FINISH:
 HOUSING: PA 6-6, UL 94-V0, COLOR: GRAY.
 CLAMP: BRASS, NICKEL PLATED.
 TERMINAL: BRASS, TIN PLATED.
 CLAMPING SCREW: M1.6, STAINLESS STEEL.

2. SUITABLE FOR 1,6-2,4mm PC BOARD THICKNESS.
3. WIRE RANGE: 16-30 AWG.
4. RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC. FILE N° E60677.
5. POSSIBILITY TO PUT TWO OR THREE TERMINAL BLOCKS
SIDE BY SIDE BY INCREASING THE DIAMETER OF THE
PCB HOLES TO MINIMUM 1,3mm.
6. TORQUE: 1.73 in-lbs MAX

30.94	12	I-1546215-2
28.40	11	I-1546215-1
25.86	10	I-1546215-0
23.32	9	I-1546215-9
20.78	8	I-1546215-8
18.24	7	I-1546215-7
15.70	6	I-1546215-6
13.16	5	I-1546215-5
10.62	4	I-1546215-4
8.08	3	I-1546215-3
5.54	2	I-1546215-2
A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 09MAR2004	TE Connectivity
DIMENSIONS:	mm	CHK C. RICHARD 09MAR2004	
0 PLC	±.3	APVD C. RICHARD 09MAR2004	
1 PLC	±.25	PRODUCT SPEC 108-20166	
2 PLC	±.25	APPLICATION SPEC 114-20079	
3 PLC	±.25	WEIGHT -	
4 PLC	±.25	CUSTOMER DRAWING	
ANGLES	±.2		
MATERIAL	△		
FINISH	△		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-1546215-1](#)