


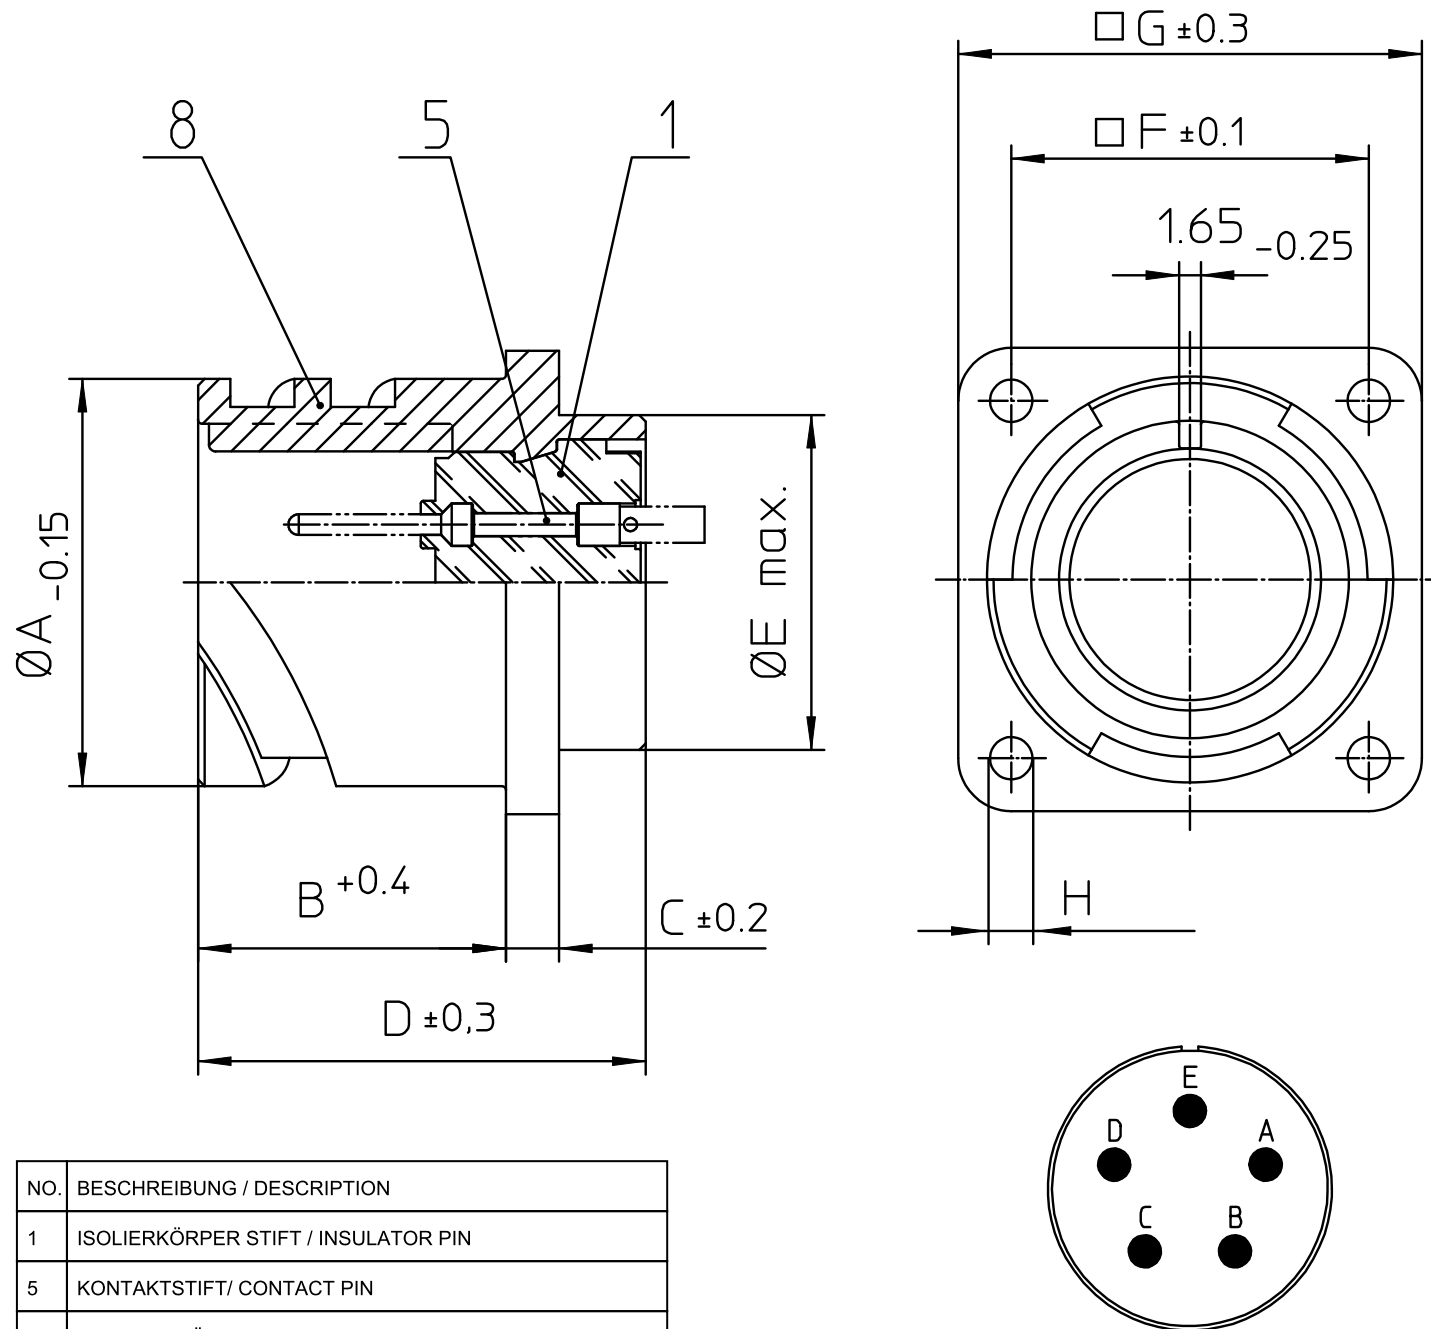

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 27.4              |
| B   | 18.2              |
| C   | 3.2               |
| D   | 24.7              |
| E   | 22.4              |
| F   | 24.6              |
| G   | 32.5              |
| H   | 3.2               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 5   | KONTAKTSTIFT/ CONTACT PIN           |
| 8   | DOSENGEHÄUSE / SHELL                |

Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

|                         |                                               |
|-------------------------|-----------------------------------------------|
| Material Specification: |                                               |
| Shell Material:         | Aluminium alloy                               |
| Shell Plating:          | Olive drab chromate over cadmium (conductive) |
| Insulator Material:     | CR-Elastomere                                 |
| Contact Material:       | Copper alloy                                  |
| Contact Plating:        | Hard silver                                   |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description CA3102E16S-8P-B-05  
Box mounting receptacle (rear mount, through holes)

Solder Cup / Pin / Layout: 16S-8

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page 1/1  
revision 1939 1. Oct 20