


- △ THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- △ DOUBLE BAR POLARIZATION
- △ CENTER POLARIZATION SLOT
- △ FOR 10 POSN ASSEMBLY, SLOT OMITTED WHERE INDICATED
- △ NUMBER 1 POSITION.
- △ OPTIONAL AMP IDENTIFICATION NUMBER (DATE CODE). LOCATION APPROXIMATELY WHERE SHOWN.
- △ MATERIAL: HOUSING: GLASS FILLED NYLON, FLAME RETARDANT, BLACK. POSTS: BRASS.
- △ POSTS: GOLD FLASH OVER PALLADIUM-NICKEL PLATE, .000030 MIN TOTAL ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.
-OR-
.000030 MIN GOLD PLATE ON THE MATING SURFACES, .000100 MIN TIN-LEAD PLATE ON THE SOLDER-TAILS, .000050 MIN NICKEL UNDERPLATE ON THE ENTIRE POST.

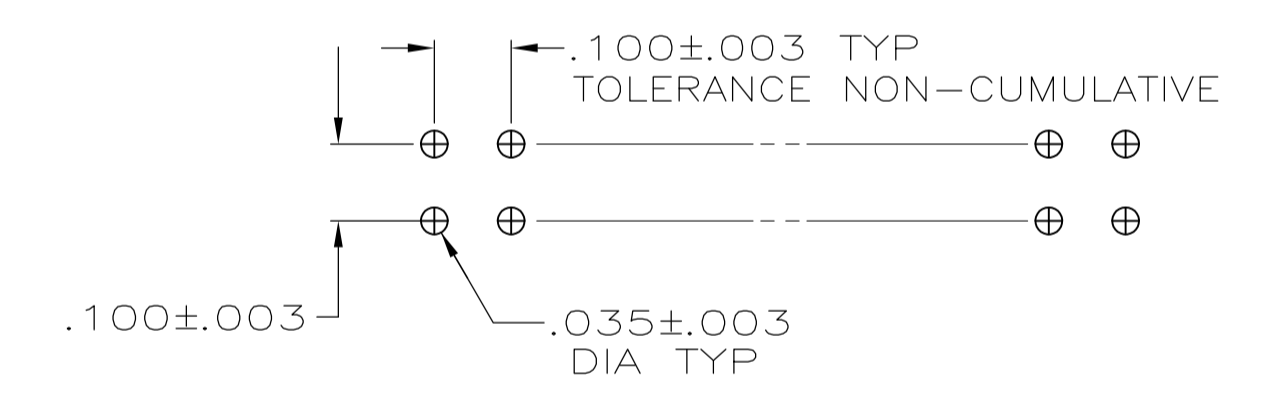

RECOMMENDED HOLE LAYOUT FOR MANUAL INSERTION

	1.800	1.400	14	30	1-104128-2
OBSOLETE	1.500	1.100	11	24	1-104128-1
OBSOLETE	3.300	2.900	29	60	1-104128-0
	2.800	2.400	24	50	104128-9
OBSOLETE	2.500	2.100	21	44	104128-8
OBSOLETE	2.300	1.900	19	40	104128-7
	2.000	1.600	16	34	104128-6
	1.600	1.200	12	26	104128-5
	1.300	.900	9	20	104128-4
	1.100	.700	7	16	104128-3
	1.000	.600	6	14	104128-2
	.800	.400	4	10	104128-1
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN H. MOLL	DATE 03-10-87	CHK T. CLARK	DATE 3-11-87	NAME	TE Connectivity
0 PLC ± -	1 PLC ± -	APVD R. FLICKER	PRODUCT SPEC	108-40018	APPLICATION SPEC	SIZE	CAGE CODE
2 PLC ± -	3 PLC ± .005	WEIGHT	A1	00779	C=104128	SCALE	4:1
4 PLC ± -	ANGLES ± -	CUSTOMER DRAWING	SHEET	1 OF 1	REV	M1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104128-5](#)