


COIL: @ 25°C
 RESISTANCE 4000 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE VOLTAGE 12.8 VDC
 TURN-ON BASE CURRENT 0.5 mADC
 MUST RELEASE 8.0 VDC MAX, 1.37 VDC MIN.

ENVIRONMENT:
 VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: TURN-ON TIME 3.5 MS MAX
TURN-OFF TIME 7.5 MS MAX
CONTACT STABILIZATION TIME 2.0 MS MAX

CUSTOMER DATA SHEET

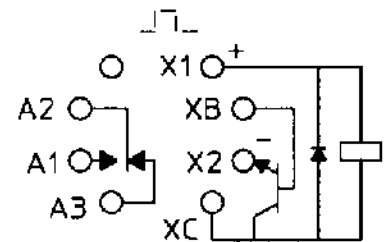

CONTACT RATING: LOW LEVEL TO 1A
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 10/17/97 *CK JERRY C 10/17/97*

COMMUNICATIONS
INSTRUMENTS, INC.

CUST. QPL
 CUST. NO. M28776/4-030M

TYPE J1MST RELAY

J1MSPT-26XM

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[J1MSPT-26XM](#)