

TMM-112-01-F-S-SM

TMM SERIES

LOW-PROFILE SMT HEADER

Yes

Yes

UL
FILE NO. E111594

- Other platings

Note:
Some lengths, styles and options are non-standard, non-returnable.

Specify
2SN-BK-G
for 2 mm
shunt with
Gold plating.

Figure 1 shows the dimensions of the test specimens. The dimensions are as follows:

- Width: (1.95) ± 0.077
- Height: (4.45) ± 0.175
- Slot width: (3.99) ± 0.157

(2.00 mm)
.0787" pitch

(2.00 mm)
.0787"
pitch

(2.77 mm)
.109" Low Profile

- Pick & place pads
- Alignment pins
- Tape & reel packaging

TMM

**1 NO. PINS
PER ROW**

LEAD STYLE

PLATING OPTION

ROW OPTION

SM

OTHER OPTION

02 thru 40

**Specify
LEAD
STYLE
from
chart
below.**

-F
= Gold flash on post,
Matte Tin on tail

-L
= 10 μ" (0.25 μm)
Gold on post,
Matte Tin on tail

-S
= 30 μ" (0.76 μm)
Gold on post,
Matte Tin on tail

-T
= Matte Tin

—S
= Singl
Row


—D
= Doub
Row

—A
= Alignment Pin
(Metal or plastic at
Samtec's discretion)
(5 positions minimum)
(—D only)


— “XXX”
= Polarized Position
(Specify position of
omitted pin)

-P
= Pick & Place Pad
(3 positions minimum)

-TR
= Tape & Reel Packaging
(3 thru 36 positions only)



LEAD STYLE	A	MATES WITH
-01	(3.20) .126	SQT, SQW, ESQT, TLE, SMM, MMS, TCSD
-04	(1.91) .075	CLT
-05	(1.65) .065	
-06	(4.27) .168	CLT-BE

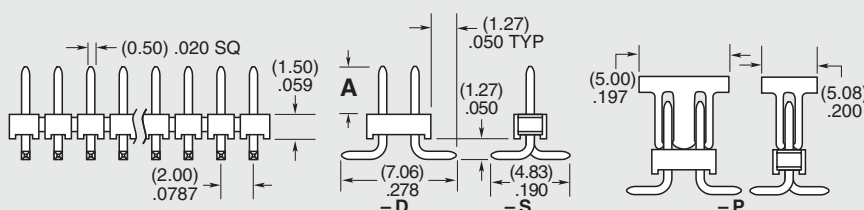

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

*All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.*

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[TMM-108-01-T-S](#)