

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD


F

REDRAWN PER 0720-0377-94

100CT94

LO

ME

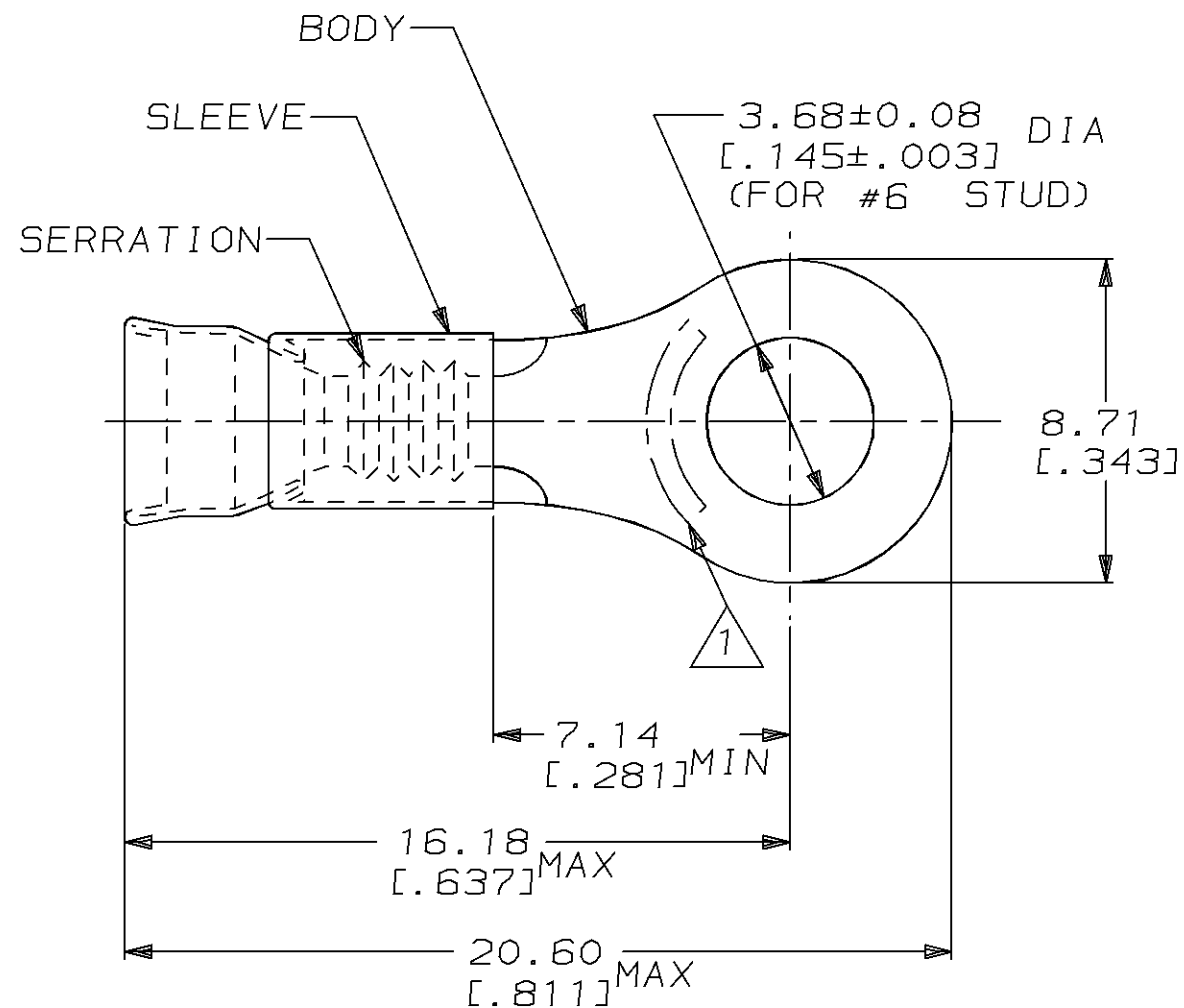

1 STAMP AMP 16-14*APPROX AS SHOWN

2. WIRE INSUL DIA, 3.05-4.32 [0.120-0.170]

3. TONGUE MATL THK, 0.79±0.05 [0.031±0.002]

1000


LOOSE PIECE

322373

QTY

PACKAGE TYPE

PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING
TEMPERATURE:
343°C [650°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:
mm [in]TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ±-
1 PLC ±-
2 PLC ±0.20 [0.008]
3 PLC ±-
4 PLC ±-
ANGLES ±-MATERIAL
BODY, CU PER ASTM B152
SLEEVE, NI SIL PER
ASTM B122FINISH
BODY, NP, QQ-N-290

DWN 100CT94

CHK 100CT94

APVD 100CT94

S BORTNER

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

AMP Incorporated
Harrisburg, PA 17105-3608NAME
TERMINAL, RING TONGUE,
STRATOTHERM, DIAMOND GRIP,
WIRE SIZE, 16-14 AWGSIZE
A3CAGE CODE
00779DRAWING NO
C-322373SCALE
6:1SHEET
1 OF 1REV
F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[322373](#)