



CONFIGURATION	PART NUMBER	LENGTH
3 PIN MINI, FEMALE RECEPT	MN34PW02M	NA

DIMENSIONS

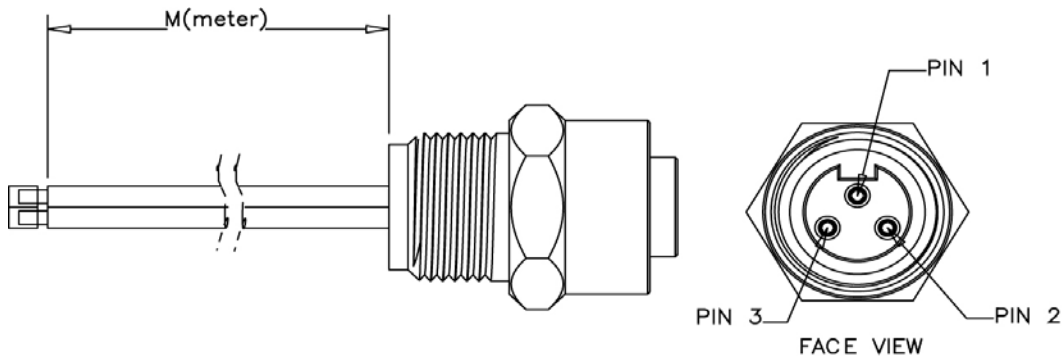

TOLERANCE
0-2.99 M = ±100.0 mm
3-8.99 M = ±150.0 mm
9-14.99 M = ±300.0 mm
15-29.99 M = ±450.0 mm
30-45.99 M = ±600.0 mm

WIRING DIAGRAM

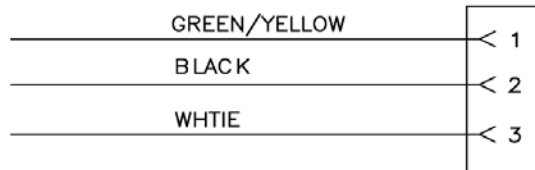

TECHNICAL DATA

TEMPERATURE RANGE:	-20C to +105C
PROTECTION:	IP 68, NEMA 6P
VOLTAGE RATING:	600VAC/600VDC
AMPERAGE:	10A
BODY:	OIL RESISTANT PVC
CONTACTS:	COPPER ALLOY
CONTACT PLATING:	5 INCHES (MIN) GOLD, OVER 25 INCHES (MIN) NICKEL
CONNECTOR FACE:	PVC
COUPLER:	MACHINED ALUMINUM, ANODIZED
WIRE TYPE:	16 AWG, 600 V, MTW OR UL 1015
RECEPTACLE HOUSING:	MACHINED ALUMINUM, ANODIZED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[MN34PW02M030](#)